



中国认可
国际互认
检测
TESTING
CNAS L5516

RADIO TEST REPORT-BLE ETSI EN 300 328 V2.2.2 (2019-07)

Product : Gateway



Trade Mark :



Model Name : G1-E

Family Model : N/A

Report No. : S22080401505001

Prepared for

Shenzhen Minew Technologies Co., Ltd.

3rd Floor, I Building, Gangzhilong Science Park, Qinglong Road, Longhua District, Shenzhen City,
China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China

Tel: 400-800-6106, 0755-2320 0050 / 2320 0090

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name Shenzhen Minew Technologies Co., Ltd.
Address 3rd Floor, I Building, Gangzhilong Science Park, Qinglong Road,
Longhua District, Shenzhen City, China
Manufacturer's Name Shenzhen Minew Technologies Co., Ltd.
Address Building 3, Instrument World Industrial Park, No. 306, Guanlan
Guiyue Road, Longhua District, Shenzhen

Product description

Product name Gateway

Trademark



Model Name G1-E

Family Model N/A

Standards ETSI EN 300 328 V2.2.2 (2019-07)

This device described above has been tested by Shenzhen NTEK, and the test results show that the equipment under test (EUT) is in compliance with the 2014/53/EU RED Directive Art.3.2 requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests : 06 Jan. 2022 ~ 18 Feb. 2022

Date of Issue : 05 Aug. 2022

Test Result : **Pass**

*Note: All test data of this report are based on the original test report
S22010602903001, dated by 18 Feb. 2022*

Testing Engineer :

(Mary Hu)

Authorized Signatory :

(Alex Li)

Table of Contents

Page

1 . GENERAL INFORMATION	9
1.1 GENERAL DESCRIPTION OF EUT	9
1.2 INFORMATION ABOUT THE EUT	10
1.3 TEST CONDITIONS AND CHANNEL	15
1.4 DESCRIPTION OF TEST CONDITIONS	16
1.5 DESCRIPTION OF SUPPORT UNITS	17
1.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	18
2 . SUMMARY OF TEST RESULTS	19
2.1 TEST FACILITY	20
2.2 MEASUREMENT UNCERTAINTY	20
3 . TEST PROCEDURES AND RESUTLS	21
3.1 EQUIVALENT ISOTROPIC RADIATED POWER	21
3.1.1 LIMITS OF EQUIVALENT ISOTROPIC RADIATED POWER	21
3.1.2 TEST PROCEDURE	21
3.1.3 TEST SETUP	21
3.1.4 TEST RESULTS	22
3.2 . PEAK POWER DENSITY	23
3.2.1 LIMITS OF POWER SPECTRAL DENSITY	23
3.2.2 TEST PROCEDURE	23
3.2.3 TEST SETUP	23
3.2.4 TEST RESULTS	24
3.3 . OCCUPIED CHANNEL BANDWIDTH	25
3.3.1 LIMITS OF OCCUPIED CHANNEL BANDWIDTH	25
3.3.2 TEST PROCEDURE	25
3.3.3 DEVIATION FROM TEST STANDARD	25
3.3.4 TEST SETUP	25
3.3.5 TEST RESULTS	26
3.4 . TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	27
3.4.1 LIMITS OF TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	27
3.4.2 TEST PROCEDURE	27
3.4.3 DEVIATION FROM TEST STANDARD	27
3.4.4 TEST SETUP	28
3.4.5 TEST RESULTS	29
3.5 . ADAPTIVE (CHANNEL ACCESS MECHANISM)	30
3.5.1 APPLICABILITY OF ADAPTIVE REQUIREMENTS AND LILIT FOR WIDE BAND MODULATION TECHNIQUES	30
3.5.2 TEST PROCEDURE	31

Table of Contents

Page

3.5.3 TEST SETUP CONFIGURATION	31
3.5.4 LIST OF MEASUREMENTS	32
3.5.5 TEST RESULTS	33
3.6 . TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	34
3.6.1 LIMITS OF TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	34
3.6.2 TEST PROCEDURE	34
3.6.3 DEVIATION FROM TEST STANDARD	34
3.6.4 TEST SETUP	35
3.6.5 TEST RESULTS(Radiated measurement)	36
3.6.6 TEST RESULTS (Conducted measurement)	47
3.7 . RECEIVER SPURIOUS RADIATION	48
3.7.1 LIMITS OF RECEIVER SPURIOUS RADIATION	48
3.7.2 TEST PROCEDURE	48
3.7.3 DEVIATION FROM TEST STANDARD	48
3.7.1 TEST SETUP	49
3.7.2 TEST RESULTS(Radiated measurement)	50
3.7.6 TEST RESULTS (Conducted measurement)	61
3.8 . RECEIVER BLOCKING	62
3.8.1 PERFORMANCE CRITERIA	62
3.8.2 LIMITS OF RECEIVER BLOCKING	62
3.8.3 TEST PROCEDURE	64
3.8.4 DEVIATION FROM TEST STANDARD	64
3.8.5 TEST SETUP	64
3.8.6 TEST RESULTS	65
4 . TEST RESULTS	77
Module 1	77
1M	77
4.1 RF Output Power	77
4.2 Power Spectral Density	79
4.3 Occupied Channel Bandwidth	81
4.4 Transmitter unwanted emissions in the out-of-band domain	83
4.5 Transmitter unwanted emissions in the spurious domain	84
4.6 Receiver spurious emissions	86
Module 1	88
2M	88
4.7 RF Output Power	88
4.8 Power Spectral Density	90
4.9 Occupied Channel Bandwidth	92

Table of Contents

Page

4.10 Transmitter unwanted emissions in the out-of-band domain	94
4.11 Transmitter unwanted emissions in the spurious domain	95
4.12 Receiver spurious emissions	97
Module 2	99
1M	99
4.1 RF Output Power	99
4.2 Power Spectral Density	101
4.3 Occupied Channel Bandwidth	103
4.4 Transmitter unwanted emissions in the out-of-band domain	105
4.5 Transmitter unwanted emissions in the spurious domain	106
4.6 Receiver spurious emissions	108
Module 2	110
2M	110
4.7 RF Output Power	110
4.8 Power Spectral Density	112
4.9 Occupied Channel Bandwidth	114
4.10 Transmitter unwanted emissions in the out-of-band domain	116
4.11 Transmitter unwanted emissions in the spurious domain	117
4.12 Receiver spurious emissions	119
Module 3	121
1M	121
4.1 RF Output Power	121
4.2 Power Spectral Density	123
4.3 Occupied Channel Bandwidth	125
4.4 Transmitter unwanted emissions in the out-of-band domain	127
4.5 Transmitter unwanted emissions in the spurious domain	128
4.6 Receiver spurious emissions	130
Module 3	132
2M	132
4.7 RF Output Power	132
4.8 Power Spectral Density	134
4.9 Occupied Channel Bandwidth	136
4.10 Transmitter unwanted emissions in the out-of-band domain	138
4.11 Transmitter unwanted emissions in the spurious domain	139

Table of Contents

Page

4.12 Receiver spurious emissions	141
Module 4	143
1M	143
4.1 RF Output Power	143
4.2 Power Spectral Density	145
4.3 Occupied Channel Bandwidth	147
4.4 Transmitter unwanted emissions in the out-of-band domain	149
4.5 Transmitter unwanted emissions in the spurious domain	150
4.6 Receiver spurious emissions	152
Module 4	154
2M	154
4.7 RF Output Power	154
4.8 Power Spectral Density	156
4.9 Occupied Channel Bandwidth	158
4.10 Transmitter unwanted emissions in the out-of-band domain	160
4.11 Transmitter unwanted emissions in the spurious domain	161
4.12 Receiver spurious emissions	163
Module 5	165
1M	165
4.1 RF Output Power	165
4.2 Power Spectral Density	167
4.3 Occupied Channel Bandwidth	169
4.4 Transmitter unwanted emissions in the out-of-band domain	171
4.5 Transmitter unwanted emissions in the spurious domain	172
4.6 Receiver spurious emissions	174
Module 5	176
2M	176
4.8 Power Spectral Density	178
4.9 Occupied Channel Bandwidth	180
4.10 Transmitter unwanted emissions in the out-of-band domain	182
4.11 Transmitter unwanted emissions in the spurious domain	183
4.12 Receiver spurious emissions	185
Module 6	187
1M	187

Table of Contents

Page




4.1 RF Output Power	187
4.2 Power Spectral Density	189
4.3 Occupied Channel Bandwidth	191
4.4 Transmitter unwanted emissions in the out-of-band domain	193
4.5 Transmitter unwanted emissions in the spurious domain	194
4.6 Receiver spurious emissions	196
Module 6	198
2M	198
4.7 RF Output Power	198
4.8 Power Spectral Density	200
4.9 Occupied Channel Bandwidth	202
4.10 Transmitter unwanted emissions in the out-of-band domain	204
4.11 Transmitter unwanted emissions in the spurious domain	205
4.12 Receiver spurious emissions	207
5 . EUT TEST PHOTO	209
SPURIOUS EMISSIONS MEASUREMENT PHOTOS	209

Revision History

Report No.	Version	Description	Issued Date
S22010602903001	Rev.01	Initial issue of report	18 Feb. 2022
S22080401505001	Rev.02	Update the product name	05 Aug.2022

1. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

Equipment	Gateway																
Trade Mark	  																
Model Name.	G1-E																
Family Model	N/A																
Model Difference	N/A																
Product Description	<table><tr><td colspan="2">The EUT is Gateway</td></tr><tr><td>Operation Frequency:</td><td>2402~2480 MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK</td></tr><tr><td>Adaptive/non-adaptive</td><td>Adaptive equipment</td></tr><tr><td>Receiver categories</td><td>2</td></tr><tr><td>Number Of Channel</td><td>Please see Note 2.</td></tr><tr><td>Antenna Designation:</td><td>FPC Antenna</td></tr><tr><td>Antenna Gain(Peak)</td><td>5 dBi</td></tr></table>	The EUT is Gateway		Operation Frequency:	2402~2480 MHz	Modulation Type:	GFSK	Adaptive/non-adaptive	Adaptive equipment	Receiver categories	2	Number Of Channel	Please see Note 2.	Antenna Designation:	FPC Antenna	Antenna Gain(Peak)	5 dBi
The EUT is Gateway																	
Operation Frequency:	2402~2480 MHz																
Modulation Type:	GFSK																
Adaptive/non-adaptive	Adaptive equipment																
Receiver categories	2																
Number Of Channel	Please see Note 2.																
Antenna Designation:	FPC Antenna																
Antenna Gain(Peak)	5 dBi																
Channel List	Refer to below																
Adapter	N/A																
Battery type&specification	N/A																
Rating	DC 5V from USB port, or DC 48V DC 0.1A POE port																
I/O Ports	Refer to users manual																
Hardware Version	N/A																
Software Version	N/A																

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel	Frequency (MHz)
00	2402
01	2404
.....
.....
38	2478
39	2480

1.2 INFORMATION ABOUT THE EUT

a) The type of modulation used by the equipment:

- ☐ FHSS
- ☒ other forms of modulation

b) In case of FHSS modulation:

- In case of non-Adaptive Frequency Hopping equipment:

The number of Hopping Frequencies:

- In case of Adaptive Frequency Hopping Equipment:

The maximum number of Hopping Frequencies:

The minimum number of Hopping Frequencies:

- The (average) Dwell Time:

c) Adaptive / non-adaptive equipment:

- ☐ non-adaptive Equipment
- ☒ adaptive Equipment without the possibility to switch to a non-adaptive mode
- ☐ adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

The maximum Channel Occupancy Time implemented by the equipment: ./ ms

- ☒ The equipment has implemented an LBT based DAA mechanism

- In case of equipment using modulation different from FHSS:

- ☐ The equipment is Frame Based equipment
- ☒ The equipment is Load Based equipment
- ☐ The equipment can switch dynamically between Frame Based and Load Based equipment

The CCA time implemented by the equipment: / μ s

- ☐ The equipment has implemented a non-LBT based DAA mechanism
- ☐ The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

The maximum RF Output Power (e.i.r.p.):

The maximum (corresponding) Duty Cycle:

Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

f) The worst case operational mode for each of the following tests:

- RF Output Power
GFSK
- Power Spectral Density
GFSK
- Duty cycle, Tx-Sequence, Tx-gap
N/A
- Accumulated Transmit time, Frequency Occupation & Hopping Sequence (only for FHSS equipment)
N/A
- Hopping Frequency Separation (only for FHSS equipment)
N/A
- Medium Utilization
N/A
- Adaptivity
N/A
- Receiver Blocking
GFSK
- Nominal Channel Bandwidth
GFSK
- Transmitter unwanted emissions in the OOB domain
GFSK
- Transmitter unwanted emissions in the spurious domain
GFSK
- Receiver spurious emissions
GFSK

g) The different transmit operating modes (tick all that apply):

- ☒ Operating mode 1: Single Antenna Equipment
 - ☒ Equipment with only one antenna
 - ☐ Equipment with two diversity antennas but only one antenna active at any moment in time
 - ☐ Smart Antenna Systems with two or more antennas, but operating in a (legacy) mode where only one antenna is used (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)
- ☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
 - ☐ Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)

- ☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1
- ☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2

NOTE 1: Add more lines if more channel bandwidths are supported.

- ☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
- ☐ Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)
- ☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1
- ☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2
- NOTE 2: Add more lines if more channel bandwidths are supported.

h) In case of Smart Antenna Systems:

- The number of Receive chains:
- The number of Transmit chains:
 - ☐ symmetrical power distribution
 - ☐ asymmetrical power distribution

In case of beam forming, the maximum (additional) beam forming gain: dB

NOTE: The additional beam forming gain does not include the basic gain of a single antenna.

i) Operating Frequency Range(s) of the equipment:

- Operating Frequency Range 1: 2402 MHz to 2480 MHz (1M)
 - Operating Frequency Range 2: 2402 MHz to 2480 MHz (2M)
- NOTE: Add more lines if more Frequency Ranges are supported.

j) Nominal Channel Bandwidth(s):

- Nominal Channel Bandwidth 1: Module 1: 1.031MHz (1M); Module 2: 1.027MHz (1M)
- Nominal Channel Bandwidth 2: Module 1: 2.05MHz (2M); Module 2: 2.086MHz (2M)
- Nominal Channel Bandwidth 1: Module 3: 1.025MHz (1M); Module 4: 1.029MHz (1M)
- Nominal Channel Bandwidth 2: Module 3: 2.058MHz (2M); Module 4: 2.102MHz (2M)
- Nominal Channel Bandwidth 1: Module 5: 1.031MHz (1M); Module 6: 1.025MHz (1M)
- Nominal Channel Bandwidth 2: Module 5: 2.074MHz (2M); Module 6: 2.05MHz (2M)

NOTE: Add more lines if more channel bandwidths are supported.

k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):

- ☒ Stand-alone
- ☐ Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)
- ☐ Plug-in radio device (Equipment intended for a variety of host systems)
- ☐ Other

l) The normal and the extreme operating conditions that apply to the equipment:

Normal operating conditions (if applicable):

Operating temperature: 15°C~35°C

Other (please specify if applicable):

Extreme operating conditions:

Operating temperature range: Minimum: 0°C Maximum 50°C

Other (please specify if applicable): Minimum: Maximum

Details provided are for the:

- ☒ stand-alone equipment
☐ combined (or host) equipment
☐ test jig

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p. levels:

• Antenna Type: FPC Antenna

- ☒ Integral Antenna (information to be provided in case of conducted measurements)

Antenna Gain: 5 dBi

If applicable, additional beamforming gain (excluding basic antenna gain): dB

- ☐ Temporary RF connector provided
☐ No temporary RF connector provided

- ☐ Dedicated Antennas (equipment with antenna connector)

- ☐ Single power level with corresponding antenna(s)
☐ Multiple power settings and corresponding antenna(s)

Number of different Power Levels:

Power Level 1: dBm

Power Level 2: dBm

Power Level 3: dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

• For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains

(G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable

Power Level 1: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1M Module 1	5	6.77	
2M Module 1	5	6.72	
1M Module 2	5	4.24	
2M Module 2	5	4.28	
1M Module 3	5	6.39	
2M Module 3	5	6.32	
1M Module 4	5	7.33	
2M Module 4	5	6.06	
1M Module 5	5	6.74	
2M Module 5	5	6.81	
1M Module 6	5	6.77	
2M Module 6	5	6.9	

NOTE 3: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 2: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			

NOTE 4: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 3: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			

NOTE 5: Add more rows in case more antenna assemblies are supported for this power level.

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the:

- ☒ stand-alone equipment
☐ combined (or host) equipment
☐ test jig

Supply Voltage ☐ AC mains State AC voltage V

☒ DC State DC voltage: DC 5V

In case of DC, indicate the type of power source

- ☐ Internal Power Supply
☐ External Power Supply or AC/DC adapter:
☐ Battery:
☐ Other:

o) Describe the test modes available which can facilitate testing:

See section 1.3

p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], IEEE 802.15.4™ [i.4], proprietary, etc.):

Bluetooth®

q) If applicable, the statistical analysis referred to in clause 5.4.1 q)

(to be provided as separate attachment)

r) If applicable, the statistical analysis referred to in clause 5.4.1 r)

(to be provided as separate attachment)

s) Geo-location capability supported by the equipment:

- ☐ Yes
☐ The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user

☒ No

t) Describe the minimum performance criteria that apply to the equipment (see clause 4.3.1.12.3 or clause 4.3.2.11.3):

The minimum performance criterion shall be a PER less than or equal to 10 %.

PER has been monitored is 0.82%.(1M) Module 1; 0.93%.(1M) Module 2

PER has been monitored is 0.91%.(2M) Module 1; 0.73%.(2M) Module 2

PER has been monitored is 0.77%.(1M) Module 3; 0.94%.(1M) Module 4

PER has been monitored is 0.94%.(2M) Module 3; 0.95%.(2M) Module 4

PER has been monitored is 0.84%.(1M) Module 5; 0.91%.(1M) Module 6

PER has been monitored is 0.97%.(2M) Module 5; 0.96%.(2M) Module 6

1.3 TEST CONDITIONS AND CHANNEL

	Normal Test Conditions	Extreme Test Conditions
Temperature	15°C - 35°C	40°C ~ -10°C Note: (1)
Relative Humidity	20% - 75%	N/A
Supply Voltage	DC 5V	/

Test Channel	EUT Channel	Test Frequency (MHz)
Lowest	CH00	2402
Middle	CH19	2440
Highest	CH39	2480

Note:

(1) The HT 40°C and LT -10°C was declared by manufacturer, The EUT couldn't be operate normally with higher or lower temperature.




(2) The measurements are performed at the highest, middle, lowest available channels.

1.4 DESCRIPTION OF TEST CONDITIONS

E-1
EUT

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Gateway	  	G1-E	N/A	EUT

Item	Type	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

1.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

EQUIPMENT TYPE	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
EMI Test Receiver	R&S	ESPI7	101318	2021.04.27	2022.04.26	1 year
Bilog Antenna	TESEQ	CBL6111D	31216	2021.03.29	2022.03.28	1 year
Turn Table	EM	SC100_1	60531	N/A	N/A	N/A
Antenna Mast	EM	SC100	N/A	N/A	N/A	N/A
Horn Antenna	EM	EM-AH-10180	2011071402	2021.03.29	2022.03.28	1 year
Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2021.04.27	2022.04.26	1 year
Test Cable (30MHz-1GHz)	N/A	R-01	N/A	2020.04.07	2023.04.06	3 year
Test Cable (1-18GHz)	N/A	R-02	N/A	2020.04.07	2023.04.06	3 year
50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.04.07	2023.04.06	3 year
Pre-Amplifier	EMC	EMC051835S E	980246	2021.04.27	2022.04.26	1 year
Spectrum Analyzer	Agilent	E4407B	MY45108040	2021.04.27	2022.04.26	1 year
Filter	TRILTHIC	2400MHz	29	2020.04.07	2023.04.06	3 year
Attenuator	Weinschel	33-10-33	AR4010	2020.04.07	2023.04.06	3 year
Attenuator	Weinschel	24-20-34	BP4485	2020.04.07	2023.04.06	3 year
MXA Signal Analyzer	Agilent	N9020A	MY49100060	2021.04.27	2022.04.26	1 year
ESG VETCTOR SIGNAL GENERATOR	Agilent	E4438C	MY45093347	2021.04.27	2022.04.26	1 year
PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2021.04.27	2022.04.26	1 year
Power Splitter	Mini-Circuits/USA	ZN2PD-63-S+	SF025101428	2020.04.07	2023.04.06	3 year
Coupler	Mini-Circuits	ZADC-10-63-S+	SF794101410	2020.04.07	2023.04.06	3 year
Directional Coupler	MCLI/USA	CB11-20	0D2L51502	2020.04.07	2023.04.06	3 year
Attenuator	Agilent	8495B	MY42147029	2020.04.13	2023.04.12	3 year
Power Meter	DARE	RPR3006W	15I00041SNO 84	2021.04.27	2022.04.26	1 year
MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2021.04.27	2022.04.26	1 year
Wideband Radio Communication Tester Specifications	R&S	CMW500	148500	2021.04.27	2022.04.26	1 year
temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test And this temporary antenna connector is listed within the instrument list

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

ETSI EN 300 328 V2.2.2 (2019-07)		
Clause	Test Item	Results
TRANSMITTER PARAMETERS		
4.3.2.2	RF Output Power	Pass
4.3.2.3	Power Spectral Density	Pass
4.3.2.4	Duty cycle, Tx-Sequence, Tx-gap	Not Applicable (See Note 1/2)
4.3.2.5	Medium Utilization (MU) factor	Not Applicable (See Note 1/2)
4.3.2.6	Adaptivity	Not Applicable (See Note 1)
4.3.2.7	Occupied Channel Bandwidth	Pass
4.3.2.8	Transmitter unwanted emission in the OOB domain	Pass
4.3.2.9	Transmitter unwanted emissions in the spurious domain	Pass
RECEIVER PARAMETERS		
4.3.2.10	Receiver Spurious Emissions	Pass
4.3.2.11	Receiver Blocking	Pass

Note:

- These requirements do not apply for equipment with a maximum declared RF output power of less than 10 dBm EIRP or for equipment when operating in a mode where the RF output power is less than 10 dBm EIRP.
- These requirements apply to non-adaptive frequency hopping equipment or to adaptive frequency hopping equipment operating in a non-adaptive mode
- The antenna gain provided by customer is used to calculate the EIRP result. NTEK is not responsible for the accuracy of antenna gain parameter.

2.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China

FCC Registered No.: 463705 IC Registered No.:9270A-1

CNAS Registration No.:L5516

2.2 MEASUREMENT UNCERTAINTY

For the test methods, according to ETSI EN 300 328 standard, the measurement uncertainty figures shall be calculated in accordance with ETR 100 028-1[4] and shall correspond to an expansion factor(coverage factor) $k=1.96$ or $k=2$ (which provide confidence levels of respectively **95 %** and **95.45 %** in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Measurement uncertainty

No.	Item	Uncertainty (P=95)
1	Occupied Channel Bandwidth	$\pm 4.7\%$
2	RF output Power,conducted	$\pm 0.9\text{dB}$
3	Power Spectral Density, conducted	$\pm 2.6\text{dB}$
4	Unwanted emissions, conducted	$\pm 2.2\text{dB}$
5	All emissions,radiated	$\pm 5.3\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2.0\%$
8	Time	$\pm 1.0\%$

3. TEST PROCEDURES AND RESULTS

3.1 EQUIVALENT ISOTROPIC RADIATED POWER

3.1.1 LIMITS OF EQUIVALENT ISOTROPIC RADIATED POWER

Refer to chapter 4.3.2.2.3 of ETSI EN 300 328 V2.2.2 (2019-07)


RF OUTPUT POWER	
Condition	Limit
<input type="checkbox"/> Non-adaptive wide band modulations systems	Equal to or less than the value declared by the supplier. This declared value shall be equal to or less than 20 dBm.
<input checked="" type="checkbox"/> Adaptive wide band modulations systems	≤20dBm

3.1.2 TEST PROCEDURE

Refer to chapter 5.4.2.2 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

3.1.3 TEST SETUP

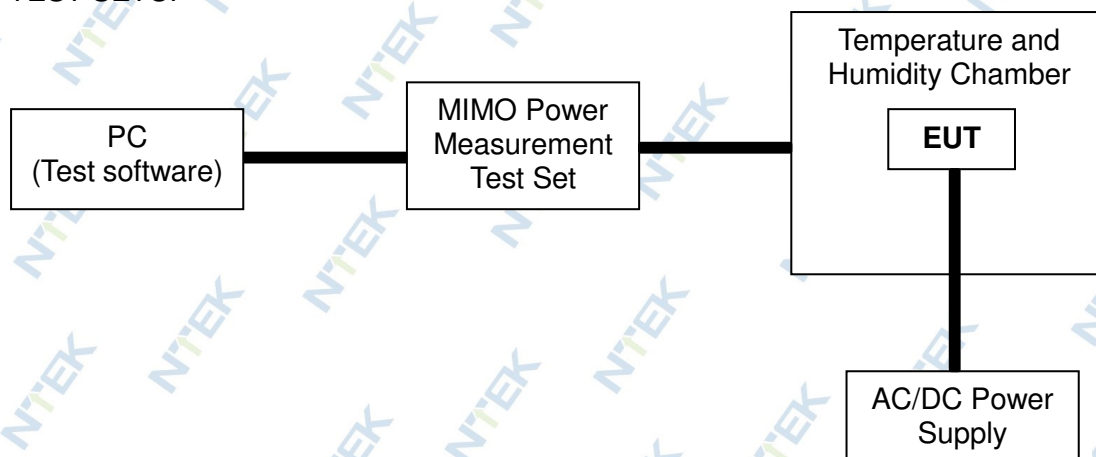

3.1.4 TEST RESULTS

EUT :	Gateway	Model Name :	G1-E
Temperature :	20℃	Relative Humidity:	55 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX Low channel / Middle Channel / High Channel		

Test data reference attachment

3.2. PEAK POWER DENSITY

3.2.1 LIMITS OF POWER SPECTRAL DENSITY

Refer to chapter 4.3.2.3.3 of ETSI EN 300 328 V2.2.2 (2019-07)

RF OUTPUT POWER	
Condition	Limit
For equipment using wide band modulations other than FHSS	≤ 10 dBm/MHz

3.2.2 TEST PROCEDURE


Refer to chapter 5.4.3.2 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

The setting of the Spectrum Analyzer

Start Frequency	2400MHz
Stop Frequency	2483.5MHz
Detector	RMS
Sweep Point	> 8 350; for spectrum analysers not supporting this number of sweep points, the frequency band may be segmented
Sweep time:	For non-continuous transmissions: $2 \times$ Channel Occupancy Time \times number of sweep points For continuous transmissions: 10 s; the sweep time may be increased further until a value where the sweep time has no further impact anymore on the RMS value of the signal.
RBW / VBW	10KHz / 30KHz

3.2.3 TEST SETUP



3.2.4 TEST RESULTS

EUT :	Gateway	Model Name :	G1-E
Temperature :	20℃	Relative Humidity:	55 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX-GFSK(CH00/CH19/CH39)		

Test data reference attachment

3.3. OCCUPIED CHANNEL BANDWIDTH

3.3.1 LIMITS OF OCCUPIED CHANNEL BANDWIDTH

Refer to chapter 4.3.2.7.3 of ETSI EN 300 328 V2.2.2 (2019-07)

OCCUPIED CHANNEL BANDWIDTH		
Condition		Limit
All types of equipment using wide band modulations other than FHSS		Shall fall completely within the band 2400 to 2483.5 MHz
Additional requirement	For non-adaptive using wide band modulations other than FHSS system and E.I.R.P >10 dBm	Less than 20 MHz
	For non-adaptive frequency hopping system and E.I.R.P >10 dBm	Less than 5 MHz

3.3.2 TEST PROCEDURE

Refer to chapter 5.4.7.2 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

The setting of the Spectrum Analyzer

Center Frequency	The centre frequency of the channel under test
Frequency Span	2 × Nominal Channel Bandwidth
Detector	RMS
RBW	~ 1 % of the span without going below 1 %
VBW	3 × RBW
Trace	Max hold
Sweep time	1s

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP



These measurements only were performed at normal test conditions. The measurement shall be performed only on the lowest and the highest frequency within the ststed frequency range. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator. Controlling software has been activated to set the EUT on specific status.

3.3.5 TEST RESULTS

EUT :	Gateway	Model Name :	G1-E
Temperature :	20℃	Relative Humidity:	55 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX-GFSK(CH00/CH39)		


Test data reference attachment

3.4. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

3.4.1 LIMITS OF TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

Refer to chapter 4.3.2.8.3 of ETSI EN 300 328 V2.2.2 (2019-07)

TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	
Condition	Limit
Under all test conditions	The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in below figure.

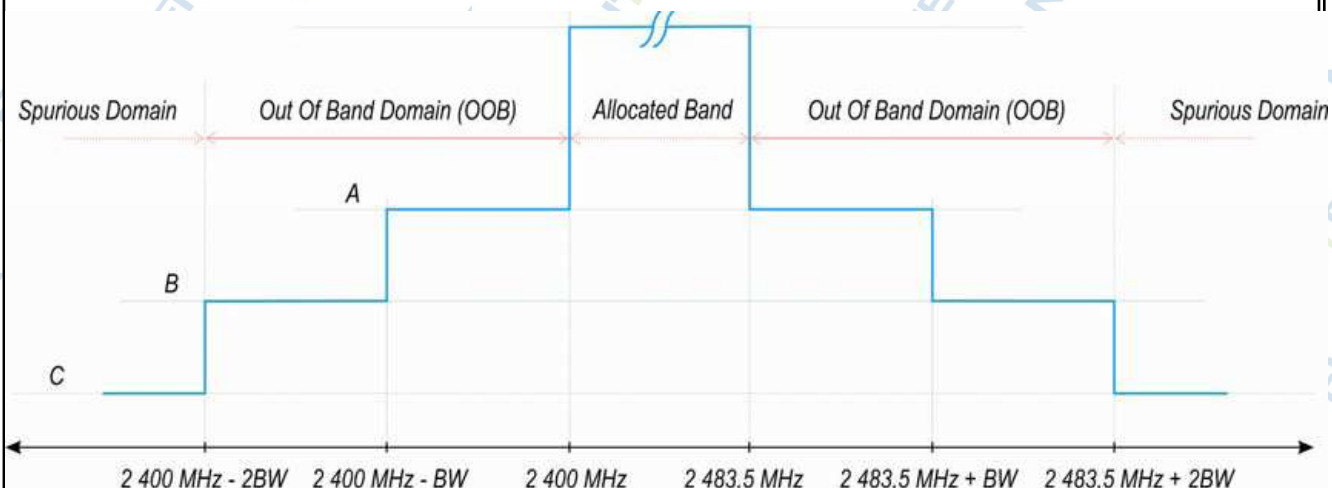

A: -10 dBm/MHz e.i.r.p.

B: -20 dBm/MHz e.i.r.p.

C: Spurious Domain limits

BW = Occupied Channel Bandwidth in MHz or 1 MHz whichever is greater

3.4.2 TEST PROCEDURE

Refer to chapter 5.4.8.2 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement


The setting of the Spectrum Analyzer

Span	0Hz
Filter Mode	Channel Filter
Trace Mode	Max Hold
Trigger Mode	Video trigger; in case video triggering is not possible, an external trigger source may be used
Detector	RMS
Sweep Point / Sweep Mode	Sweep Time [s] / (1 μ s) or 5 000 whichever is greater/ Continuous
RBW / VBW	1MHz / 3MHz

3.4.3 DEVIATION FROM TEST STANDARD

No deviation

3.4.4 TEST SETUP

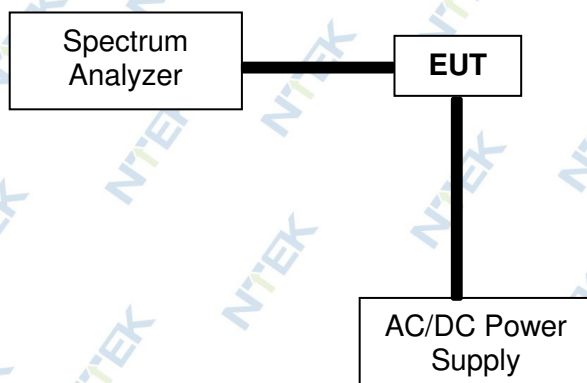

According to the EN 300328 V2.2.2 clause 5.4.8.1: These measurements shall only be performed at normal test conditions. For equipment using FHSS modulation, the measurements shall be performed during normal operation (hopping).

For equipment using wide band modulations other than FHSS, the measurement shall be performed at the lowest and the highest channel on which the equipment can operate. These operating channels shall be recorded.

The equipment shall be configured to operate under its worst case situation with respect to output power.

If the equipment can operate with different Nominal Channel Bandwidths (e.g. 20 MHz and 40 MHz), then each channel bandwidth shall be tested separately.

3.4.5 TEST RESULTS

EUT :	Gateway	Model Name :	G1-E
Temperature :	20℃	Relative Humidity:	55 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX-GFSK(CH00/CH39)		

Test data reference attachment

3.5. ADAPTIVE (CHANNEL ACCESS MECHANISM)

3.5.1 APPLICABILITY OF ADAPTIVE REQUIREMENTS AND LILT FOR WIDE BAND MODULATION TECHNIQUES

Refer to chapter 4.3.2.6 of ETSI EN 300 328 V2.2.2 (2019-07)

Requirement	Operational Mode			
	<input type="checkbox"/> Non-LBT based Detect and Avoid	<input type="checkbox"/> LBT based Detect and Avoid		
		<input type="checkbox"/> Frame Based Equipment	<input type="checkbox"/> Load Based Equipment (CCA using 'energy detect')	<input type="checkbox"/> Load Based Equipment (CCA not using any of the mechanisms referenced as note 2)
Minimum Clear Channel Assessment (CCA) Time	NA	not less than 18 us (see note 1)	(see note 2)	not less than 18 us (see note 1)
Maximum Channel Occupancy (COT) Time	<40 ms	1ms to 10 ms	(see note 2)	(13/32)*q ms (see note 3)
Minimum Idle Period	5 % minimum of 100 µs	5% of COT	(see note 2)	NA
Extended CCA check	NA	NA	(see note 2)	R*CCA (see note 4)
Short Control Signalling Transmissions	Maximum duty cycle of 10% within an observation period of 50 ms (see note 5)			

Note 1: The CCA time used by the equipment shall be declared by the supplier.

Note 2: Load Based Equipment may implement an LBT based spectrum sharing mechanism based on the Clear Channel Assessment (CCA) mode using energy detect as described in IEEE 802.11™-2012 [i.3], clause 9, clause 10, clause 16, clause 17, clause 19 and clause 20, or in IEEE 802.15.4™-2011 [i.4], clause 4, clause 5 and clause 8 providing the equipment complies with the conformance requirements referred to in clause 4.3.2.6.3.4.

Note 3: q is selected by the manufacturer in the range [4...32]

Note 4: The value of R shall be randomly selected in the range [1...q]

Note 5: Adaptive equipment may or may not have Short Control Signaling Transmissions.

Interference threshold level

The detection threshold shall be proportional to the transmit power of the transmitter: for a 20 dBm e.i.r.p. transmitter the detection threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G); however, beamforming gain (Y) shall not be taken into account. For power levels less than 20 dBm e.i.r.p., the detection threshold level may be relaxed to:

$$TL = -70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / P_{out}) \text{ (Pout in mW e.i.r.p.)}$$

Table 9: Unwanted Signal parameters

Wanted signal mean power from companion device (dBm)	Unwanted signal frequency (MHz)	Unwanted CW signal power (dBm)
-30/ sufficient to maintain the link(see note 2)	2 395 or 2 488,5 (see note 1)	-35 (see note 2)
<p>NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1.</p> <p>NOTE 2: A typical value which can be used in most cases is -50 dBm/MHz.</p> <p>NOTE 3: The level specified is the level in front of the UUT antenna. In case of conducted measurements, this level has to be corrected by the actual antenna assembly gain.</p>		


3.5.2 TEST PROCEDURE

Refer to chapter 5.4.6.2 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

Test method please refer to the 5.4.6.2.1.4 of ETSI EN 300 328 V2.2.2 (2019-07)

3.5.3 TEST SETUP CONFIGURATION

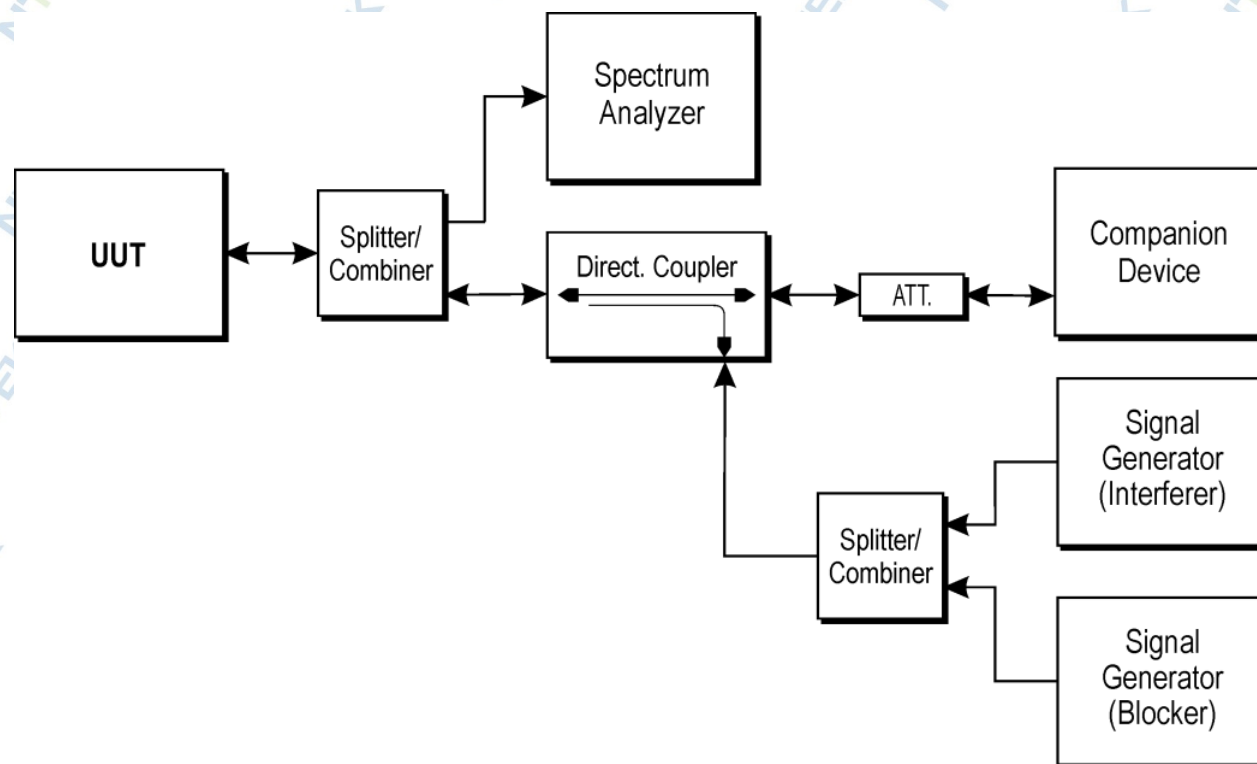

3.5.4 LIST OF MEASUREMENTS

UUT operational Mode		
Frame Based Equipment	Load Based Equipment (CCA using 'energy detect')	Load Based Equipment (CCA not using any of the mechanisms referenced)
	V	

Clause	Test Parameter	Remarks	PASS/FAIL
4.3.2.5.2.2.1	Adaptive (Frame Based Equipment)	Not Applicable	N/A
4.3.2.5.2.2.2	Adaptive (Load Based Equipment)	N/A	N/A
4.3.2.5.3	Short Control Signaling Transmissions	N/A	N/A

3.5.5 TEST RESULTS

EUT :	Gateway	Model Name :	G1-E
Temperature :	20℃	Relative Humidity:	55 %
Pressure :	1012 hPa	Test Voltage :	N/A
Test Mode :	N/A		

Note: Not applicable

3.6. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

3.6.1 LIMITS OF TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

Refer to chapter 4.3.2.9.3 of ETSI EN 300 328 V2.2.2 (2019-07)

TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN		
Frequency Range	Maximum Power Limit (E.R.P.(≤1 GHz) E.I.R.P.(> 1 GHz))	Bandwidth
30 MHz to 47 MHz	-36dBm	100 kHz
47 MHz to 74 MHz	-54dBm	100 kHz
74 MHz to 87.5 MHz	-36dBm	100 kHz
87.5 MHz to 118 MHz	-54dBm	100 kHz
118 MHz to 174 MHz	-36dBm	100 kHz
174 MHz to 230 MHz	-54dBm	100 kHz
230 MHz to 470 MHz	-36dBm	100 kHz
470 MHz to 694 MHz	-54dBm	100 kHz
694 MHz to 1 GHz	-36dBm	100 kHz
1 GHz ~ 12.75 GHz	-30dBm	1 MHz

3.6.2 TEST PROCEDURE

Refer to chapter 5.4.9.2 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input checked="" type="checkbox"/> Radiated measurement

The setting of the Spectrum Analyzer


RBW	100K(<1GHz) / 1M(>1GHz)
VBW	300K(<1GHz) / 3M(>1GHz)

3.6.3 DEVIATION FROM TEST STANDARD

No deviation

3.6.4 TEST SETUP

Radiated measurement:

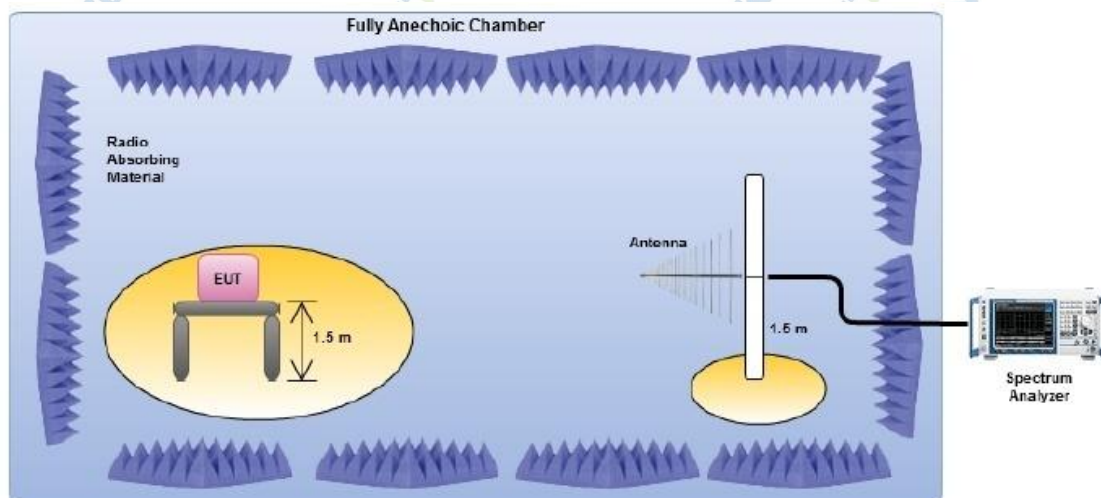

Conducted measurement:



1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).
2. The measurements were performed when normal hopping was disabled. In this case measurements were performed when operating at the lowest and the highest hopping frequency.
3. The equipment was configured to operate under its worst case situation with respect to output power.
4. The test setup has been constructed as the normal use condition. Controlling software has been activated to set the EUT on specific status.

3.6.5 TEST RESULTS(Radiated measurement)

Module 1

BELOW 1 GHz WORST- CASE DATA(30 MHz ~ 1GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX--GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	38.44	-75.15	10.77	-64.38	-36	-11.57	peak
V	103.26	-73.80	11.26	-62.54	-54	-16.13	peak
V	177.61	-70.85	11.22	-59.63	-54	-8.57	peak
V	248.23	-77.59	11.19	-66.40	-36	-12.83	peak
V	555.44	-77.80	9.53	-68.27	-54	-10.13	peak
V	721.11	-71.22	11.03	-60.19	-36	-12.57	peak
H	37.21	-77.41	10.45	-66.96	-36	-7.67	peak
H	103.03	-77.69	10.2	-67.49	-54	-5.07	peak
H	193.15	-72.34	10.83	-61.51	-54	-12.09	peak
H	356.93	-69.84	11.11	-58.73	-36	-11.07	peak
H	622.17	-75.41	11.11	-64.30	-36	-10.11	peak
H	772.90	-70.92	11.03	-59.89	-36	-10.05	peak

Remark:

1.Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.

2.All the modes had been tested, but only the worst data recorded in the report.

Module 1

ABOVE 1 GHz WORST- CASE DATA (1GHz ~ 12.75GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX-GFSK (CH00/ CH19/CH39)		

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
operation frequency:2402							
V	4804.28	-38.70	-1.47	-40.17	-30	-10.17	peak
V	7206.85	-51.80	11.09	-40.71	-30	-10.71	peak
H	4804.28	-38.80	-1.47	-40.27	-30	-10.27	peak
H	7206.85	-51.70	11.09	-40.61	-30	-10.61	peak
operation frequency:2440							
V	4880.65	-38.80	-1.86	-40.66	-30	-10.66	peak
V	7320.70	-51.10	5.26	-45.84	-30	-15.84	peak
H	4880.65	-37.80	-1.86	-39.66	-30	-9.66	peak
H	7320.70	-51.20	5.26	-45.94	-30	-15.94	peak
operation frequency:2480							
V	4961.57	-39.60	-1.28	-40.88	-30	-10.88	peak
V	7440.36	-51.30	8.79	-42.51	-30	-12.51	peak
H	4961.57	-39.20	-1.28	-40.48	-30	-10.48	peak
H	7440.36	-52.30	8.79	-43.51	-30	-13.51	peak

Remark:

1. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
2. All the modes had been tested, but only the worst data recorded in the report.

Module 2

BELOW 1 GHz WORST- CASE DATA(30 MHz ~ 1GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24°C	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX--GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	38.44	-75.15	10.77	-64.38	-36	-28.38	peak
V	103.26	-73.80	11.26	-62.54	-54	-8.54	peak
V	177.61	-70.85	11.22	-59.63	-54	-5.63	peak
V	248.23	-77.59	11.19	-66.40	-36	-30.40	peak
V	555.44	-77.80	9.53	-68.27	-54	-14.27	peak
V	721.11	-71.22	11.03	-60.19	-36	-24.19	peak
H	37.21	-77.41	10.45	-66.96	-36	-30.96	peak
H	103.03	-77.69	10.2	-67.49	-54	-13.49	peak
H	193.15	-72.34	10.83	-61.51	-54	-7.51	peak
H	356.93	-69.84	11.11	-58.73	-36	-22.73	peak
H	622.17	-75.41	11.11	-64.30	-36	-28.30	peak
H	772.90	-70.92	11.03	-59.89	-36	-23.89	peak

Remark:

- 1.Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
- 2.All the modes had been tested, but only the worst data recorded in the report.

Module 2

ABOVE 1 GHz WORST- CASE DATA (1GHz ~ 12.75GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24°C	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX-GFSK (CH00/ CH19/CH39)		

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
operation frequency:2402							
V	4804.50	-37.90	-1.47	-39.37	-30	-9.37	peak
V	7206.77	-51.50	11.09	-40.41	-30	-10.41	peak
H	4804.50	-37.80	-1.47	-39.27	-30	-9.27	peak
H	7206.77	-52.00	11.09	-40.91	-30	-10.91	peak
operation frequency:2440							
V	4880.79	-38.90	-1.86	-40.76	-30	-10.76	peak
V	7320.97	-50.60	5.26	-45.34	-30	-15.34	peak
H	4880.79	-37.20	-1.86	-39.06	-30	-9.06	peak
H	7320.97	-51.30	5.26	-46.04	-30	-16.04	peak
operation frequency:2480							
V	4860.03	-38.30	-1.28	-39.58	-30	-9.58	peak
V	7440.07	-50.60	8.79	-41.81	-30	-11.81	peak
H	4860.03	-38.60	-1.28	-39.88	-30	-9.88	peak
H	7440.07	-52.00	8.79	-43.21	-30	-13.21	peak

Remark:

1. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
2. All the modes had been tested, but only the worst data recorded in the report.

Module 3

BELOW 1 GHz WORST- CASE DATA(30 MHz ~ 1GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX--GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	40.27	-72.81	10.77	-62.48	-36	-26.48	peak
V	116.89	-67.15	11.26	-62.41	-54	-8.41	peak
V	206.40	-73.37	11.22	-60.02	-54	-6.02	peak
V	260.27	-72.70	11.19	-66.05	-36	-30.05	peak
V	644.76	-70.83	9.53	-62.14	-54	-8.14	peak
V	737.69	-73.65	11.03	-65.73	-36	-29.73	peak
H	35.94	-72.62	10.45	-57.66	-36	-21.66	peak
H	100.30	-71.83	10.2	-66.83	-54	-12.83	peak
H	210.17	-76.56	10.83	-62.75	-54	-8.75	peak
H	350.24	-77.81	11.11	-65.76	-36	-29.76	peak
H	583.71	-70.03	11.11	-62.12	-36	-26.12	peak
H	711.63	-68.79	11.03	-64.36	-36	-28.36	peak

Remark:

- 1.Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
- 2.All the modes had been tested, but only the worst data recorded in the report.

Module 3

ABOVE 1 GHz WORST- CASE DATA (1GHz ~ 12.75GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX-GFSK (CH00/ CH19/CH39)		

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
operation frequency:2402							
V	4804.22	-38.80	-1.47	-40.27	-30	-10.27	peak
V	7206.89	-51.10	11.09	-40.01	-30	-10.01	peak
H	4804.22	-38.40	-1.47	-39.87	-30	-9.87	peak
H	7206.89	-51.70	11.09	-40.61	-30	-10.61	peak
operation frequency:2440							
V	4880.48	-39.30	-1.86	-41.16	-30	-11.16	peak
V	7320.23	-50.60	5.26	-45.34	-30	-15.34	peak
H	4880.48	-39.60	-1.86	-41.46	-30	-11.46	peak
H	7320.23	-50.00	5.26	-44.74	-30	-14.74	peak
operation frequency:2480							
V	4860.50	-37.90	-1.28	-39.18	-30	-9.18	peak
V	7440.53	-51.10	8.79	-42.31	-30	-12.31	peak
H	4860.50	-39.20	-1.28	-40.48	-30	-10.48	peak
H	7440.53	-51.10	8.79	-42.31	-30	-12.31	peak

Remark:

1. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
2. All the modes had been tested, but only the worst data recorded in the report.

Module 4

BELOW 1 GHz WORST- CASE DATA(30 MHz ~ 1GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24°C	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX--GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	40.58	-77.92	10.77	-67.15	-36	-31.15	peak
V	96.80	-71.56	11.26	-60.30	-54	-6.30	peak
V	221.32	-77.92	11.22	-66.70	-54	-12.70	peak
V	444.77	-74.76	11.19	-63.57	-36	-27.57	peak
V	677.22	-75.40	9.53	-65.87	-54	-11.87	peak
V	736.52	-73.44	11.03	-62.41	-36	-26.41	peak
H	46.47	-76.81	10.45	-66.36	-36	-30.36	peak
H	111.90	-68.90	10.2	-58.70	-54	-4.70	peak
H	224.58	-72.35	10.83	-61.52	-54	-7.52	peak
H	236.53	-76.55	11.11	-65.44	-36	-29.44	peak
H	606.90	-67.66	11.11	-56.55	-36	-20.55	peak
H	766.19	-74.87	11.03	-63.84	-36	-27.84	peak

Remark:

- 1.Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
- 2.All the modes had been tested, but only the worst data recorded in the report.

Module 4

ABOVE 1 GHz WORST- CASE DATA (1GHz ~ 12.75GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX-GFSK (CH00/ CH19/CH39)		

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
operation frequency:2402							
V	4804.81	-37.10	-1.47	-38.57	-30	-8.57	peak
V	7206.37	-50.30	11.09	-39.21	-30	-9.21	peak
H	4804.81	-38.70	-1.47	-40.17	-30	-10.17	peak
H	7206.37	-51.40	11.09	-40.31	-30	-10.31	peak
operation frequency:2440							
V	4880.25	-38.40	-1.86	-40.26	-30	-10.26	peak
V	7320.93	-51.60	5.26	-46.34	-30	-16.34	peak
H	4880.25	-38.70	-1.86	-40.56	-30	-10.56	peak
H	7320.93	-50.80	5.26	-45.54	-30	-15.54	peak
operation frequency:2480							
V	4860.92	-39.20	-1.28	-40.48	-30	-10.48	peak
V	7440.13	-51.80	8.79	-43.01	-30	-13.01	peak
H	4860.92	-39.60	-1.28	-40.88	-30	-10.88	peak
H	7440.13	-52.90	8.79	-44.11	-30	-14.11	peak

Remark:

1. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
2. All the modes had been tested, but only the worst data recorded in the report.

Module 5

BELOW 1 GHz WORST- CASE DATA(30 MHz ~ 1GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX--GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	40.95	-76.66	10.77	-65.89	-36	-29.89	peak
V	99.97	-75.76	11.26	-64.50	-54	-10.50	peak
V	229.49	-72.19	11.22	-60.97	-54	-6.97	peak
V	280.51	-69.11	11.19	-57.92	-36	-21.92	peak
V	679.76	-75.34	9.53	-65.81	-54	-11.81	peak
V	740.84	-76.48	11.03	-65.45	-36	-29.45	peak
H	45.31	-71.44	10.45	-60.99	-36	-24.99	peak
H	94.51	-76.47	10.2	-66.27	-54	-12.27	peak
H	217.90	-67.97	10.83	-57.14	-54	-3.14	peak
H	408.79	-71.51	11.11	-60.40	-36	-24.40	peak
H	608.21	-77.13	11.11	-66.02	-36	-30.02	peak
H	732.94	-68.58	11.03	-57.55	-36	-21.55	peak

Remark:

- 1.Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
- 2.All the modes had been tested, but only the worst data recorded in the report.

Module 5

ABOVE 1 GHz WORST- CASE DATA (1GHz ~ 12.75GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX-GFSK (CH00/ CH19/CH39)		

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
operation frequency:2402							
V	4804.85	-38.60	-1.47	-40.07	-30	-10.07	peak
V	7206.95	-50.60	11.09	-39.51	-30	-9.51	peak
H	4804.85	-38.30	-1.47	-39.77	-30	-9.77	peak
H	7206.95	-50.90	11.09	-39.81	-30	-9.81	peak
operation frequency:2440							
V	4880.44	-39.10	-1.86	-40.96	-30	-10.96	peak
V	7320.46	-50.60	5.26	-45.34	-30	-15.34	peak
H	4880.44	-39.30	-1.86	-41.16	-30	-11.16	peak
H	7320.46	-51.90	5.26	-46.64	-30	-16.64	peak
operation frequency:2480							
V	4860.25	-37.90	-1.28	-39.18	-30	-9.18	peak
V	7440.69	-50.10	8.79	-41.31	-30	-11.31	peak
H	4860.25	-40.30	-1.28	-41.58	-30	-11.58	peak
H	7440.69	-51.70	8.79	-42.91	-30	-12.91	peak

Remark:

1. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
2. All the modes had been tested, but only the worst data recorded in the report.

Module 6

BELOW 1 GHz WORST- CASE DATA(30 MHz ~ 1GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX--GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	33.64	-74.24	10.77	-63.47	-36	-27.47	peak
V	103.67	-68.30	11.26	-57.04	-54	-3.04	peak
V	200.47	-69.57	11.22	-58.35	-54	-4.35	peak
V	450.87	-70.02	11.19	-58.83	-36	-22.83	peak
V	477.14	-70.51	9.53	-60.98	-54	-6.98	peak
V	740.32	-69.97	11.03	-58.94	-36	-22.94	peak
H	43.38	-74.43	10.45	-63.98	-36	-27.98	peak
H	106.65	-68.11	10.2	-57.91	-54	-3.91	peak
H	221.25	-76.45	10.83	-65.62	-54	-11.62	peak
H	286.59	-75.19	11.11	-64.08	-36	-28.08	peak
H	615.89	-67.29	11.11	-56.18	-36	-20.18	peak
H	715.36	-77.72	11.03	-66.69	-36	-30.69	peak

Remark:

- 1.Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
- 2.All the modes had been tested, but only the worst data recorded in the report.

Module 6

ABOVE 1 GHz WORST- CASE DATA (1GHz ~ 12.75GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	TX-GFSK (CH00/ CH19/CH39)		

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
(H/V)	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
operation frequency:2402							
V	4804.16	-39.50	-1.47	-40.97	-30	-10.97	peak
V	7206.05	-50.80	11.09	-39.71	-30	-9.71	peak
H	4804.16	-38.20	-1.47	-39.67	-30	-9.67	peak
H	7206.05	-51.20	11.09	-40.11	-30	-10.11	peak
operation frequency:2440							
V	4880.65	-39.60	-1.86	-41.46	-30	-11.46	peak
V	7320.44	-50.80	5.26	-45.54	-30	-15.54	peak
H	4880.65	-38.60	-1.86	-40.46	-30	-10.46	peak
H	7320.44	-50.80	5.26	-45.54	-30	-15.54	peak
operation frequency:2480							
V	4860.37	-39.70	-1.28	-40.98	-30	-10.98	peak
V	7440.74	-50.10	8.79	-41.31	-30	-11.31	peak
H	4860.37	-39.60	-1.28	-40.88	-30	-10.88	peak
H	7440.74	-51.50	8.79	-42.71	-30	-12.71	peak
Remark: 1. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit. 2. All the modes had been tested, but only the worst data recorded in the report.							

3.6.6 TEST RESULTS (Conducted measurement)

Test data reference attachment

3.7. RECEIVER SPURIOUS RADIATION

3.7.1 LIMITS OF RECEIVER SPURIOUS RADIATION

Refer to chapter 4.3.2.10.3 of ETSI EN 300 328 V2.2.2 (2019-07)

RECEIVER SPURIOUS EMISSIONS		
Frequency Range	Maximum Power Limit (E.R.P.(≤ 1 GHz) E.I.R.P.(> 1 GHz))	Measurement Bandwidth
30 MHz ~ 1 GHz	-57dBm	100KHz
1 GHz ~ 12.75 GHz	-47dBm	1MHz

3.7.2 TEST PROCEDURE

Refer to chapter 5.4.10.2 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input checked="" type="checkbox"/> Radiated measurement

The setting of the Spectrum Analyzer


RBW	100K(<1GHz) / 1M(>1GHz)
VBW	300K(<1GHz) / 3M(>1GHz)

3.7.3 DEVIATION FROM TEST STANDARD


No deviation

3.7.1 TEST SETUP

Radiated measurement:

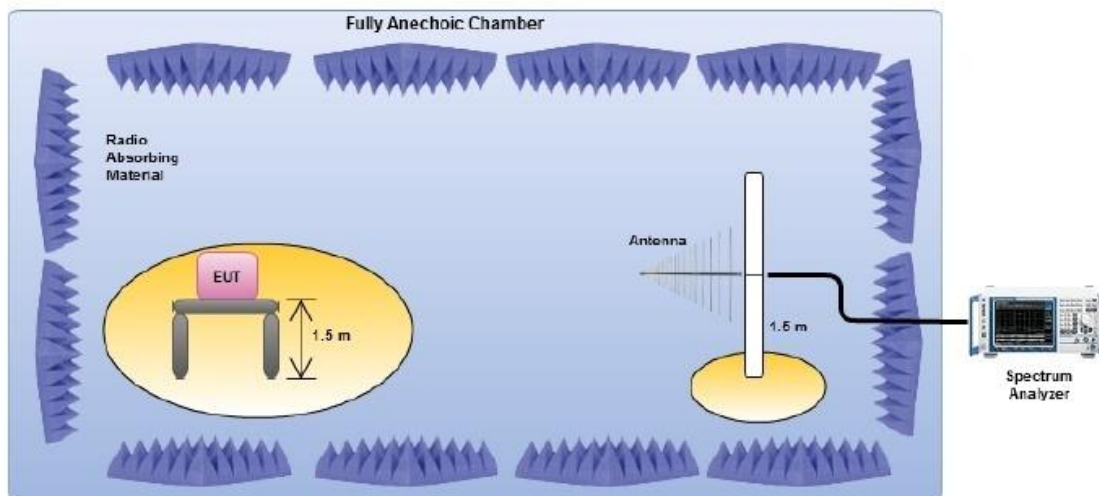

Conducted measurement:



1. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration).
2. Testing was performed when the equipment was in a receive-only mode.
3. The measurements were performed when normal hopping was disabled. In this case measurements were performed when operating at the lowest and the highest hopping frequency.
4. The test setup has been constructed as the normal use condition. Controlling software has been activated to set the EUT on specific status.

3.7.2 TEST RESULTS(Radiated measurement)

Module 1

RX BELOW 1 GHz WORST- CASE DATA(30 MHz ~ 1GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24°C	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode-GFSK(CH00)		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBm)	Factor (dB)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Remark
V	36.73	-81.55	12.98	-68.57	-57	-11.57	peak
V	92.03	-84.80	11.67	-73.13	-57	-16.13	peak
V	227.61	-84.51	18.94	-65.57	-57	-8.57	peak
V	286.49	-81.48	11.65	-69.83	-57	-12.83	peak
V	620.14	-78.58	11.45	-67.13	-57	-10.13	peak
V	721.26	-81.02	11.45	-69.57	-57	-12.57	peak
H	40.37	-83.27	18.6	-64.67	-57	-7.67	peak
H	103.06	-80.18	18.11	-62.07	-57	-5.07	peak
H	229.61	-79.39	10.3	-69.09	-57	-12.09	peak
H	258.97	-83.07	15	-68.07	-57	-11.07	peak
H	590.31	-81.74	14.63	-67.11	-57	-10.11	peak
H	716.86	-81.68	14.63	-67.05	-57	-10.05	peak

Remark:

1. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
2. All the modes had been tested, but only the worst data recorded in the report.

Module 1

RX ABOVE 1 GHz WORST- CASE DATA(1GHz ~ 12.75GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode-GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	1214.05	-81.34	9.94	-71.40	-47	-24.40	peak
V	2964.48	-78.17	9.82	-68.35	-47	-21.35	peak
V	3203.77	-84.15	10.02	-74.13	-47	-27.13	peak
V	4799.69	-79.44	16.13	-63.31	-47	-16.31	peak
V	4013.38	-78.84	16.16	-62.68	-47	-15.68	peak
V	4695.84	-81.80	16.19	-65.61	-47	-18.61	peak
H	2756.06	-81.13	10.11	-71.02	-47	-24.02	peak
H	2974.83	-84.80	10.68	-74.12	-47	-27.12	peak
H	3160.82	-80.03	10.21	-69.82	-47	-22.82	peak
H	3850.27	-77.30	11.23	-66.07	-47	-19.07	peak
H	4118.70	-84.93	8.60	-76.33	-47	-29.33	peak
H	5788.29	-79.32	14.56	-64.76	-47	-17.76	peak

1. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
2. All the modes had been tested, but only the worst data recorded in the report.

Module 2

RX BELOW 1 GHz WORST- CASE DATA(30 MHz ~ 1GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24°C	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode-GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	36.48	-78.59	12.98	-65.61	-57	-8.61	peak
V	94.91	-81.07	11.67	-69.40	-57	-12.40	peak
V	226.02	-83.38	18.94	-64.44	-57	-7.44	peak
V	319.23	-77.61	11.65	-65.96	-57	-8.96	peak
V	517.40	-78.92	11.45	-67.47	-57	-10.47	peak
V	736.55	-81.66	11.45	-70.21	-57	-13.21	peak
H	44.08	-83.97	18.6	-65.37	-57	-8.37	peak
H	92.84	-82.33	18.11	-64.22	-57	-7.22	peak
H	191.14	-84.11	10.3	-73.81	-57	-16.81	peak
H	265.34	-78.63	15	-63.63	-57	-6.63	peak
H	663.00	-84.67	14.63	-70.04	-57	-13.04	peak
H	749.64	-80.66	14.63	-66.03	-57	-9.03	peak

Remark:

3. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
4. All the modes had been tested, but only the worst data recorded in the report.

Module 2

RX ABOVE 1 GHz WORST- CASE DATA(1GHz ~ 12.75GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode-GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	1081.45	-79.25	9.94	-69.31	-47	-22.31	peak
V	2155.51	-84.61	9.82	-74.79	-47	-27.79	peak
V	3745.23	-80.58	10.02	-70.56	-47	-23.56	peak
V	4819.07	-78.68	16.13	-62.55	-47	-15.55	peak
V	4126.65	-84.55	16.16	-68.39	-47	-21.39	peak
V	4993.26	-84.94	16.19	-68.75	-47	-21.75	peak
H	2885.33	-82.04	10.11	-71.93	-47	-24.93	peak
H	2635.25	-81.96	10.68	-71.28	-47	-24.28	peak
H	3148.67	-83.41	10.21	-73.20	-47	-26.20	peak
H	3792.83	-82.64	11.23	-71.41	-47	-24.41	peak
H	4045.31	-79.26	8.60	-70.66	-47	-23.66	peak
H	5652.03	-77.81	14.56	-63.25	-47	-16.25	peak

3. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.

4. All the modes had been tested, but only the worst data recorded in the report.

Module 3

RX BELOW 1 GHz WORST- CASE DATA(30 MHz ~ 1GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode-GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	37.89	-82.73	12.98	-69.75	-57	-12.75	peak
V	112.32	-78.14	11.67	-66.47	-57	-9.47	peak
V	201.80	-78.92	18.94	-59.98	-57	-2.98	peak
V	242.73	-78.01	11.65	-66.36	-57	-9.36	peak
V	512.62	-82.12	11.45	-70.67	-57	-13.67	peak
V	706.60	-84.37	11.45	-72.92	-57	-15.92	peak
H	38.38	-83.52	18.6	-64.92	-57	-7.92	peak
H	112.41	-81.80	18.11	-63.69	-57	-6.69	peak
H	214.75	-77.02	10.3	-66.72	-57	-9.72	peak
H	422.02	-79.02	15	-64.02	-57	-7.02	peak
H	634.18	-79.15	14.63	-64.52	-57	-7.52	peak
H	694.52	-77.85	14.63	-63.22	-57	-6.22	peak

Remark:

5. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
6. All the modes had been tested, but only the worst data recorded in the report.

Module 3

RX ABOVE 1 GHz WORST- CASE DATA(1GHz ~ 12.75GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode-GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	1702.76	-78.94	9.94	-69.00	-47	-22.00	peak
V	2193.31	-84.94	9.82	-75.12	-47	-28.12	peak
V	3588.60	-84.79	10.02	-74.77	-47	-27.77	peak
V	4196.70	-77.12	16.13	-60.99	-47	-13.99	peak
V	4078.54	-84.10	16.16	-67.94	-47	-20.94	peak
V	4702.77	-82.23	16.19	-66.04	-47	-19.04	peak
H	2459.56	-81.07	10.11	-70.96	-47	-23.96	peak
H	2822.76	-82.19	10.68	-71.51	-47	-24.51	peak
H	3440.17	-84.50	10.21	-74.29	-47	-27.29	peak
H	3860.22	-83.63	11.23	-72.40	-47	-25.40	peak
H	4137.62	-83.55	8.60	-74.95	-47	-27.95	peak
H	5785.76	-81.25	14.56	-66.69	-47	-19.69	peak

5. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.

6. All the modes had been tested, but only the worst data recorded in the report.

Module 4

RX BELOW 1 GHz WORST- CASE DATA(30 MHz ~ 1GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode-GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	34.58	-80.76	12.98	-67.78	-57	-10.78	peak
V	112.35	-78.41	11.67	-66.74	-57	-9.74	peak
V	229.31	-82.20	18.94	-63.26	-57	-6.26	peak
V	256.02	-78.68	11.65	-67.03	-57	-10.03	peak
V	683.91	-80.08	11.45	-68.63	-57	-11.63	peak
V	718.26	-78.51	11.45	-67.06	-57	-10.06	peak
H	37.83	-80.68	18.6	-62.08	-57	-5.08	peak
H	89.30	-79.13	18.11	-61.02	-57	-4.02	peak
H	186.06	-83.77	10.3	-73.47	-57	-16.47	peak
H	288.69	-80.84	15	-65.84	-57	-8.84	peak
H	617.46	-82.34	14.63	-67.71	-57	-10.71	peak
H	742.29	-82.36	14.63	-67.73	-57	-10.73	peak

Remark:

7. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
8. All the modes had been tested, but only the worst data recorded in the report.

Module 4

RX ABOVE 1 GHz WORST- CASE DATA(1GHz ~ 12.75GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode-GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	1944.40	-77.54	9.94	-67.60	-47	-20.60	peak
V	2399.40	-77.56	9.82	-67.74	-47	-20.74	peak
V	3485.29	-79.47	10.02	-69.45	-47	-22.45	peak
V	4297.30	-79.26	16.13	-63.13	-47	-16.13	peak
V	4198.84	-79.62	16.16	-63.46	-47	-16.46	peak
V	4667.97	-84.06	16.19	-67.87	-47	-20.87	peak
H	2520.98	-84.28	10.11	-74.17	-47	-27.17	peak
H	2893.30	-78.15	10.68	-67.47	-47	-20.47	peak
H	3072.59	-77.70	10.21	-67.49	-47	-20.49	peak
H	3642.04	-79.18	11.23	-67.95	-47	-20.95	peak
H	4342.38	-78.73	8.60	-70.13	-47	-23.13	peak
H	5243.43	-84.42	14.56	-69.86	-47	-22.86	peak

7. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.

8. All the modes had been tested, but only the worst data recorded in the report.

Module 5

RX BELOW 1 GHz WORST- CASE DATA(30 MHz ~ 1GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode-GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	42.07	-78.17	12.98	-65.19	-57	-8.19	peak
V	93.78	-83.34	11.67	-71.67	-57	-14.67	peak
V	206.55	-80.36	18.94	-61.42	-57	-4.42	peak
V	437.19	-84.57	11.65	-72.92	-57	-15.92	peak
V	508.38	-84.73	11.45	-73.28	-57	-16.28	peak
V	734.60	-84.80	11.45	-73.35	-57	-16.35	peak
H	33.08	-77.91	18.6	-59.31	-57	-2.31	peak
H	97.27	-80.30	18.11	-62.19	-57	-5.19	peak
H	228.11	-84.99	10.3	-74.69	-57	-17.69	peak
H	461.65	-80.64	15	-65.64	-57	-8.64	peak
H	671.97	-78.99	14.63	-64.36	-57	-7.36	peak
H	714.08	-78.14	14.63	-63.51	-57	-6.51	peak

Remark:

9. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
10. All the modes had been tested, but only the worst data recorded in the report.

Module 5

RX ABOVE 1 GHz WORST- CASE DATA(1GHz ~ 12.75GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24℃	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode-GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	1038.06	-79.93	9.94	-69.99	-47	-22.99	peak
V	2776.62	-81.89	9.82	-72.07	-47	-25.07	peak
V	3698.31	-78.11	10.02	-68.09	-47	-21.09	peak
V	4664.84	-81.20	16.13	-65.07	-47	-18.07	peak
V	4297.82	-80.69	16.16	-64.53	-47	-17.53	peak
V	4865.30	-84.49	16.19	-68.30	-47	-21.30	peak
H	2445.85	-80.06	10.11	-69.95	-47	-22.95	peak
H	2589.72	-81.67	10.68	-70.99	-47	-23.99	peak
H	3370.16	-81.06	10.21	-70.85	-47	-23.85	peak
H	3656.71	-78.05	11.23	-66.82	-47	-19.82	peak
H	4334.27	-83.51	8.60	-74.91	-47	-27.91	peak
H	5413.70	-80.25	14.56	-65.69	-47	-18.69	peak

9. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.

10. All the modes had been tested, but only the worst data recorded in the report.

Module 6

RX BELOW 1 GHz WORST- CASE DATA(30 MHz ~ 1GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24°C	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode-GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	42.77	-83.37	12.98	-70.39	-57	-13.39	peak
V	110.62	-78.75	11.67	-67.08	-57	-10.08	peak
V	219.44	-81.26	18.94	-62.32	-57	-5.32	peak
V	336.44	-83.09	11.65	-71.44	-57	-14.44	peak
V	615.53	-79.58	11.45	-68.13	-57	-11.13	peak
V	725.35	-83.78	11.45	-72.33	-57	-15.33	peak
H	40.52	-83.49	18.6	-64.89	-57	-7.89	peak
H	94.17	-77.09	18.11	-58.98	-57	-1.98	peak
H	227.68	-81.62	10.3	-71.32	-57	-14.32	peak
H	329.08	-82.33	15	-67.33	-57	-10.33	peak
H	544.96	-80.31	14.63	-65.68	-57	-8.68	peak
H	746.37	-84.89	14.63	-70.26	-57	-13.26	peak

Remark:

11. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.
12. All the modes had been tested, but only the worst data recorded in the report.

Module 6

RX ABOVE 1 GHz WORST- CASE DATA(1GHz ~ 12.75GHz)

EUT :	Gateway	Model Name :	G1-E
Temperature :	24°C	Relative Humidity :	57 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	RX Mode-GFSK(CH00)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	1585.41	-78.52	9.94	-68.58	-47	-21.58	peak
V	2404.65	-79.13	9.82	-69.31	-47	-22.31	peak
V	3010.74	-84.12	10.02	-74.10	-47	-27.10	peak
V	4990.55	-84.59	16.13	-68.46	-47	-21.46	peak
V	4258.57	-77.08	16.16	-60.92	-47	-13.92	peak
V	4616.48	-81.98	16.19	-65.79	-47	-18.79	peak
H	2670.84	-81.09	10.11	-70.98	-47	-23.98	peak
H	2875.08	-79.42	10.68	-68.74	-47	-21.74	peak
H	3021.02	-83.42	10.21	-73.21	-47	-26.21	peak
H	3809.19	-79.53	11.23	-68.30	-47	-21.30	peak
H	4389.23	-77.16	8.60	-68.56	-47	-21.56	peak
H	5390.88	-78.39	14.56	-63.83	-47	-16.83	peak

11. Emission Level= Meter Reading+ Factor, Margin= Emission Level- Limit.

12. All the modes had been tested, but only the worst data recorded in the report.

3.7.6 TEST RESULTS (Conducted measurement)

Test data reference attachment

3.8. RECEIVER BLOCKING

3.8.1 PERFORMANCE CRITERIA

The minimum performance criterion shall be a PER less than or equal to 10 %. The manufacturer may declare alternative performance criteria as long as that is appropriate for the intended use of the equipment (see clause 5.4.1.t)).

3.8.2 LIMITS OF RECEIVER BLOCKING

While maintaining the minimum performance criteria as defined in clause 4.3.2.11.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in table 14, table 15 or table 16.

☐ **Table 14: Receiver Blocking parameters for Receiver Category 1 equipment**

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal Frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
$(-133 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2524 2584 2674		

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 20 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

☒ **Table 15: Receiver Blocking parameters receiver category 2 equipment**

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal Frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$ or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

☒ **Table 16: Receiver Blocking parameters receiver category 3 equipment**

Wanted signal mean power from companion device (dBm)	Blocking signal Frequency (MHz)	Blocking signal power (dBm) (see note 2)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 20 \text{ dB})$ or $(-74 \text{ dBm} + 20 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative the test may be performed using a wanted signal up to $P_{\min} + 30 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

3.8.3 TEST PROCEDURE


Refer to chapter 5.4.11.2 of ETSI EN 300 328 V2.2.2 (2019-07)

Measurement	
<input checked="" type="checkbox"/> Conducted measurement	<input type="checkbox"/> Radiated measurement

3.8.4 DEVIATION FROM TEST STANDARD

No deviation

3.8.5 TEST SETUP

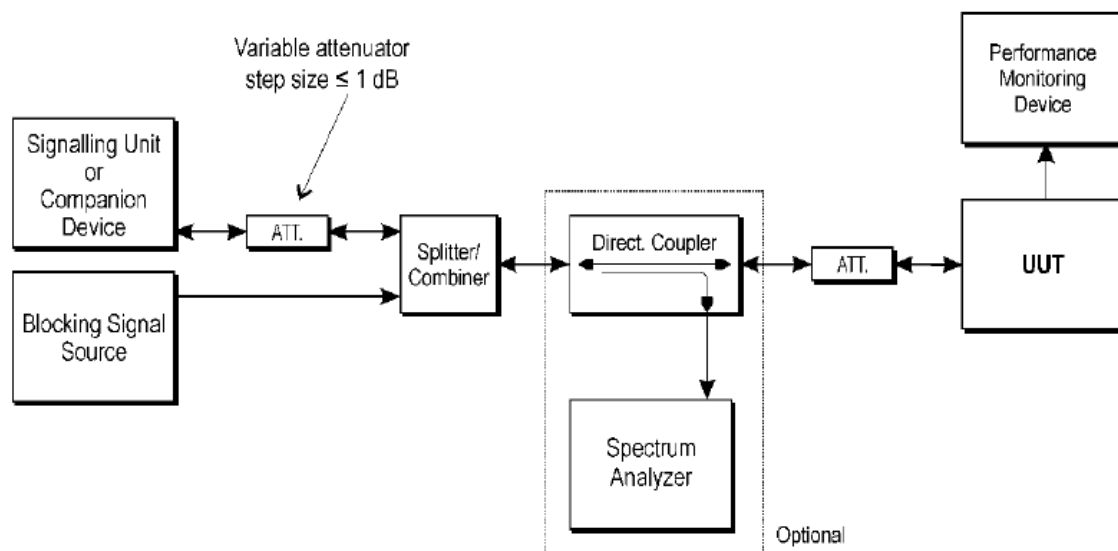

3.8.6 TEST RESULTS

Module 1
1M

EUT :	Gateway	Model Name :	G1-E
Temperature :	26℃	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	GFSK-RX Mode (CH00/CH39)		

CH00:

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(3)</small>	PER Limit %
-68.88	2 380	-34	0.24%	≤10%
	2 504		0.82%	
	2 300		0.55%	≤10%
	2 584		0.30%	

CH39:

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(3)</small>	PER Limit %
-68.87	2 380	-34	0.81%	≤10%
	2 504		0.70%	
	2 300		0.06%	≤10%
	2 584		0.70%	

Module 1
2M

EUT :	Gateway	Model Name :	G1-E
Temperature :	26℃	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	GFSK-RX Mode (CH00/CH39)		

CH00 :

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal	Blocking signal power	PER	PER Limit
	Frequency (MHz)	(dBm)	%	%
-65.89	2 380	-34	0.18%	≤10%
	2 504		0.72%	
	2 300		0.38%	≤10%
	2 584		0.59%	

CH39 :

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal	Blocking signal power	PER	PER Limit
	Frequency (MHz)	(dBm)	%	%
-65.88	2 380	-34	0.55%	≤10%
	2 504		0.62%	
	2 300		0.51%	≤10%
	2 584		0.91%	

Module 2

1M

EUT :	Gateway	Model Name :	G1-E
Temperature :	26℃	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	GFSK-RX Mode (CH00/CH39)		

CH00:

receiver category 2

Wanted signal mean power from companion device (dBm) Note(1)	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % Note(3)	PER Limit %
-68.89	2 380	-34	0.68%	≤10%
	2 504		0.37%	
	2 300		0.35%	≤10%
	2 584		0.03%	

CH39:

receiver category 2

Wanted signal mean power from companion device (dBm) Note(1)	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % Note(3)	PER Limit %
-68.88	2 380	-34	0.21%	≤10%
	2 504		0.38%	
	2 300		0.23%	≤10%
	2 584		0.93%	

Module 2
2M

EUT :	Gateway	Model Name :	G1-E
Temperature :	26℃	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	GFSK-RX Mode (CH00/CH39)		

CH00 :

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal	Blocking signal power	PER	PER Limit
	Frequency (MHz)	(dBm)	%	%
-65.83	2 380	-34	0.45%	≤10%
	2 504		0.48%	
	2 300		0.33%	≤10%
	2 584		0.73%	

CH39 :

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal	Blocking signal power	PER	PER Limit
	Frequency (MHz)	(dBm)	%	%
-65.81	2 380	-34	0.67%	≤10%
	2 504		0.45%	
	2 300		0.35%	≤10%
	2 584		0.25%	

Module 3

1M

EUT :	Gateway	Model Name :	G1-E
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	GFSK-RX Mode (CH00/CH39)		

CH00:

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(3)</small>	PER Limit %
-68.89	2 380	-34	0.60%	≤10%
	2 504		0.77%	
	2 300		0.41%	≤10%
	2 584		0.66%	

CH39:

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(3)</small>	PER Limit %
-68.89	2 380	-34	0.60%	≤10%
	2 504		0.71%	
	2 300		0.77%	≤10%
	2 584		0.08%	

Module 3
2M

EUT :	Gateway	Model Name :	G1-E
Temperature :	26℃	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	GFSK-RX Mode (CH00/CH39)		

CH00 :

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal	Blocking signal power	PER	PER Limit
	Frequency (MHz)	(dBm)	%	%
-65.88	2 380	-34	0.21%	≤10%
	2 504		0.94%	
	2 300		0.03%	≤10%
	2 584		0.05%	

CH39 :

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal	Blocking signal power	PER	PER Limit
	Frequency (MHz)	(dBm)	%	%
-65.87	2 380	-34	0.31%	≤10%
	2 504		0.85%	
	2 300		0.59%	≤10%
	2 584		0.23%	

Module 4

1M

EUT :	Gateway	Model Name :	G1-E
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	GFSK-RX Mode (CH00/CH39)		

CH00:

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(3)</small>	PER Limit %
-68.88	2 380	-34	0.74%	≤10%
	2 504		0.75%	
	2 300		0.94%	≤10%
	2 584		0.06%	

CH39:

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(3)</small>	PER Limit %
-68.88	2 380	-34	0.45%	≤10%
	2 504		0.56%	
	2 300		0.28%	≤10%
	2 584		0.77%	

Module 4
2M

EUT :	Gateway	Model Name :	G1-E
Temperature :	26℃	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	GFSK-RX Mode (CH00/CH39)		

CH00 :

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal	Blocking signal power	PER	PER Limit
	Frequency (MHz)	(dBm)	%	%
-55.83	2 380	-34	0.83%	≤10%
	2 504		0.15%	
	2 300		0.95%	≤10%
	2 584		0.07%	

CH39 :

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal	Blocking signal power	PER	PER Limit
	Frequency (MHz)	(dBm)	%	%
-55.77	2 380	-34	0.59%	≤10%
	2 504		0.03%	
	2 300		0.20%	≤10%
	2 584		0.07%	

Module 5

1M

EUT :	Gateway	Model Name :	G1-E
Temperature :	26°C	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	GFSK-RX Mode (CH00/CH39)		

CH00:

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(3)</small>	PER Limit %
-68.89	2 380	-34	0.40%	≤10%
	2 504		0.35%	
	2 300		0.42%	≤10%
	2 584		0.84%	

CH39:

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % <small>Note(3)</small>	PER Limit %
-68.87	2 380	-34	0.57%	≤10%
	2 504		0.63%	
	2 300		0.51%	≤10%
	2 584		0.01%	

Module 5
2M

EUT :	Gateway	Model Name :	G1-E
Temperature :	26℃	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	GFSK-RX Mode (CH00/CH39)		

CH00 :

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal	Blocking signal power	PER	PER Limit
	Frequency (MHz)	(dBm)	%	%
-55.83	2 380	-34	0.46%	≤10%
	2 504		0.97%	
	2 300		0.83%	≤10%
	2 584		0.23%	

CH39 :

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal	Blocking signal power	PER	PER Limit
	Frequency (MHz)	(dBm)	%	%
-55.87	2 380	-34	0.64%	≤10%
	2 504		0.23%	
	2 300		0.07%	≤10%
	2 584		0.69%	

Module 6

1M

EUT :	Gateway	Model Name :	G1-E
Temperature :	26℃	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	GFSK-RX Mode (CH00/CH39)		

CH00:

receiver category 2

Wanted signal mean power from companion device (dBm) Note(1)	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % Note(3)	PER Limit %
-68.91	2 380	-34	0.33%	≤10%
	2 504		0.90%	
	2 300		0.81%	≤10%
	2 584		0.06%	

CH39:

receiver category 2

Wanted signal mean power from companion device (dBm) Note(1)	Blocking signal Frequency (MHz)	Blocking signal power (dBm)	PER % Note(3)	PER Limit %
-68.89	2 380	-34	0.22%	≤10%
	2 504		0.67%	
	2 300		0.86%	≤10%
	2 584		0.91%	

Module 6
2M

EUT :	Gateway	Model Name :	G1-E
Temperature :	26℃	Relative Humidity :	60 %
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	GFSK-RX Mode (CH00/CH39)		

CH00 :

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal	Blocking signal power	PER	PER Limit
	Frequency (MHz)	(dBm)	%	%
-65.89	2 380	-34	0.14%	≤10%
	2 504		0.90%	
	2 300		0.92%	≤10%
	2 584		0.11%	

CH39 :

receiver category 2

Wanted signal mean power from companion device (dBm) <small>Note(1)</small>	Blocking signal	Blocking signal power	PER	PER Limit
	Frequency (MHz)	(dBm)	%	%
-65.88	2 380	-34	0.98%	≤10%
	2 504		0.96%	
	2 300		0.87%	≤10%
	2 584		0.13%	

Note: (1) The above results were obtained from laboratory tests.

4. TEST RESULTS


Module 1

1M


4.1 RF Output Power

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	1.19	241	6.19	20	Pass
NVNT	BLE	2440	1.77	241	6.77	20	Pass
NVNT	BLE	2480	1.39	241	6.39	20	Pass
NVLT	BLE	2402	0.34	241	5.34	20	Pass
NVLT	BLE	2440	0.99	241	5.99	20	Pass
NVLT	BLE	2480	0.85	241	5.85	20	Pass
NVHT	BLE	2402	0.28	241	5.28	20	Pass
NVHT	BLE	2440	1.09	241	6.09	20	Pass
NVHT	BLE	2480	1.05	241	6.05	20	Pass


Power NVNT BLE 2402MHz

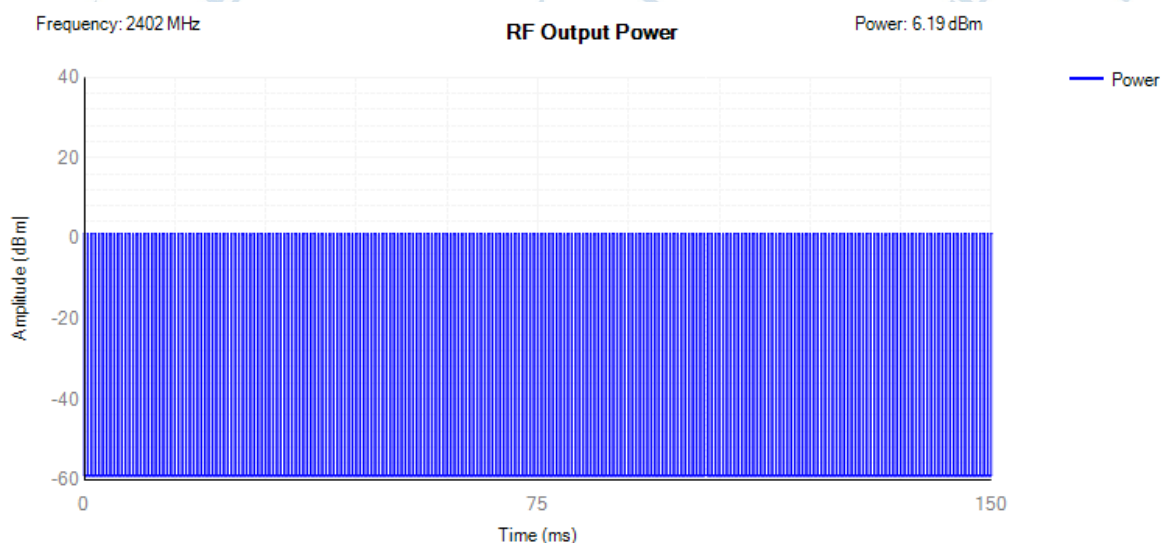

Power NVNT BLE 2440MHz

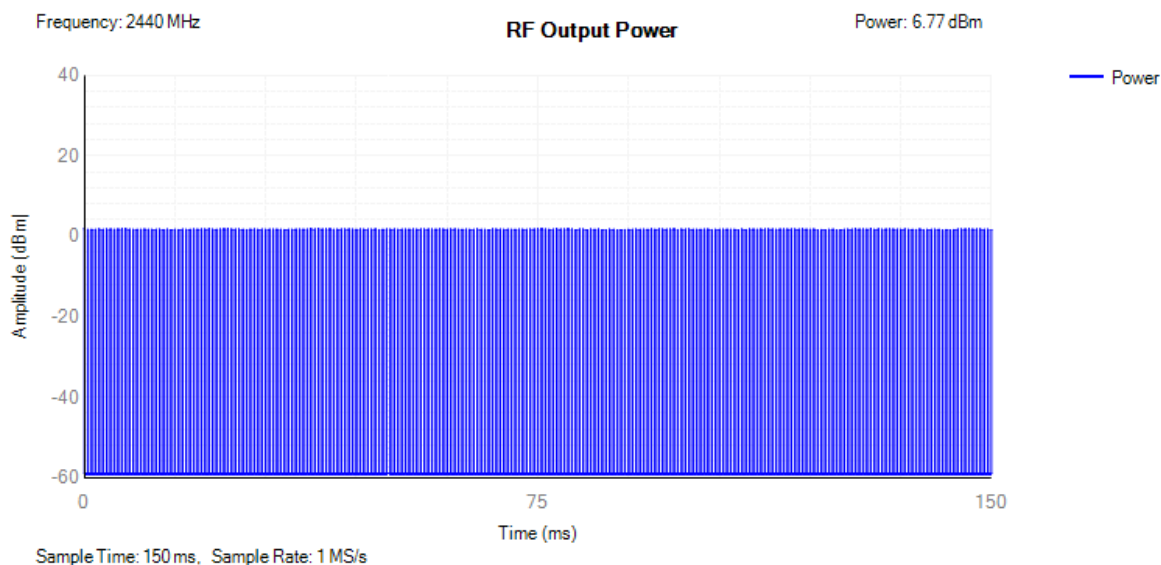


Power NVNT BLE 2480MHz

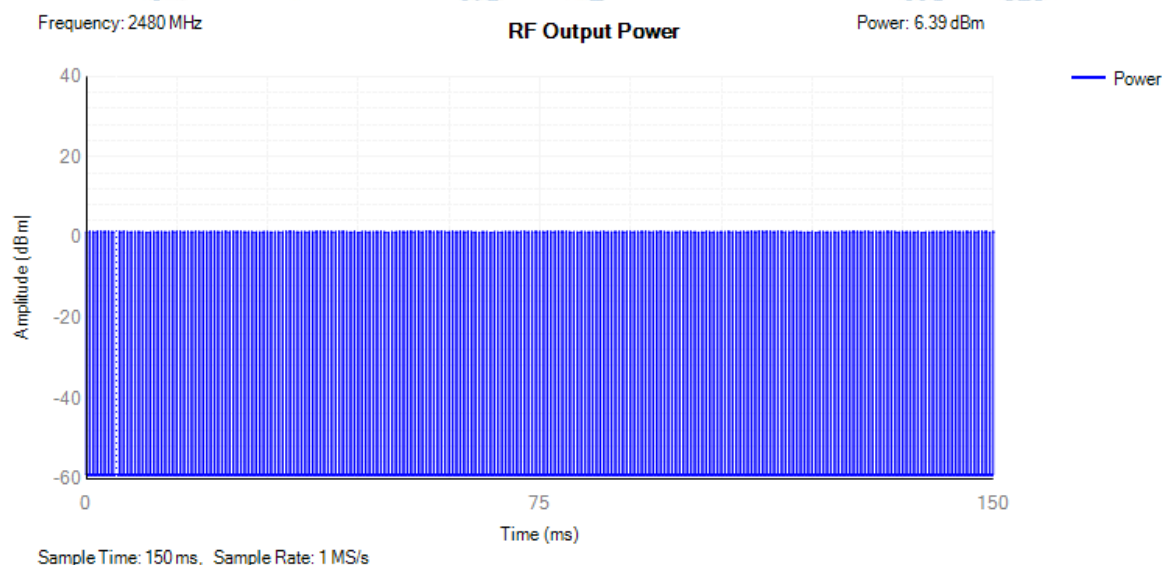


4.2 Power Spectral Density


Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	6.1	10	Pass
NVNT	BLE	2440	6.69	10	Pass
NVNT	BLE	2480	6.31	10	Pass

PSD NVNT BLE 2402MHz

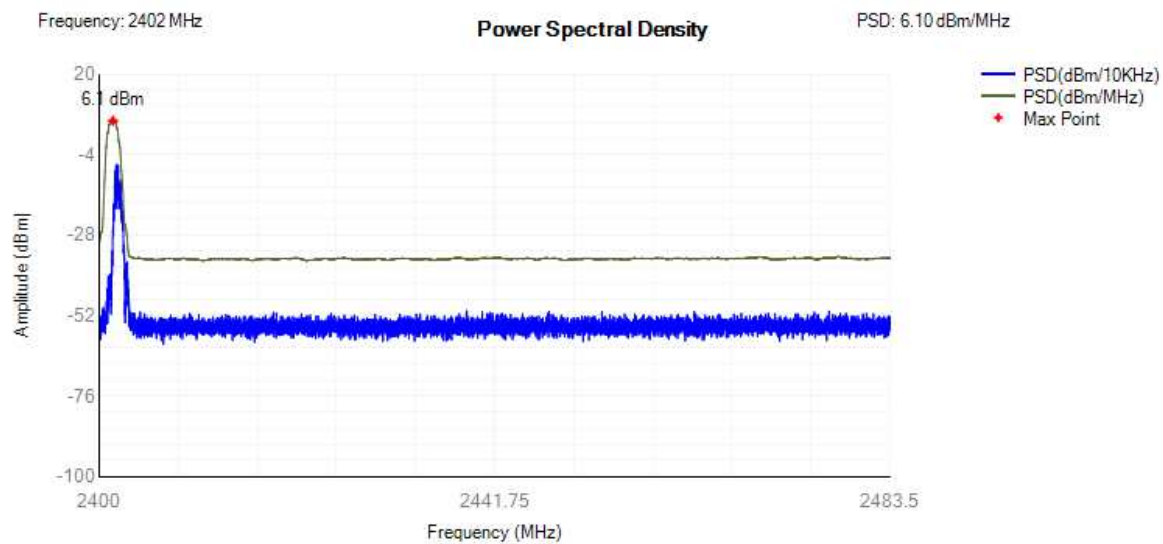

PSD NVNT BLE 2440MHz

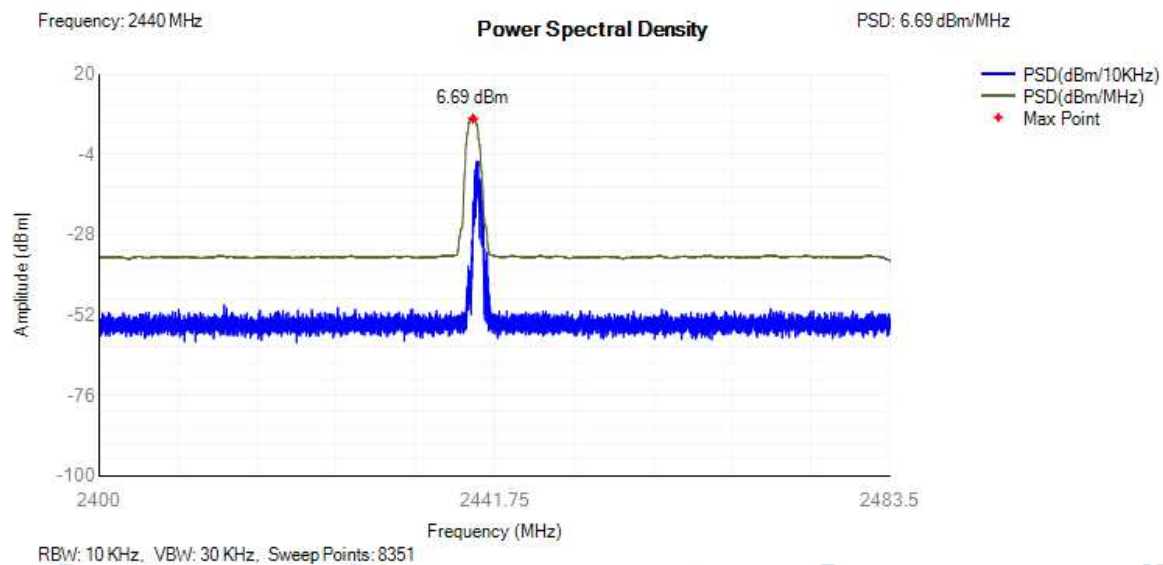


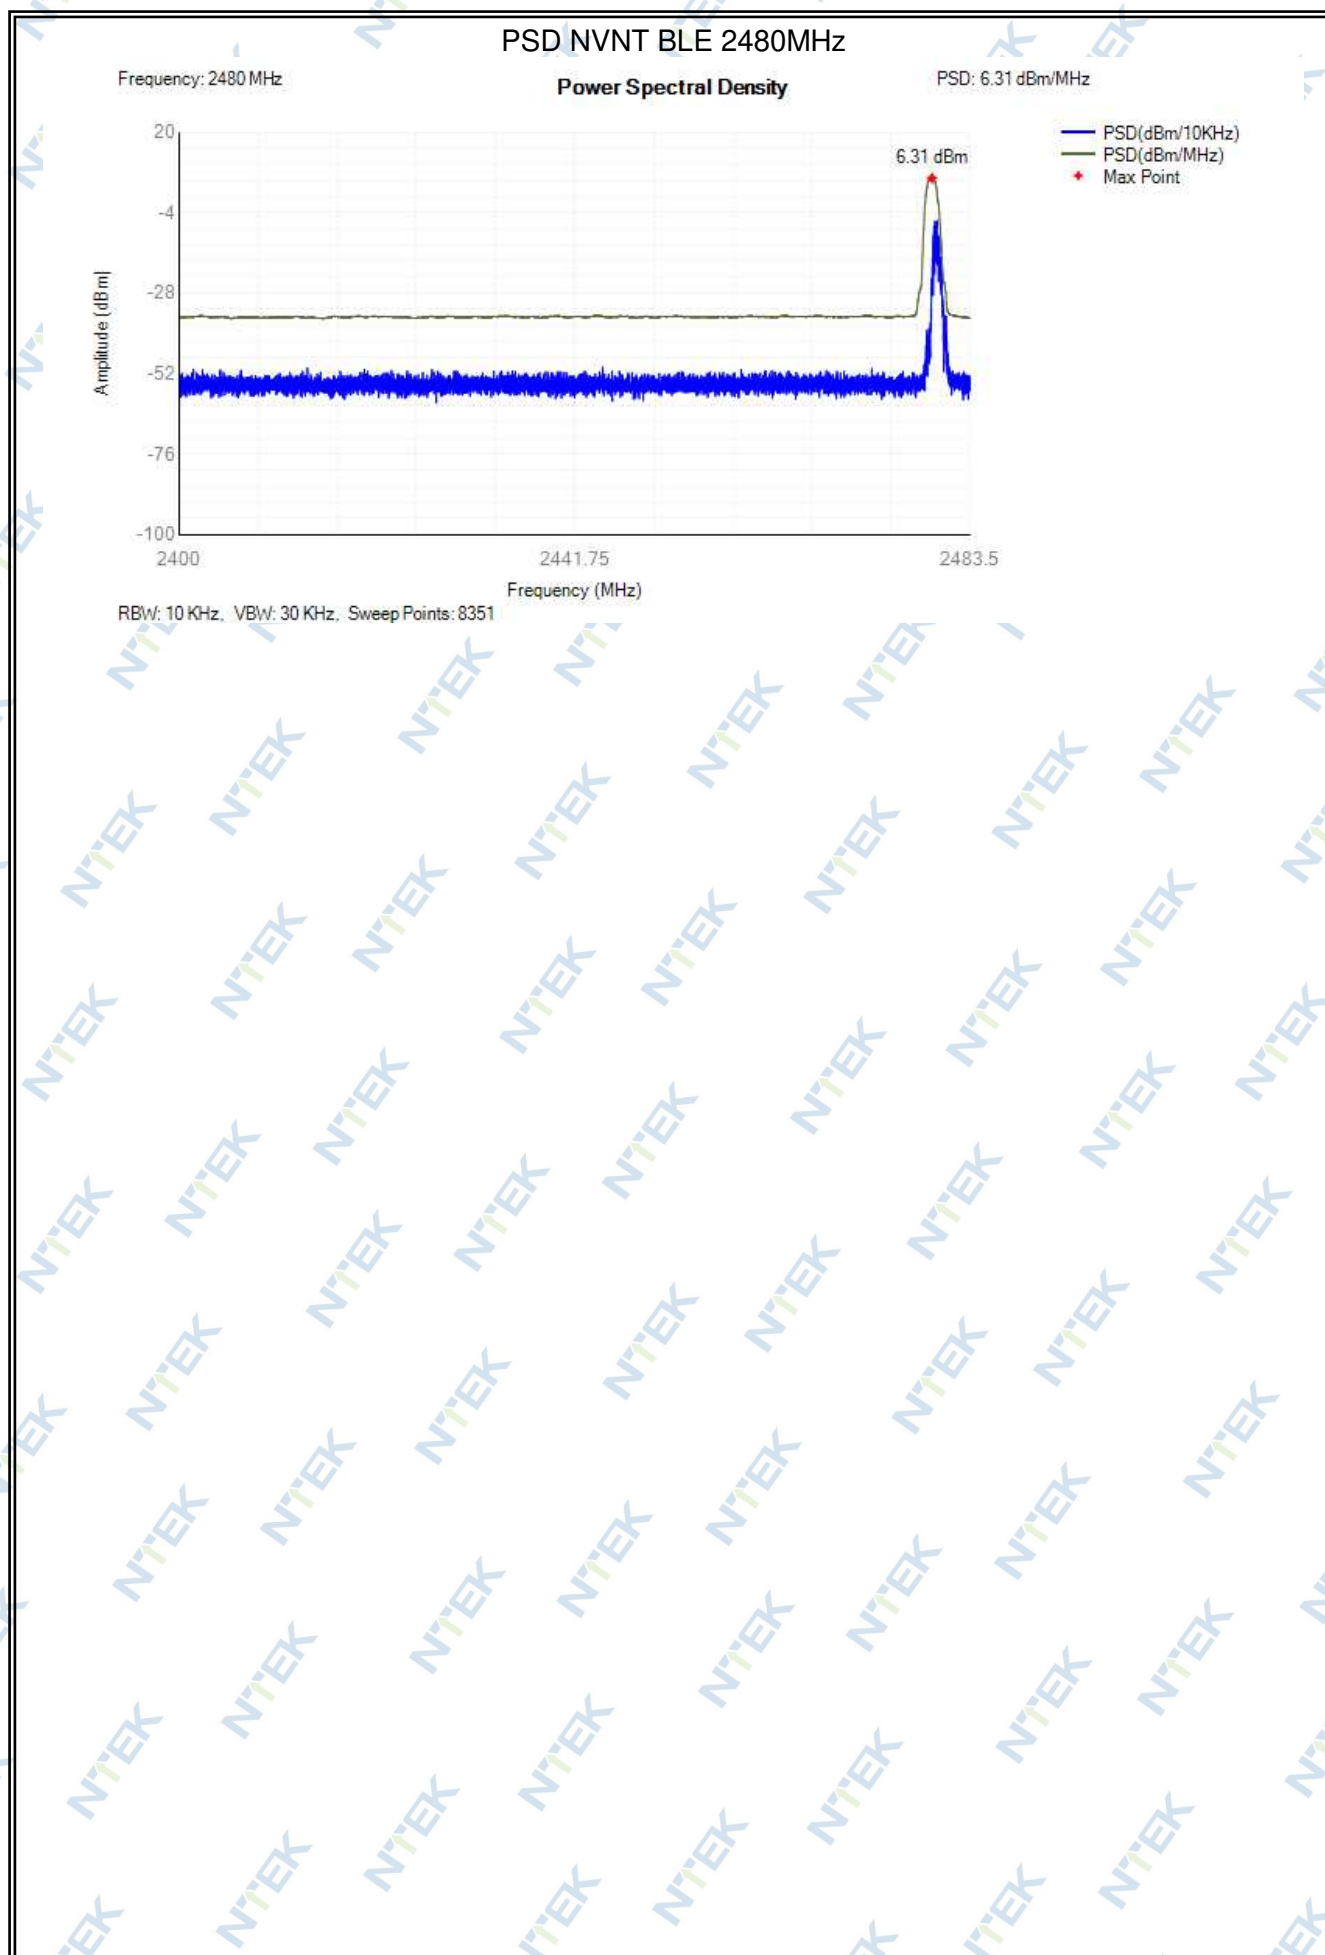


4.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	BLE	2402	2401.998	1.027	2401.485	2402.511	2400 - 2483.5MHz	Pass
NVNT	BLE	2440	2439.996	1.027	2439.483	2440.509	2400 - 2483.5MHz	Pass
NVNT	BLE	2480	2479.996	1.031	2479.481	2480.511	2400 - 2483.5MHz	Pass

OBW NVNT BLE 2402MHz

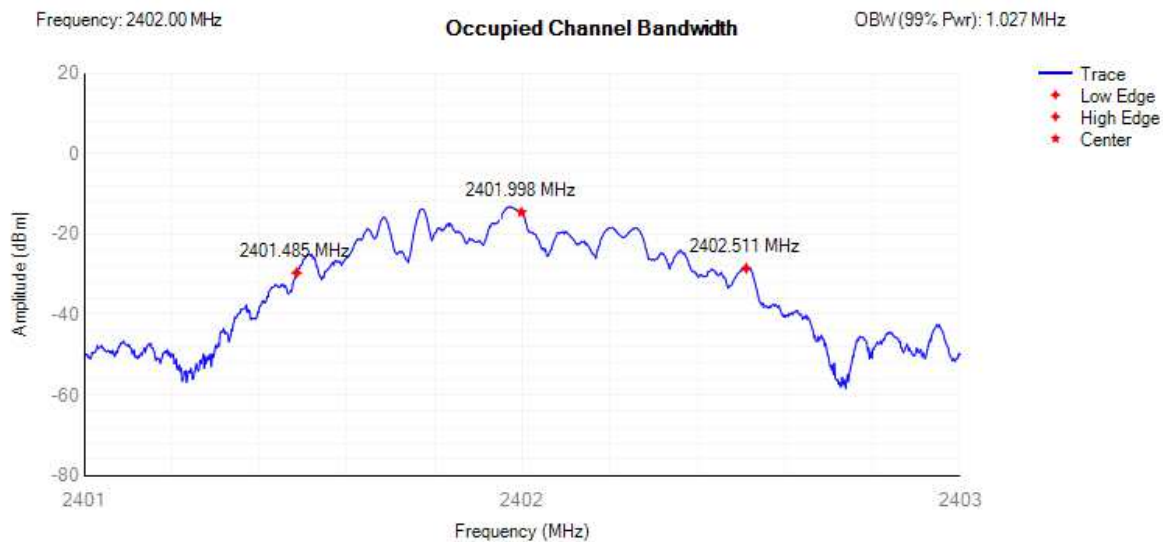

OBW NVNT BLE 2440MHz

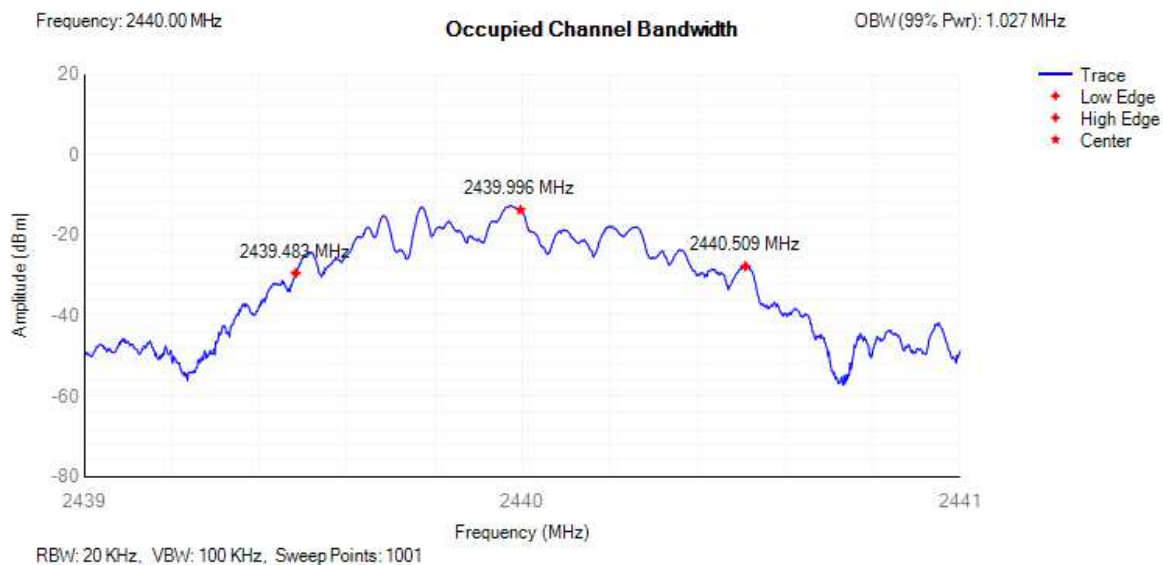


OBW NVNT BLE 2480MHz

Frequency: 2480.00 MHz

Occupied Channel Bandwidth

OBW (99% Pwr): 1.031 MHz

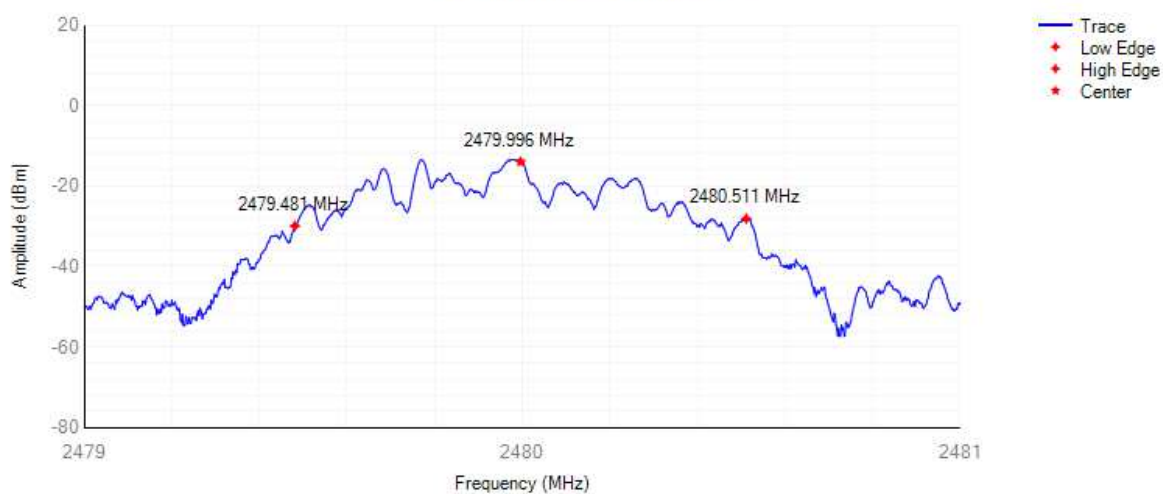


RBW: 20 KHz, VBW: 100 KHz, Sweep Points: 1001


4.4 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	2399.5	-63.25	-10	Pass
NVNT	BLE	2402	2399.473	-63.92	-10	Pass
NVNT	BLE	2402	2398.473	-63.61	-20	Pass
NVNT	BLE	2402	2398.446	-60.76	-20	Pass
NVNT	BLE	2480	2484	-54.63	-10	Pass
NVNT	BLE	2480	2484.031	-63.29	-10	Pass
NVNT	BLE	2480	2485.031	-63.34	-20	Pass
NVNT	BLE	2480	2485.062	-63.12	-20	Pass

Tx. Emissions OOB NVNT BLE 2402MHz

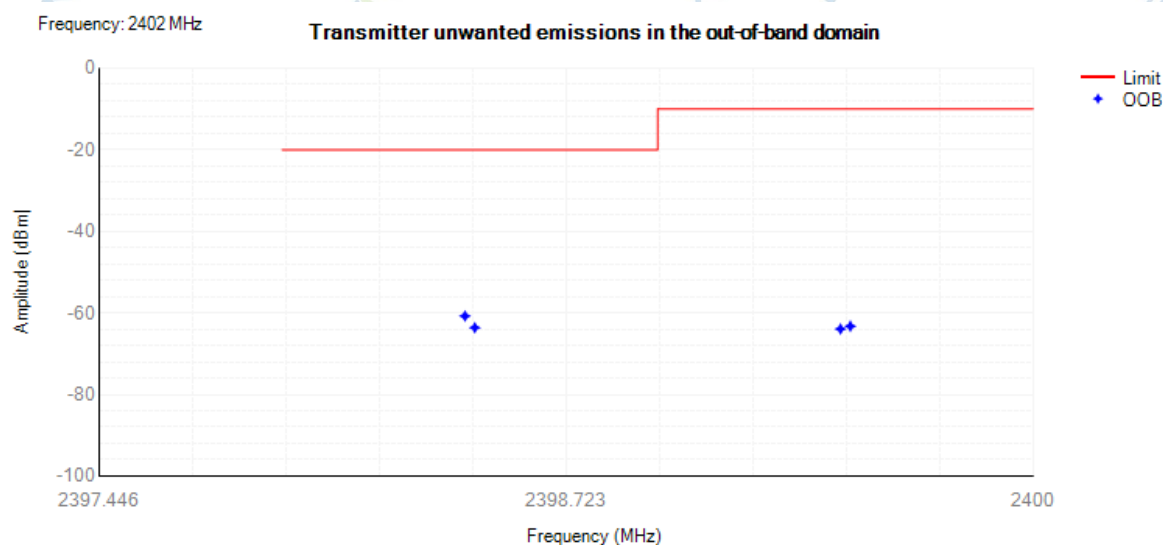

Tx. Emissions OOB NVNT BLE 2480MHz

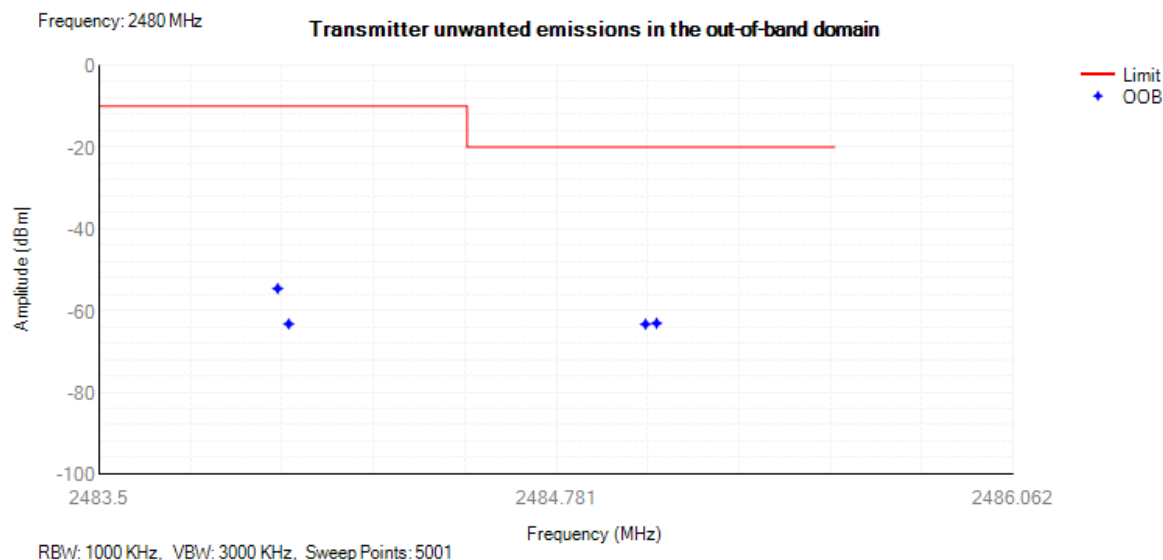


4.5 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -47 MHz	42.4	-65.91	NA	-36	Pass
NVNT	BLE	2402	47 MHz -74 MHz	55.1	-65.61	NA	-54	Pass
NVNT	BLE	2402	74 MHz -87.5 MHz	85.05	-65.84	NA	-36	Pass
NVNT	BLE	2402	87.5 MHz -118 MHz	88.4	-65.7	NA	-54	Pass
NVNT	BLE	2402	118 MHz -174 MHz	136.45	-65.91	NA	-36	Pass
NVNT	BLE	2402	174 MHz -230 MHz	190	-65.79	NA	-54	Pass
NVNT	BLE	2402	230 MHz -470 MHz	319.05	-63.87	NA	-36	Pass
NVNT	BLE	2402	470 MHz -694 MHz	584.75	-64.63	NA	-54	Pass
NVNT	BLE	2402	694 MHz -1000 MHz	826.05	-61.57	NA	-36	Pass
NVNT	BLE	2402	1000 MHz -2398 MHz	2395.5	-44.82	NA	-30	Pass
NVNT	BLE	2402	2485.5 MHz -12750 MHz	6994	-44.98	NA	-30	Pass
NVNT	BLE	2440	30 MHz -47 MHz	39.7	-66.35	NA	-36	Pass
NVNT	BLE	2440	47 MHz -74 MHz	55.05	-66.9	NA	-54	Pass
NVNT	BLE	2440	74 MHz -87.5 MHz	76.15	-66.4	NA	-36	Pass
NVNT	BLE	2440	87.5 MHz -118 MHz	108.1	-65.27	NA	-54	Pass
NVNT	BLE	2440	118 MHz -174 MHz	142.7	-65.05	NA	-36	Pass
NVNT	BLE	2440	174 MHz -230 MHz	181.6	-64.71	NA	-54	Pass
NVNT	BLE	2440	230 MHz -470 MHz	351	-65.25	NA	-36	Pass
NVNT	BLE	2440	470 MHz -694 MHz	539.45	-64.45	NA	-54	Pass
NVNT	BLE	2440	694 MHz -1000 MHz	938.9	-63.16	NA	-36	Pass
NVNT	BLE	2440	1000 MHz -2398 MHz	2331	-50.39	NA	-30	Pass
NVNT	BLE	2440	2485.5 MHz -12750 MHz	6749	-44.71	NA	-30	Pass
NVNT	BLE	2480	30 MHz -47 MHz	30.1	-66.72	NA	-36	Pass
NVNT	BLE	2480	47 MHz -74 MHz	49.05	-67.41	NA	-54	Pass
NVNT	BLE	2480	74 MHz -87.5 MHz	81.75	-66.74	NA	-36	Pass
NVNT	BLE	2480	87.5 MHz -118 MHz	91.3	-66.34	NA	-54	Pass
NVNT	BLE	2480	118 MHz -174 MHz	143.95	-65.69	NA	-36	Pass
NVNT	BLE	2480	174 MHz -230 MHz	193.8	-65.08	NA	-54	Pass
NVNT	BLE	2480	230 MHz -470 MHz	238.15	-64.01	NA	-36	Pass
NVNT	BLE	2480	470 MHz -694 MHz	620.7	-64.93	NA	-54	Pass
NVNT	BLE	2480	694 MHz -1000 MHz	955.75	-63.92	NA	-36	Pass
NVNT	BLE	2480	1000 MHz -2398 MHz	2335	-50.21	NA	-30	Pass
NVNT	BLE	2480	2485.5 MHz -12750 MHz	6964.5	-44.12	NA	-30	Pass

Tx. Spurious NVNT BLE 2402MHz

Frequency: 2402 MHz


Transmitter unwanted emissions in the spurious domain

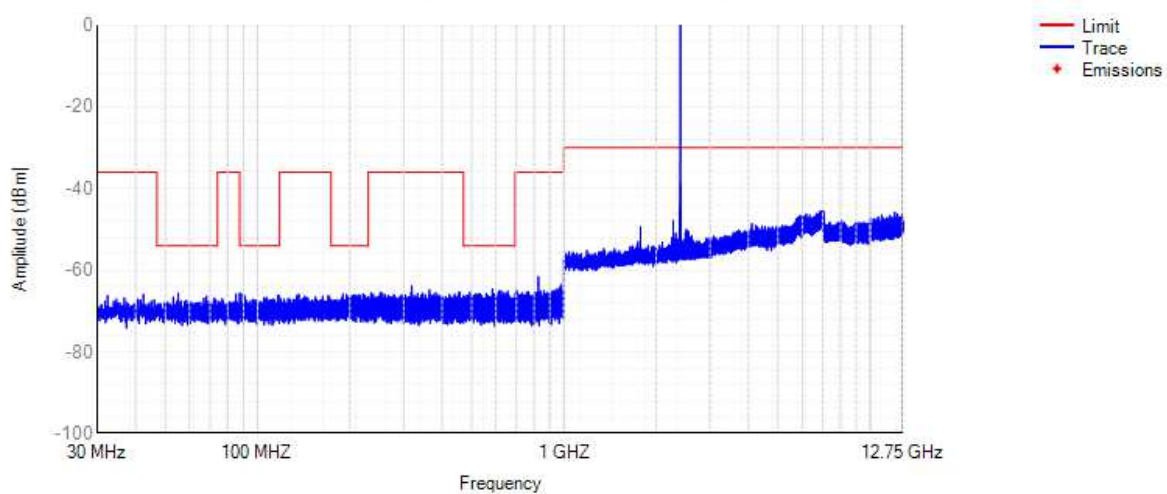

Tx. Spurious NVNT BLE 2440MHz

Frequency: 2440 MHz


Transmitter unwanted emissions in the spurious domain

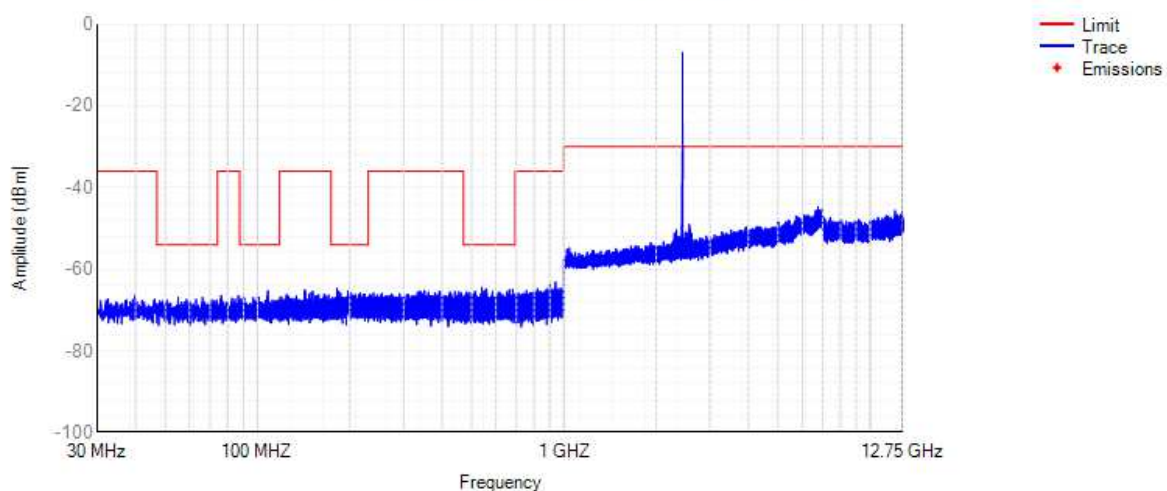

Tx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz


Transmitter unwanted emissions in the spurious domain

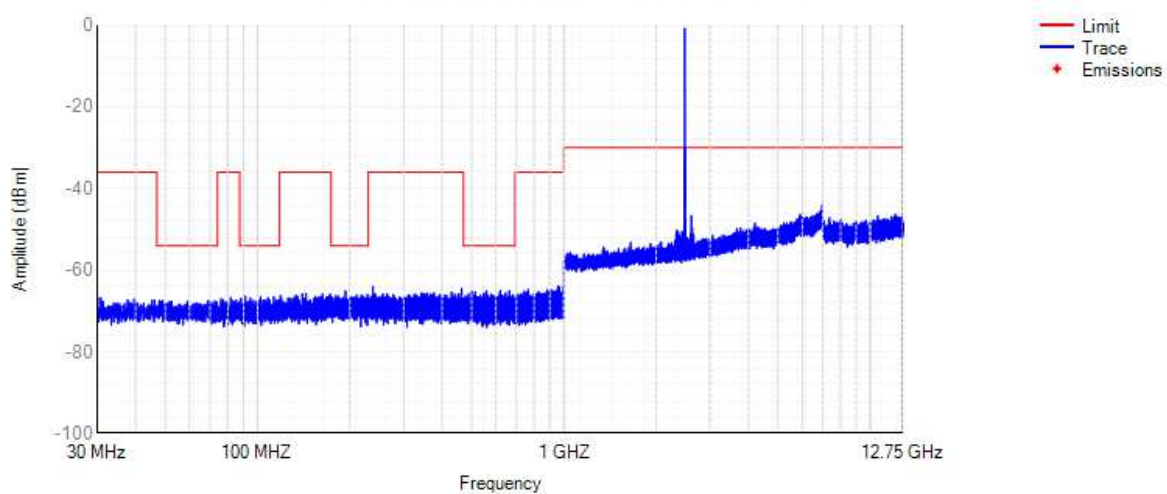


4.6 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -1000 MHz	907.753	-73.53	NA	-57	Pass
NVNT	BLE	2402	1000 MHz -12750 MHz	6954.5	-55.38	NA	-47	Pass
NVNT	BLE	2440	30 MHz -1000 MHz	944.25	-73.24	NA	-57	Pass
NVNT	BLE	2440	1000 MHz -12750 MHz	1779.5	-53.4	NA	-47	Pass
NVNT	BLE	2480	30 MHz -1000 MHz	827.2	-71.51	NA	-57	Pass
NVNT	BLE	2480	1000 MHz -12750 MHz	6995	-54.16	NA	-47	Pass

Rx. Spurious NVNT BLE 2402MHz

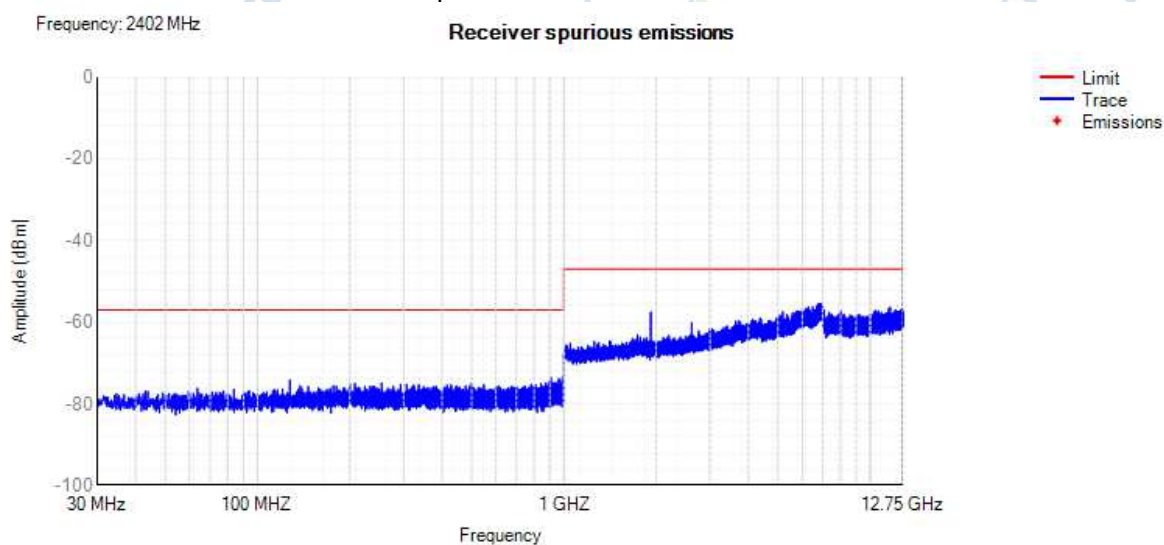


Rx. Spurious NVNT BLE 2440MHz

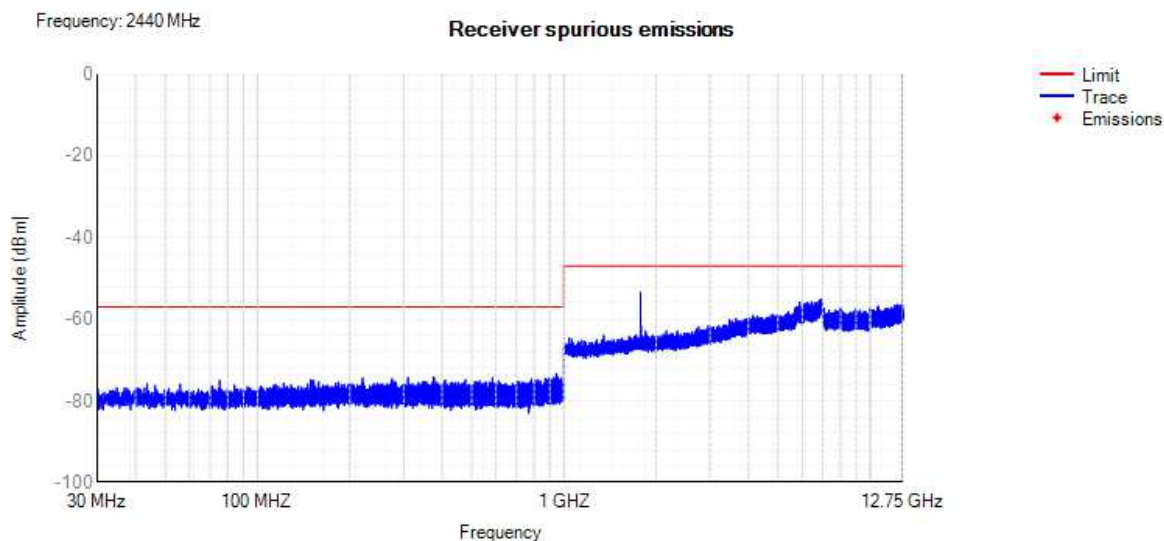

Rx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz

Receiver spurious emissions

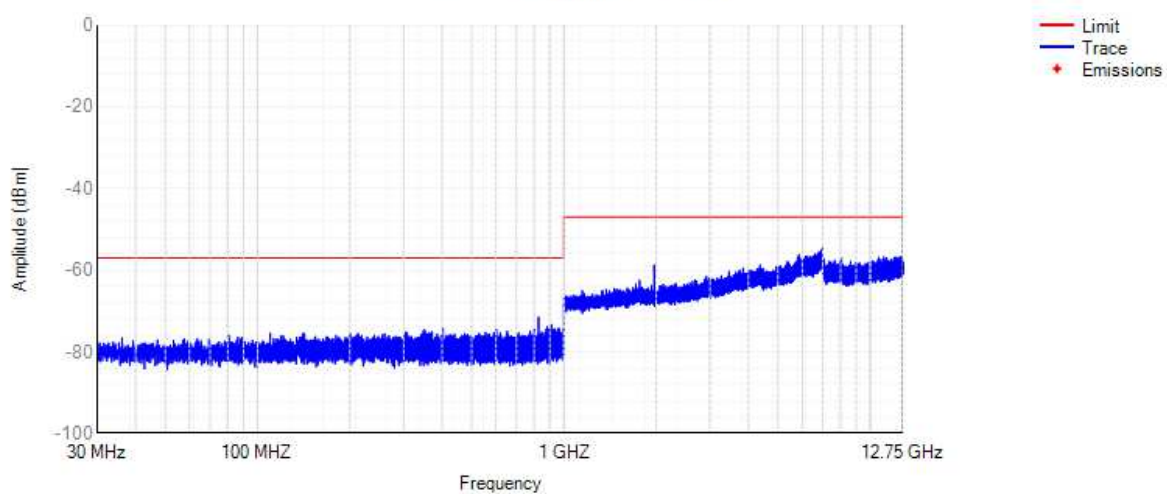


Module 1 2M


4.7 RF Output Power

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	1.12	160	6.12	20	Pass
NVNT	BLE	2440	1.72	160	6.72	20	Pass
NVNT	BLE	2480	1.36	160	6.36	20	Pass
NVLT	BLE	2402	0.27	160	5.27	20	Pass
NVLT	BLE	2440	0.94	160	5.94	20	Pass
NVLT	BLE	2480	0.82	160	5.82	20	Pass
NVHT	BLE	2402	0.21	160	5.21	20	Pass
NVHT	BLE	2440	1.04	160	6.04	20	Pass
NVHT	BLE	2480	1.02	160	6.02	20	Pass


Power NVNT BLE 2402MHz

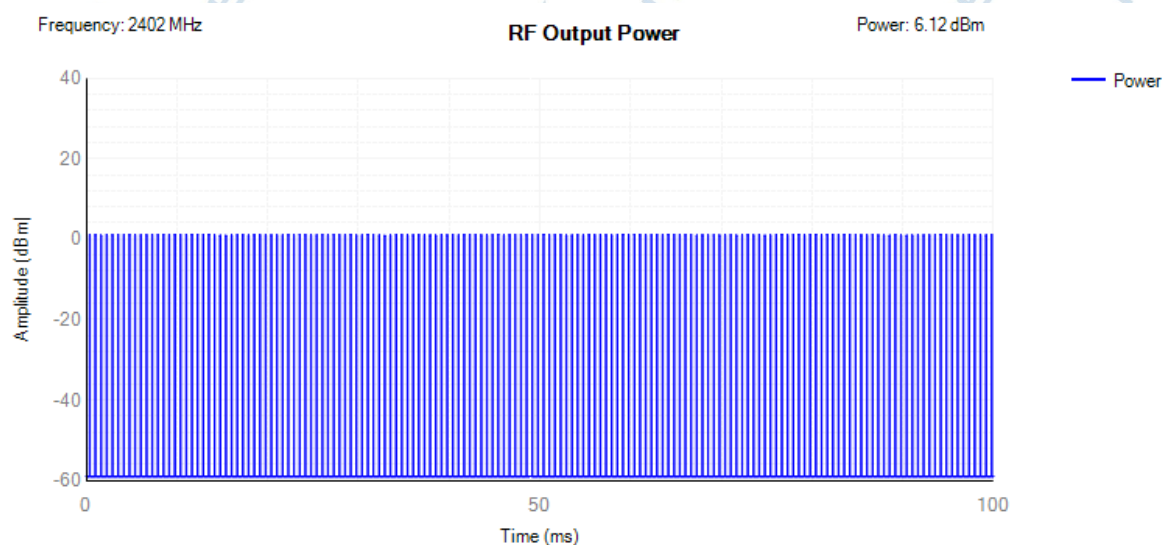

Power NVNT BLE 2440MHz

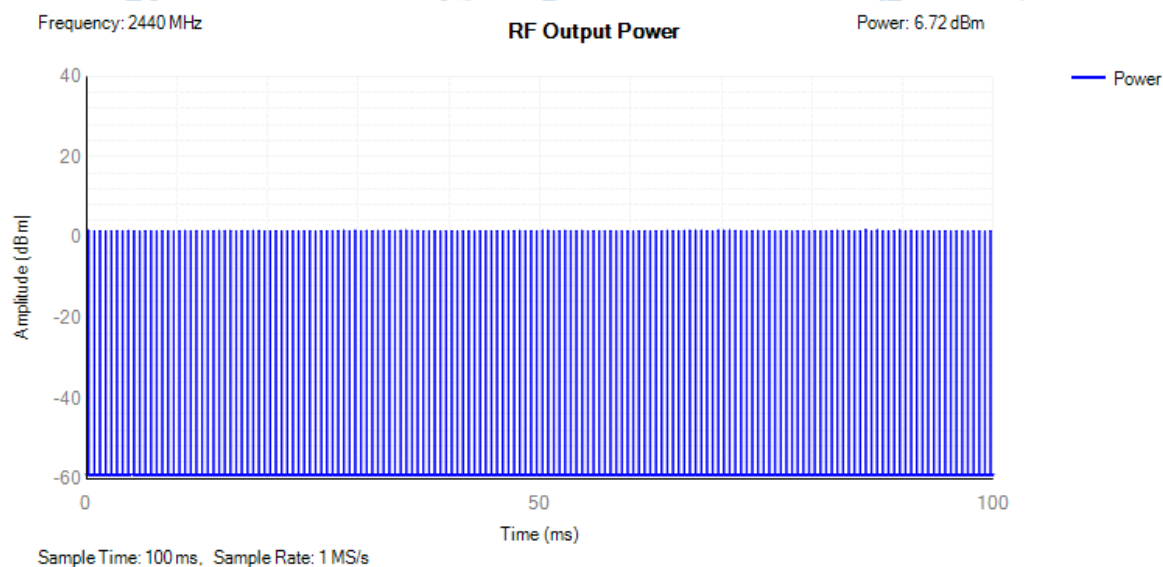


Power NVNT BLE 2480MHz

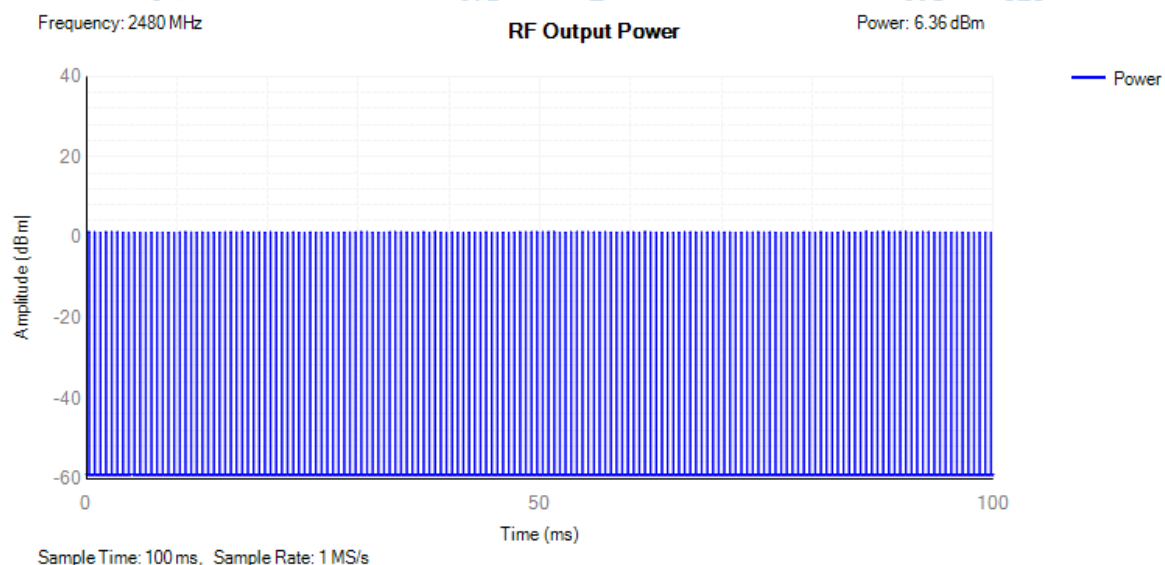


4.8 Power Spectral Density


Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	5.2	10	Pass
NVNT	BLE	2440	5.84	10	Pass
NVNT	BLE	2480	5.46	10	Pass

PSD NVNT BLE 2402MHz

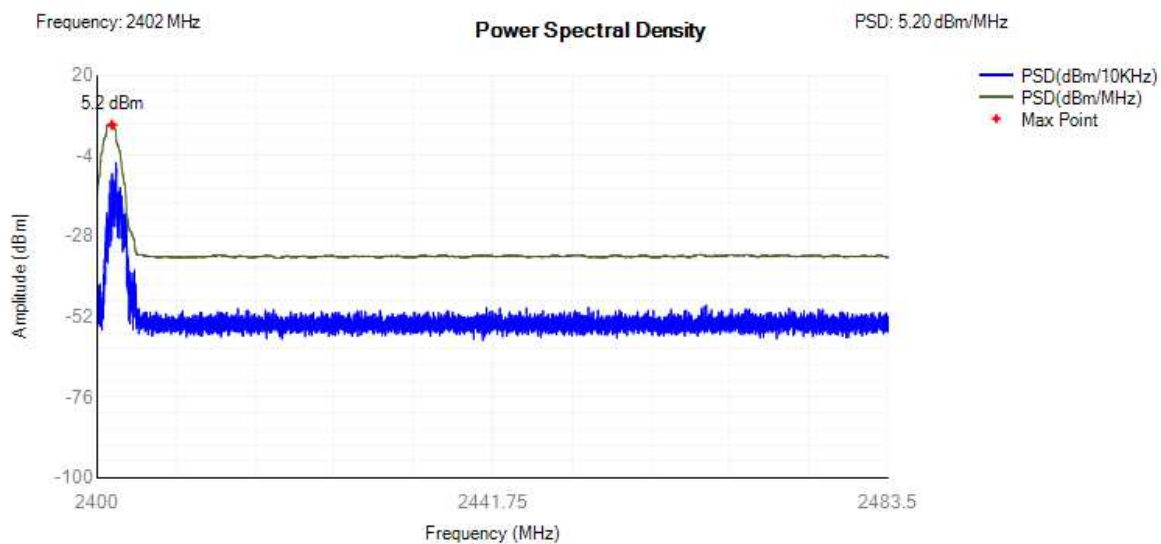

PSD NVNT BLE 2440MHz

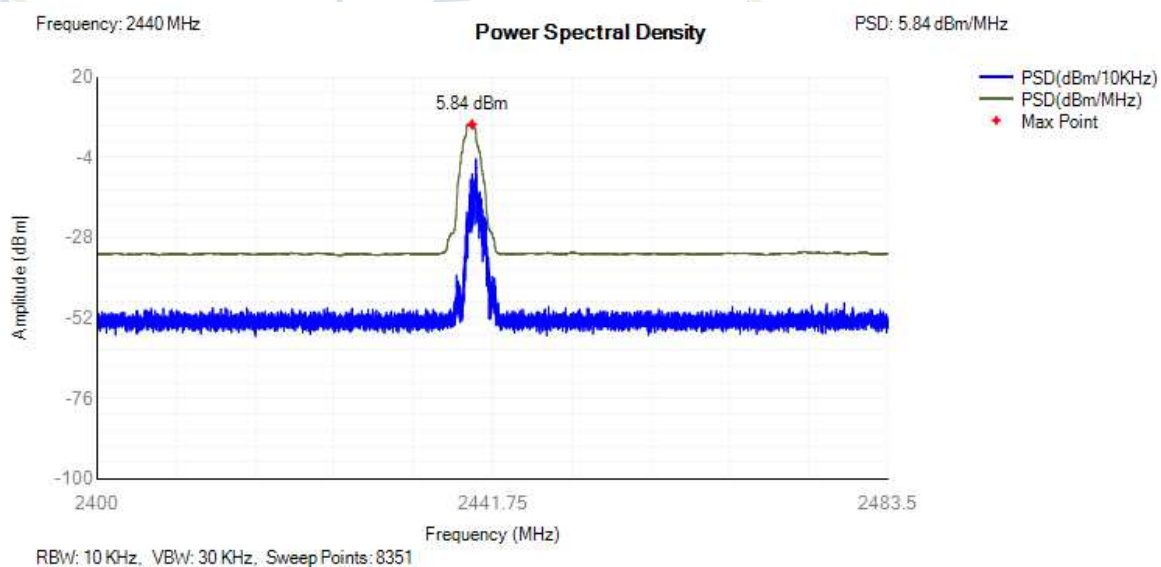


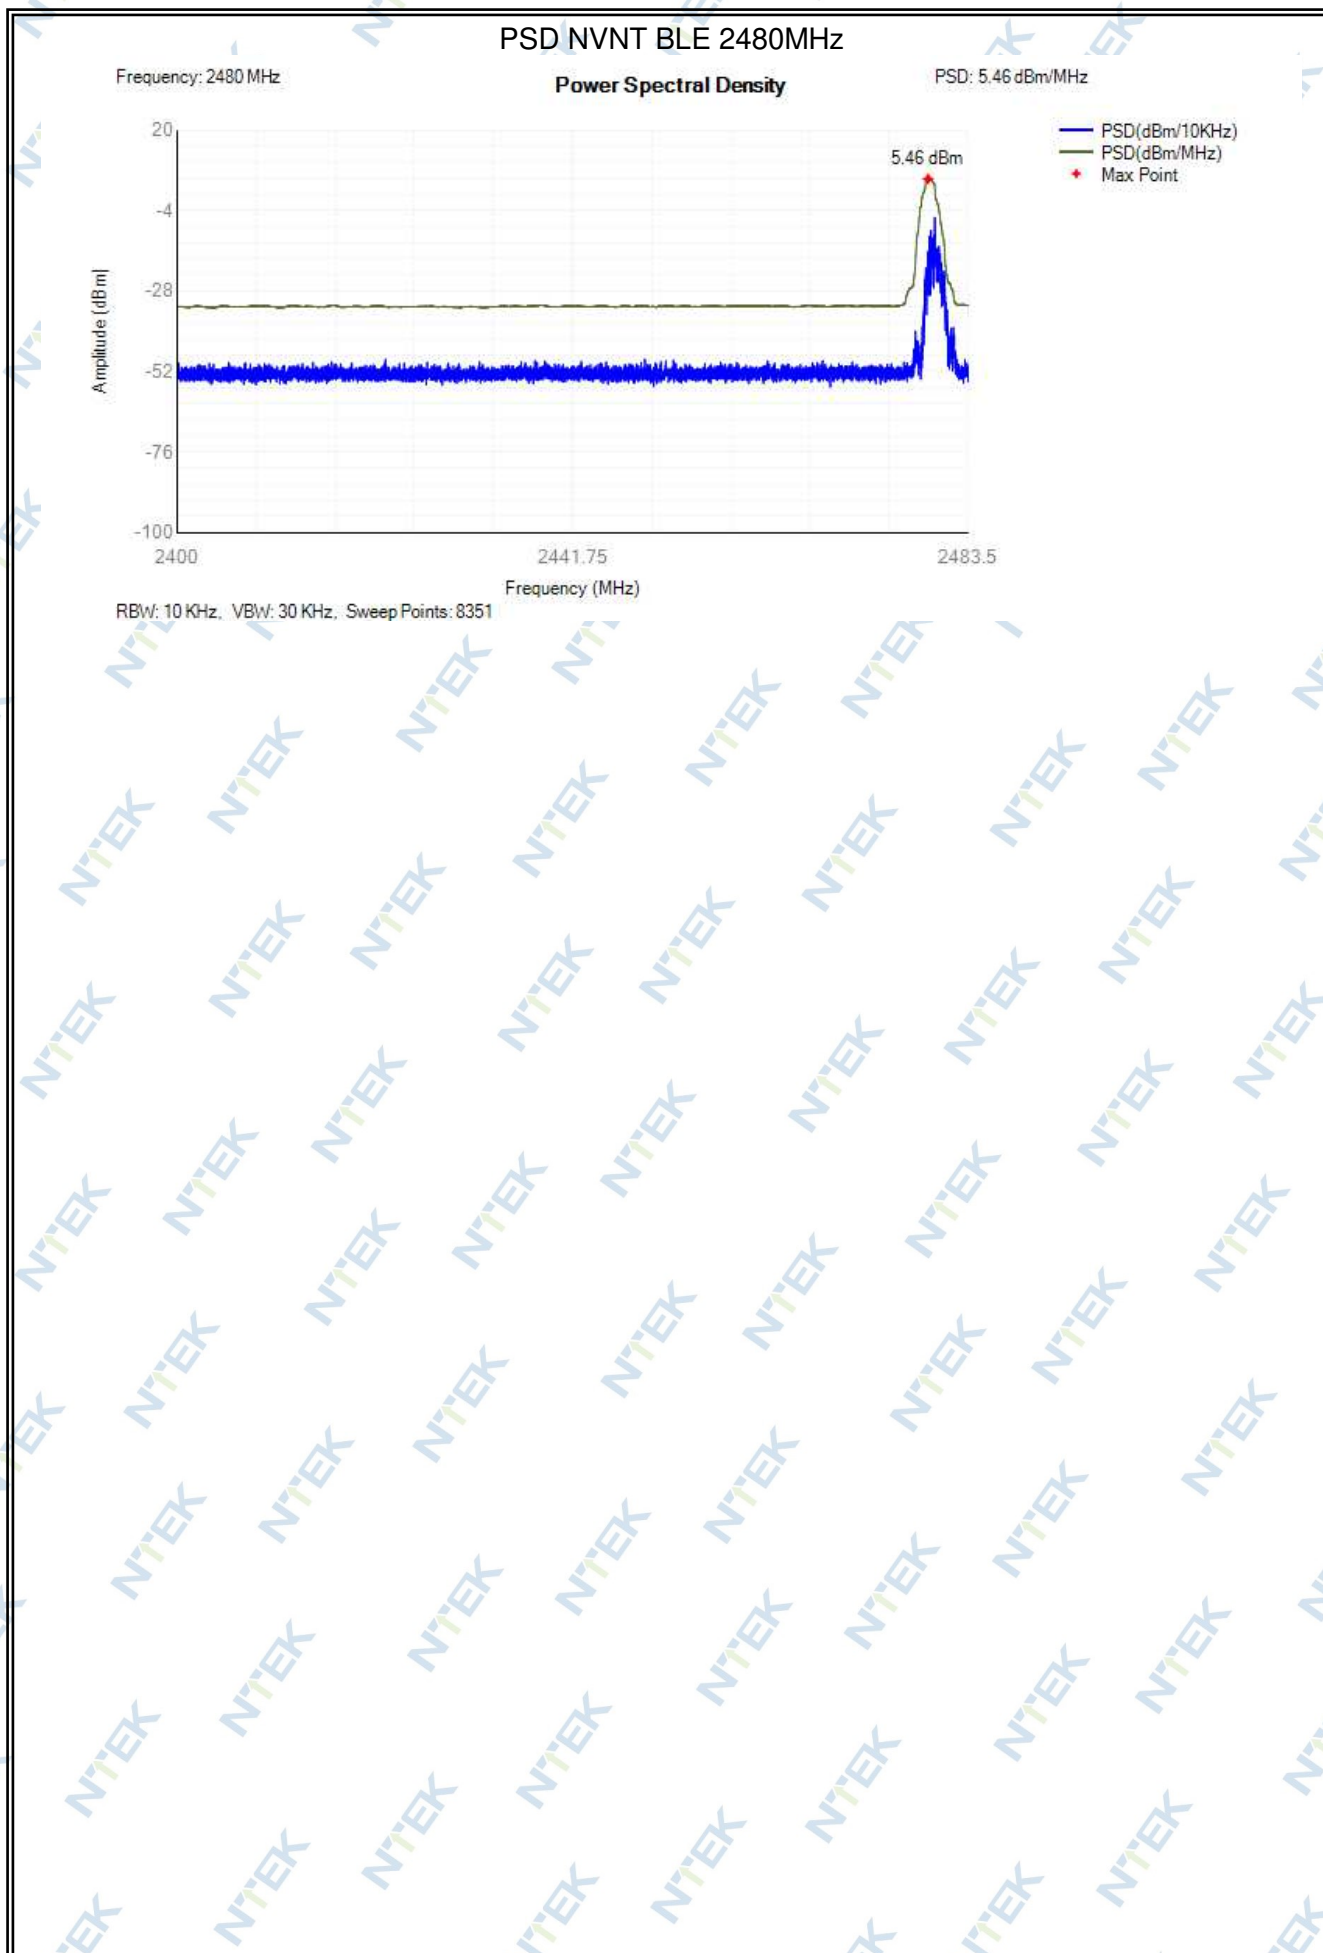

4.9 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	BLE	2402	2402	2.046	2400.977	2403.023	2400 - 2483.5MHz	Pass
NVNT	BLE	2440	2439.996	2.046	2438.973	2441.019	2400 - 2483.5MHz	Pass
NVNT	BLE	2480	2479.998	2.05	2478.973	2481.023	2400 - 2483.5MHz	Pass

OBW NVNT BLE 2402MHz

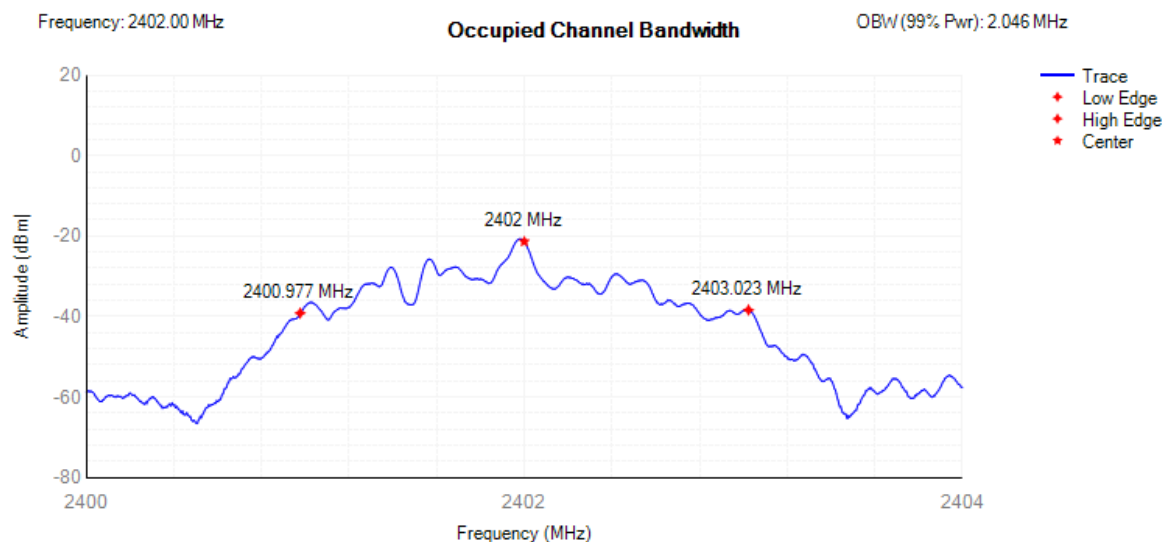

RBW: 50 KHz, VBW: 200 KHz, Sweep Points: 1001

OBW NVNT BLE 2440MHz

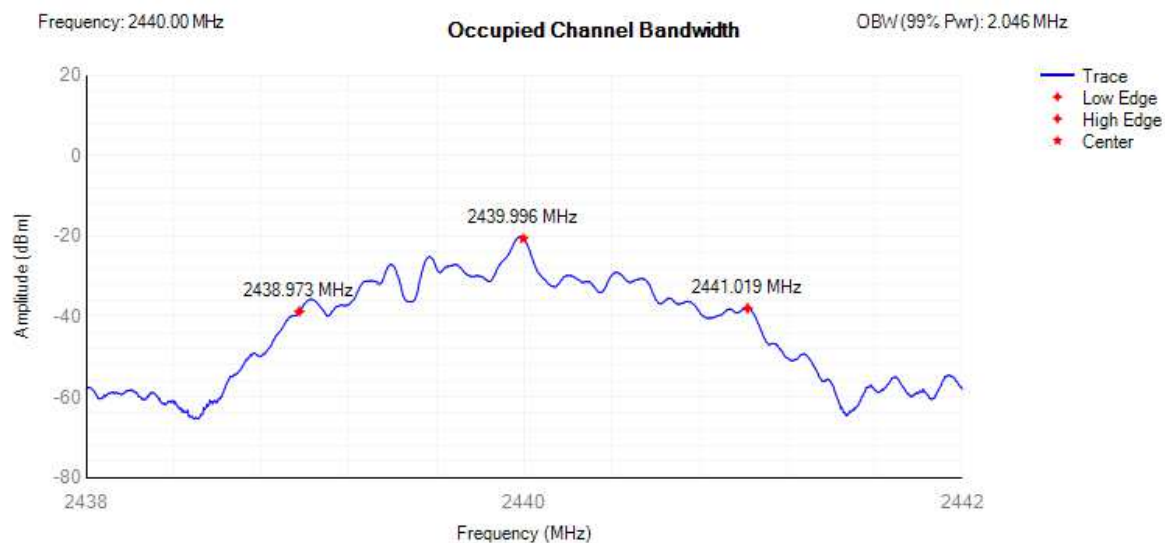


RBW: 50 KHz, VBW: 200 KHz, Sweep Points: 1001

OBW NVNT BLE 2480MHz

Frequency: 2480.00 MHz

Occupied Channel Bandwidth

OBW (99% Pwr): 2.050 MHz

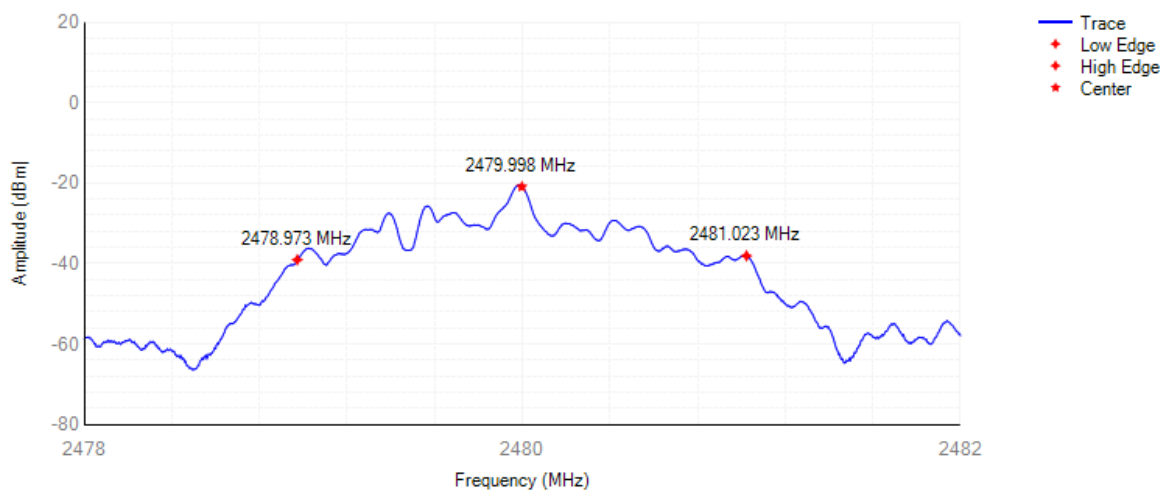


RBW: 50 KHz, VBW: 200 KHz, Sweep Points: 1001


4.10 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	2399.5	-62.67	-10	Pass
NVNT	BLE	2402	2398.5	-62.6	-10	Pass
NVNT	BLE	2402	2398.454	-62.97	-10	Pass
NVNT	BLE	2402	2397.454	-63.7	-20	Pass
NVNT	BLE	2402	2396.454	-63.94	-20	Pass
NVNT	BLE	2402	2396.408	-64.26	-20	Pass
NVNT	BLE	2480	2484	-62.62	-10	Pass
NVNT	BLE	2480	2485	-62.45	-10	Pass
NVNT	BLE	2480	2485.05	-63.26	-10	Pass
NVNT	BLE	2480	2486.05	-63.28	-20	Pass
NVNT	BLE	2480	2487.05	-62.36	-20	Pass
NVNT	BLE	2480	2487.1	-63.76	-20	Pass

Tx. Emissions OOB NVNT BLE 2402MHz

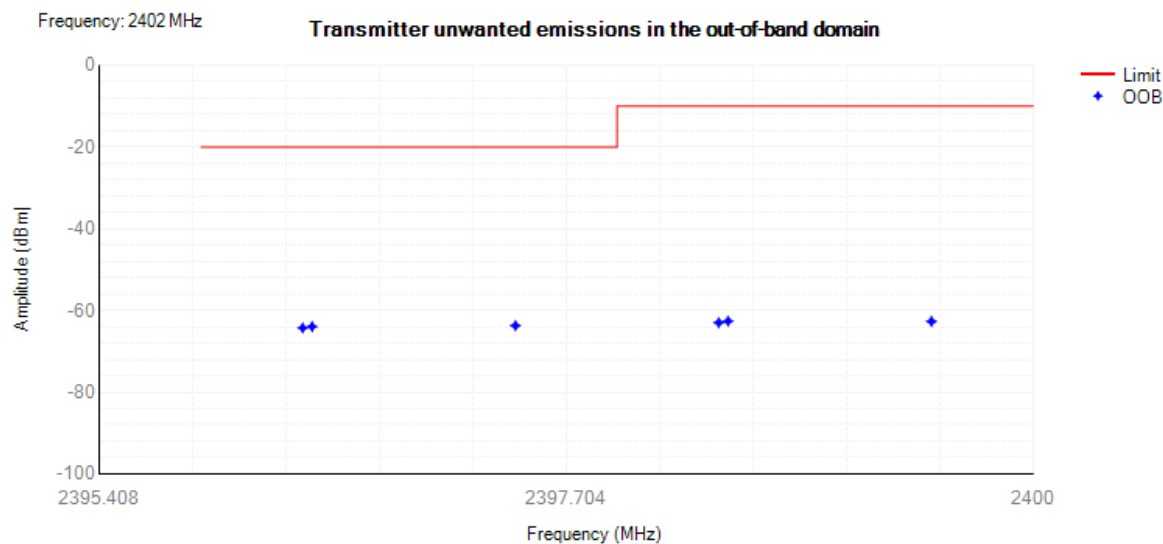

Tx. Emissions OOB NVNT BLE 2480MHz

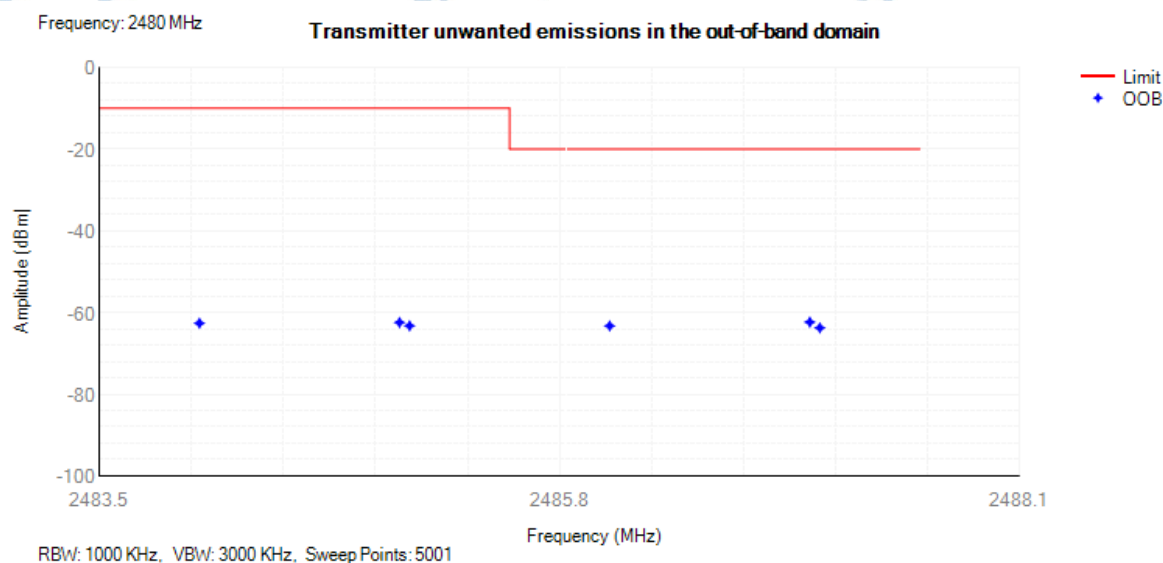


4.11 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -47 MHz	34.25	-66.36	NA	-36	Pass
NVNT	BLE	2402	47 MHz -74 MHz	67.75	-66.28	NA	-54	Pass
NVNT	BLE	2402	74 MHz -87.5 MHz	74.85	-66.51	NA	-36	Pass
NVNT	BLE	2402	87.5 MHz -118 MHz	108.2	-66.3	NA	-54	Pass
NVNT	BLE	2402	118 MHz -174 MHz	127.45	-65.15	NA	-36	Pass
NVNT	BLE	2402	174 MHz -230 MHz	202.45	-64.29	NA	-54	Pass
NVNT	BLE	2402	230 MHz -470 MHz	325.95	-64.92	NA	-36	Pass
NVNT	BLE	2402	470 MHz -694 MHz	604.5	-64.96	NA	-54	Pass
NVNT	BLE	2402	694 MHz -1000 MHz	939.9	-63.65	NA	-36	Pass
NVNT	BLE	2402	1000 MHz -2396 MHz	2395	-44.86	NA	-30	Pass
NVNT	BLE	2402	2487.5 MHz -12750 MHz	6589.5	-44.98	NA	-30	Pass
NVNT	BLE	2440	30 MHz -47 MHz	38.95	-66.72	NA	-36	Pass
NVNT	BLE	2440	47 MHz -74 MHz	65.7	-65.39	NA	-54	Pass
NVNT	BLE	2440	74 MHz -87.5 MHz	77.3	-66.41	NA	-36	Pass
NVNT	BLE	2440	87.5 MHz -118 MHz	109.4	-65.74	NA	-54	Pass
NVNT	BLE	2440	118 MHz -174 MHz	159.1	-65.9	NA	-36	Pass
NVNT	BLE	2440	174 MHz -230 MHz	193.95	-63.86	NA	-54	Pass
NVNT	BLE	2440	230 MHz -470 MHz	438.95	-64.86	NA	-36	Pass
NVNT	BLE	2440	470 MHz -694 MHz	628	-64.38	NA	-54	Pass
NVNT	BLE	2440	694 MHz -1000 MHz	828.8	-61.82	NA	-36	Pass
NVNT	BLE	2440	1000 MHz -2396 MHz	2311	-48.22	NA	-30	Pass
NVNT	BLE	2440	2487.5 MHz -12750 MHz	6933	-44.26	NA	-30	Pass
NVNT	BLE	2480	30 MHz -47 MHz	40.35	-66.32	NA	-36	Pass
NVNT	BLE	2480	47 MHz -74 MHz	66.55	-66.58	NA	-54	Pass
NVNT	BLE	2480	74 MHz -87.5 MHz	79.35	-65.93	NA	-36	Pass
NVNT	BLE	2480	87.5 MHz -118 MHz	100.35	-66.33	NA	-54	Pass
NVNT	BLE	2480	118 MHz -174 MHz	162	-65.17	NA	-36	Pass
NVNT	BLE	2480	174 MHz -230 MHz	202.2	-64.73	NA	-54	Pass
NVNT	BLE	2480	230 MHz -470 MHz	267.5	-64.71	NA	-36	Pass
NVNT	BLE	2480	470 MHz -694 MHz	515.75	-64.82	NA	-54	Pass
NVNT	BLE	2480	694 MHz -1000 MHz	983.75	-64.05	NA	-36	Pass
NVNT	BLE	2480	1000 MHz -2396 MHz	2352.5	-50.17	NA	-30	Pass
NVNT	BLE	2480	2487.5 MHz -12750 MHz	6938.5	-44.1	NA	-30	Pass

Tx. Spurious NVNT BLE 2402MHz

Frequency: 2402 MHz


Transmitter unwanted emissions in the spurious domain

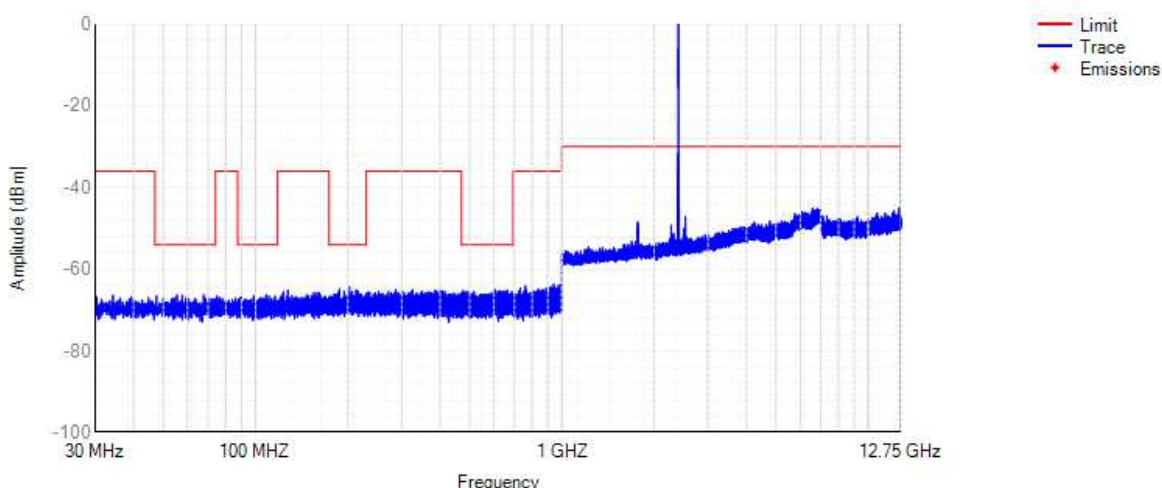

Tx. Spurious NVNT BLE 2440MHz

Frequency: 2440 MHz


Transmitter unwanted emissions in the spurious domain

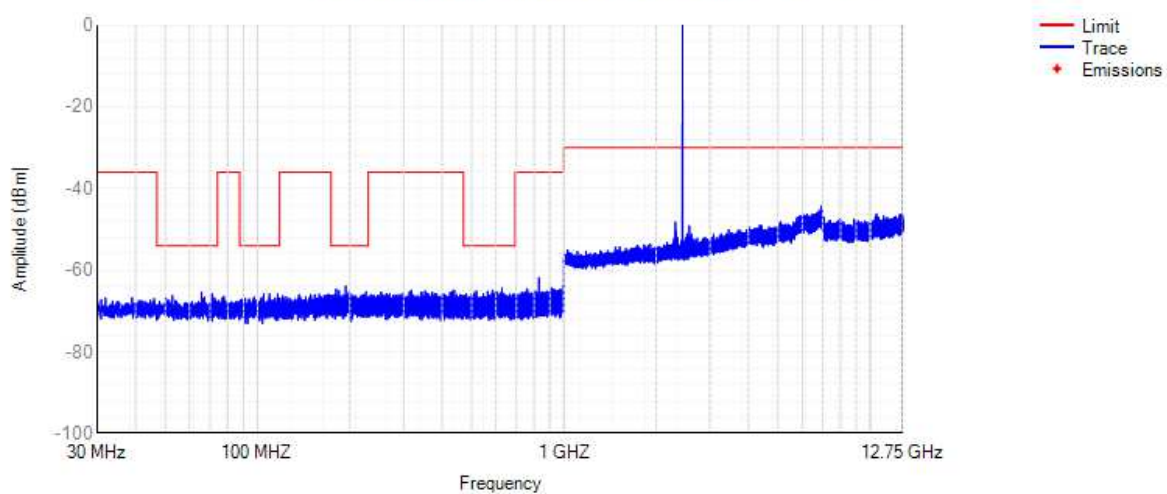

Tx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz


Transmitter unwanted emissions in the spurious domain

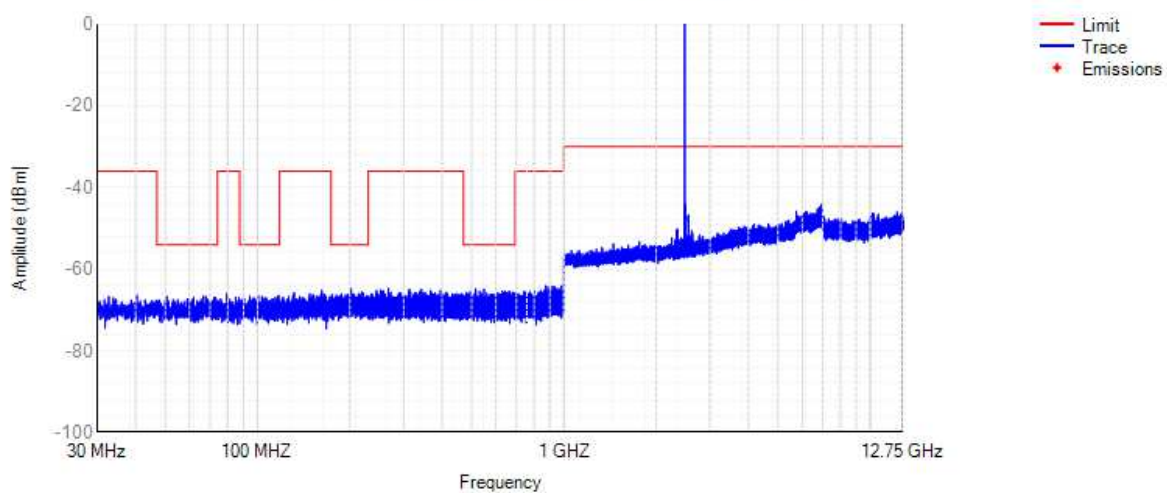


4.12 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -1000 MHz	335.25	-74.59	NA	-57	Pass
NVNT	BLE	2402	1000 MHz -12750 MHz	6860	-55.96	NA	-47	Pass
NVNT	BLE	2440	30 MHz -1000 MHz	944.3	-73.34	NA	-57	Pass
NVNT	BLE	2440	1000 MHz -12750 MHz	6834	-54.84	NA	-47	Pass
NVNT	BLE	2480	30 MHz -1000 MHz	986.75	-73.76	NA	-57	Pass
NVNT	BLE	2480	1000 MHz -12750 MHz	1778.5	-49.9	-70.15	-47	Pass

Rx. Spurious NVNT BLE 2402MHz

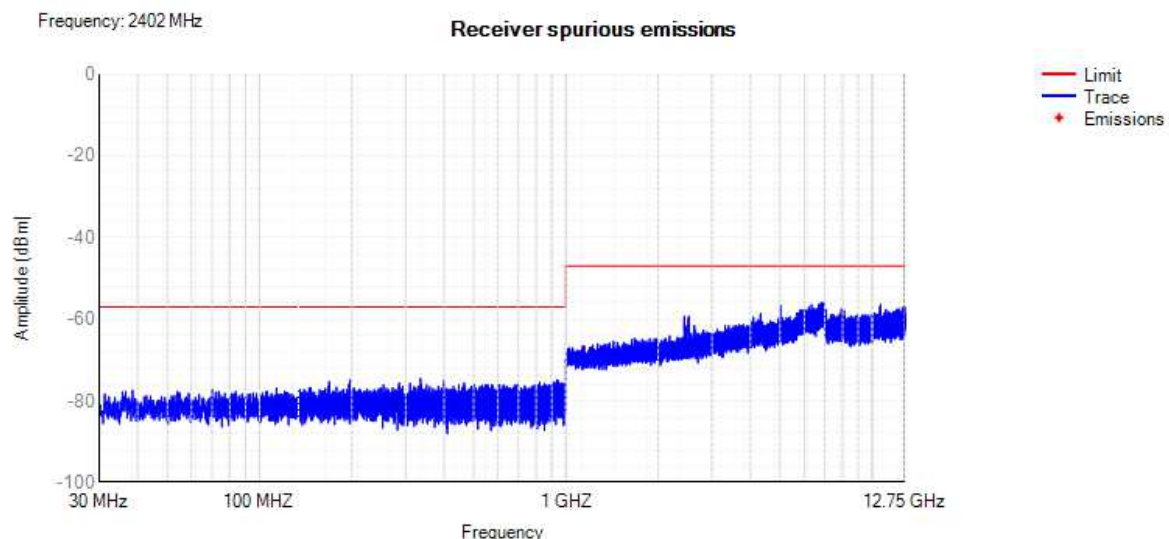


Rx. Spurious NVNT BLE 2440MHz

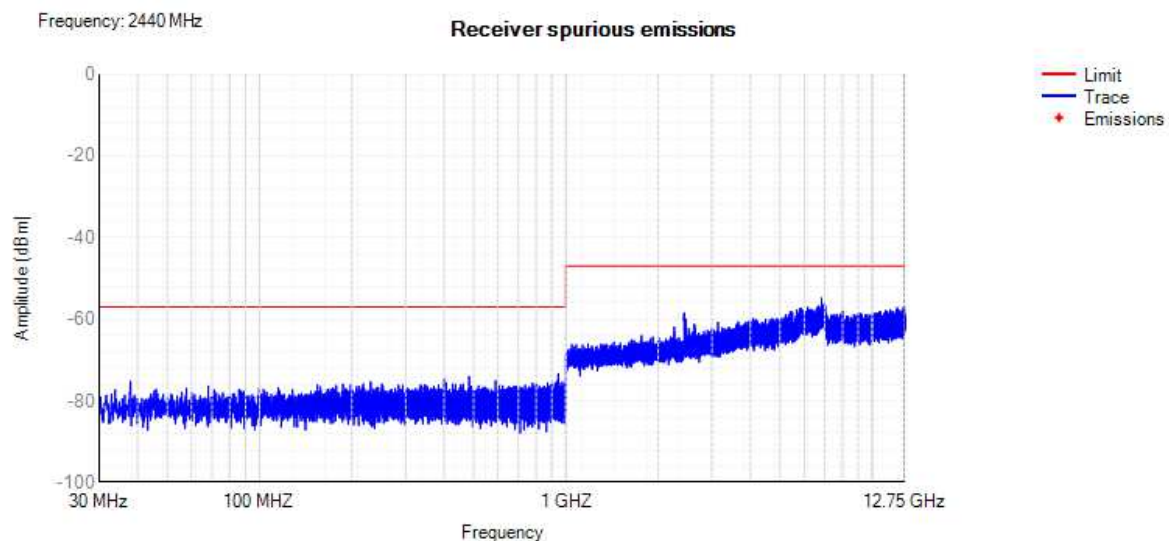

Rx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz

Receiver spurious emissions

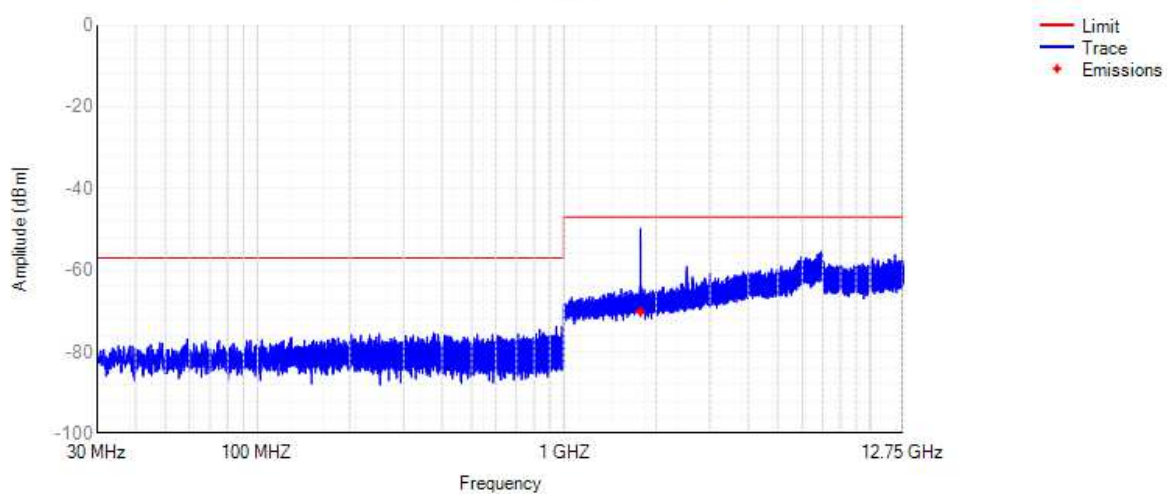


Module 2

1M


4.1 RF Output Power

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	-1.29	240	3.71	20	Pass
NVNT	BLE	2440	-1.04	240	3.96	20	Pass
NVNT	BLE	2480	-0.76	240	4.24	20	Pass
NVLT	BLE	2402	-2.14	240	2.86	20	Pass
NVLT	BLE	2440	-1.82	240	3.18	20	Pass
NVLT	BLE	2480	-1.3	240	3.7	20	Pass
NVHT	BLE	2402	-2.2	240	2.8	20	Pass
NVHT	BLE	2440	-1.72	240	3.28	20	Pass
NVHT	BLE	2480	-1.1	240	3.9	20	Pass


Power NVNT BLE 2402MHz

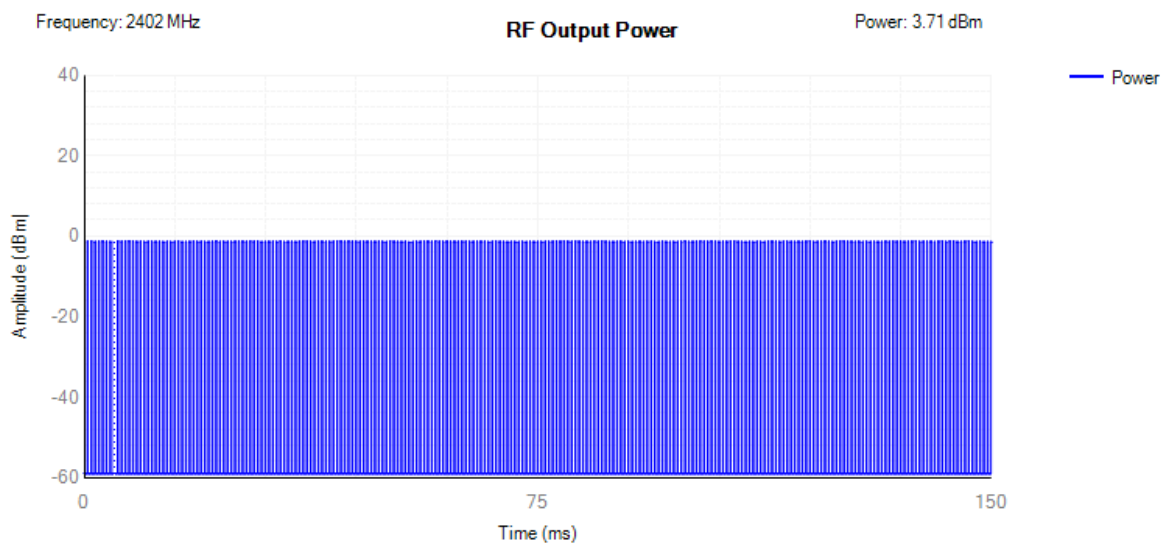

Power NVNT BLE 2440MHz

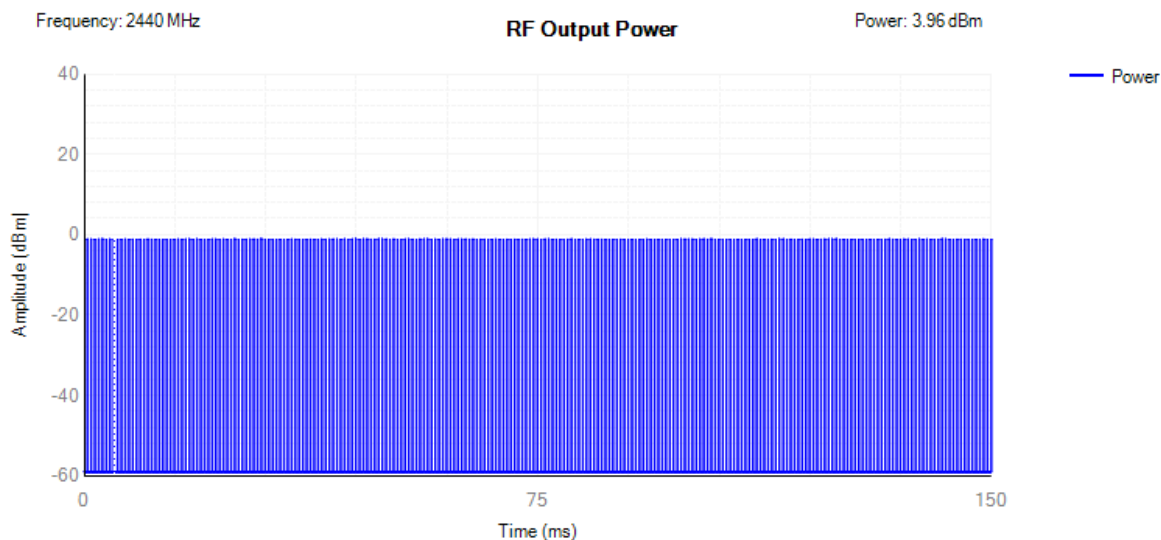


Power NVNT BLE 2480MHz

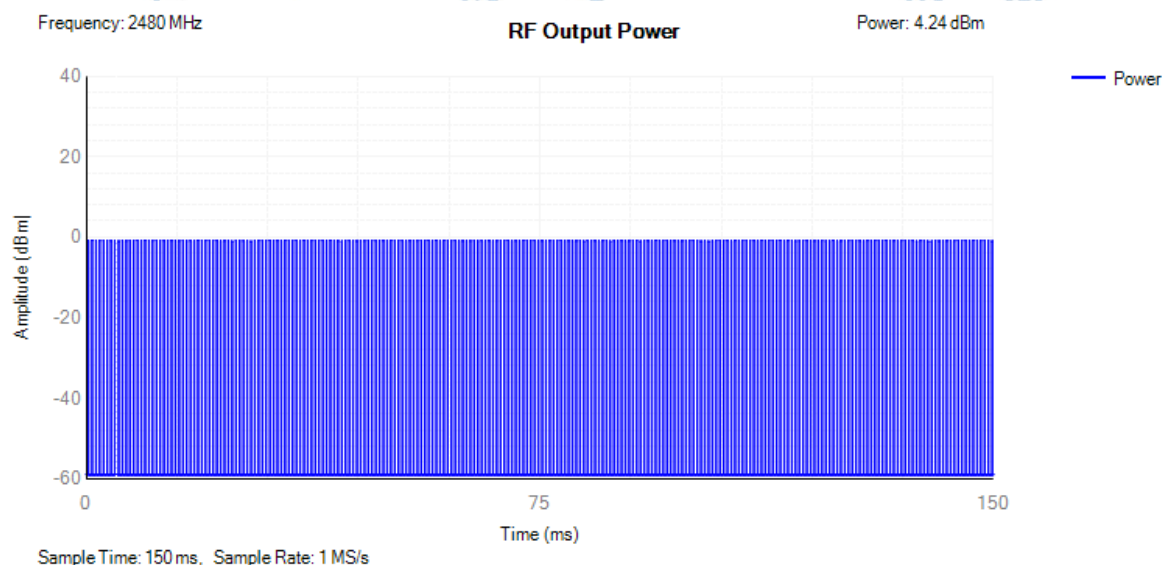


4.2 Power Spectral Density


Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	3.59	10	Pass
NVNT	BLE	2440	3.85	10	Pass
NVNT	BLE	2480	4.14	10	Pass

PSD NVNT BLE 2402MHz

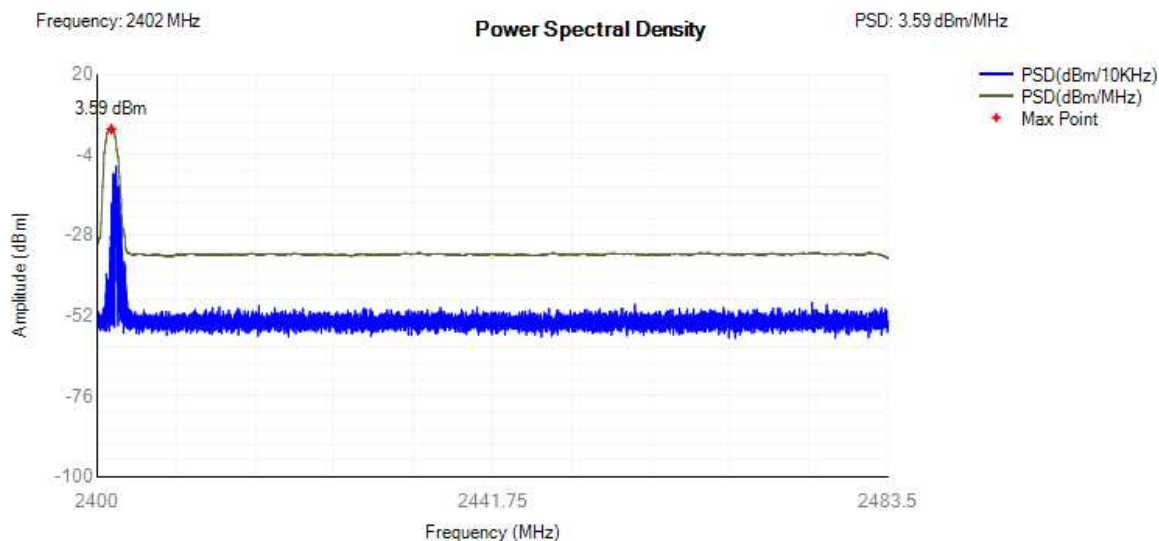

PSD NVNT BLE 2440MHz

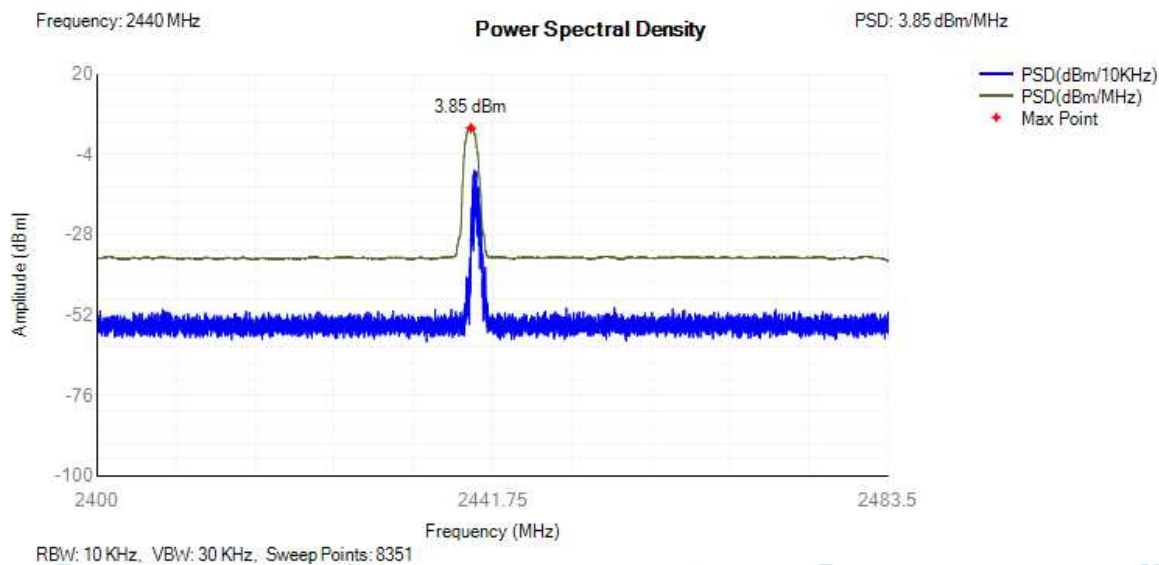


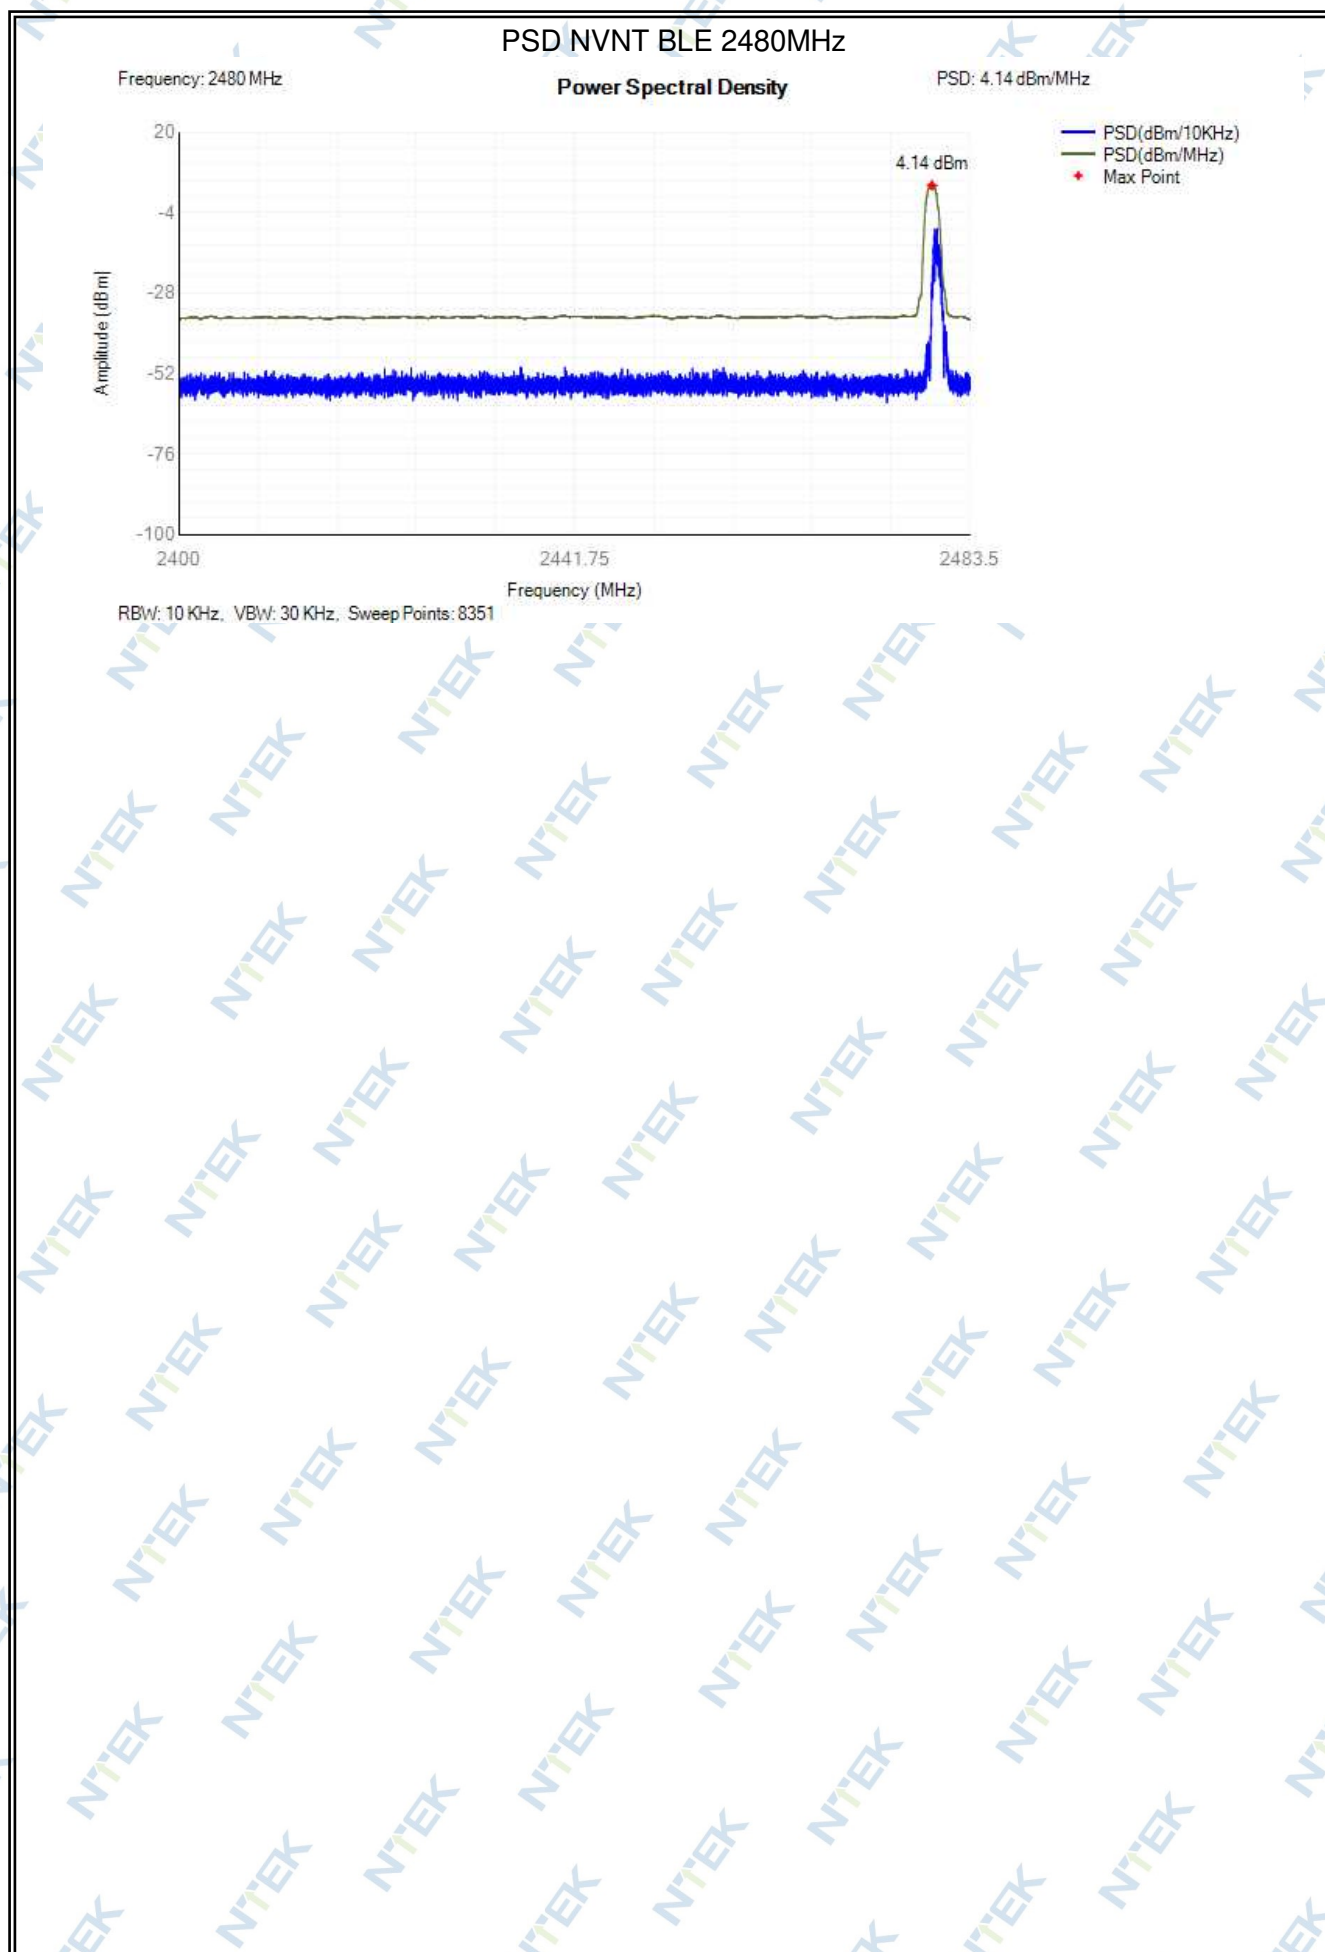

4.3 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	BLE	2402	2402.005	1.025	2401.493	2402.517	2400 - 2483.5MHz	Pass
NVNT	BLE	2440	2440.004	1.027	2439.491	2440.517	2400 - 2483.5MHz	Pass
NVNT	BLE	2480	2480.004	1.027	2479.491	2480.517	2400 - 2483.5MHz	Pass

OBW NVNT BLE 2402MHz

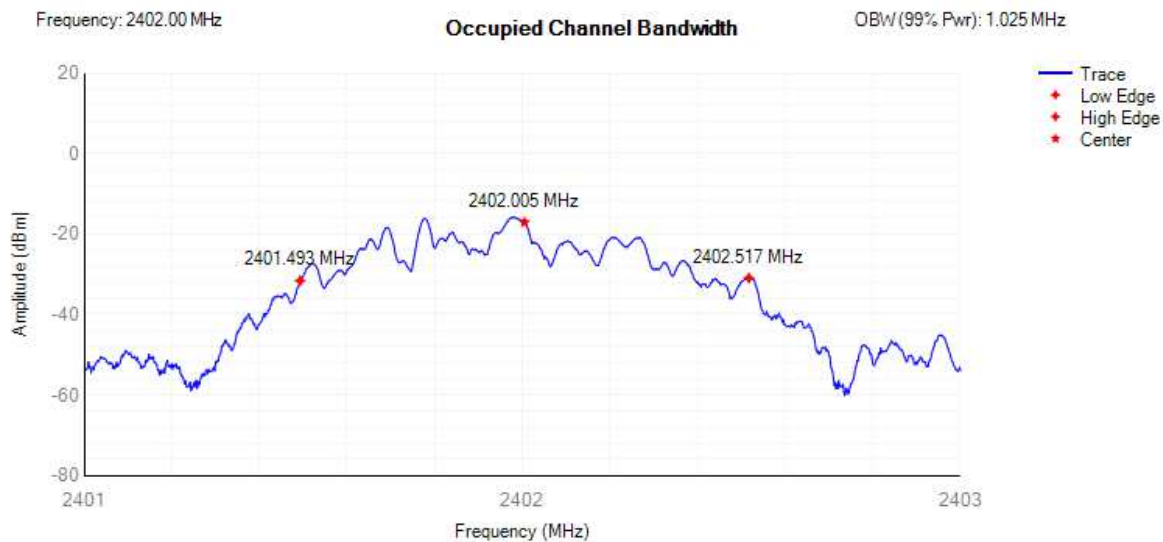

RBW: 20 KHz, VBW: 100 KHz, Sweep Points: 1001

OBW NVNT BLE 2440MHz

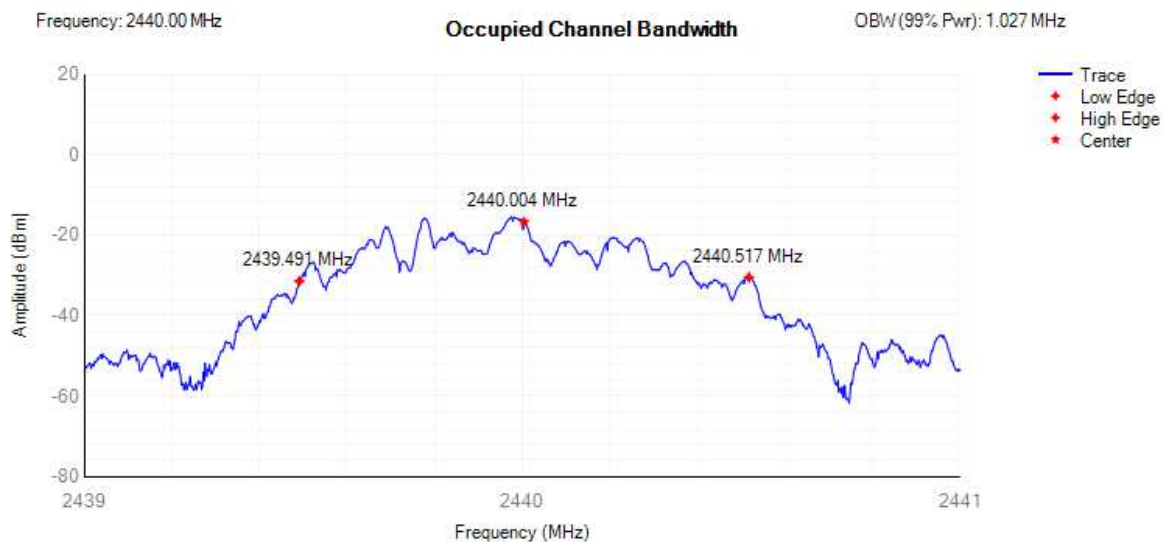


RBW: 20 KHz, VBW: 100 KHz, Sweep Points: 1001

OBW NVNT BLE 2480MHz

Frequency: 2480.00 MHz

Occupied Channel Bandwidth

OBW (99% Pwr): 1.027 MHz

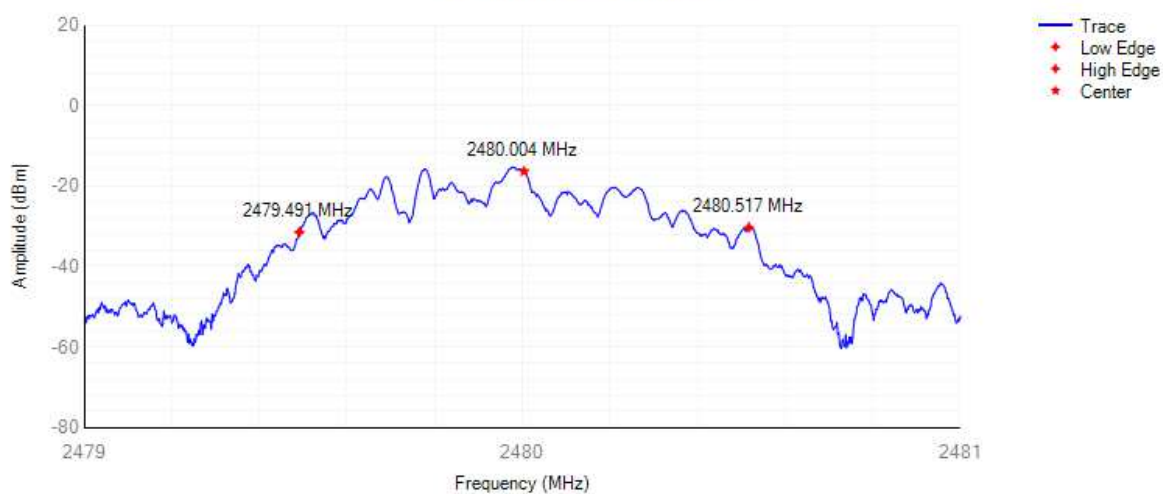


RBW: 20 KHz, VBW: 100 KHz, Sweep Points: 1001


4.4 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	2399.5	-63.5	-10	Pass
NVNT	BLE	2402	2399.475	-53.86	-10	Pass
NVNT	BLE	2402	2398.475	-61.31	-20	Pass
NVNT	BLE	2402	2398.45	-63.3	-20	Pass
NVNT	BLE	2480	2484	-63.38	-10	Pass
NVNT	BLE	2480	2484.027	-57.52	-10	Pass
NVNT	BLE	2480	2485.027	-63.08	-20	Pass
NVNT	BLE	2480	2485.054	-58.24	-20	Pass

Tx. Emissions OOB NVNT BLE 2402MHz

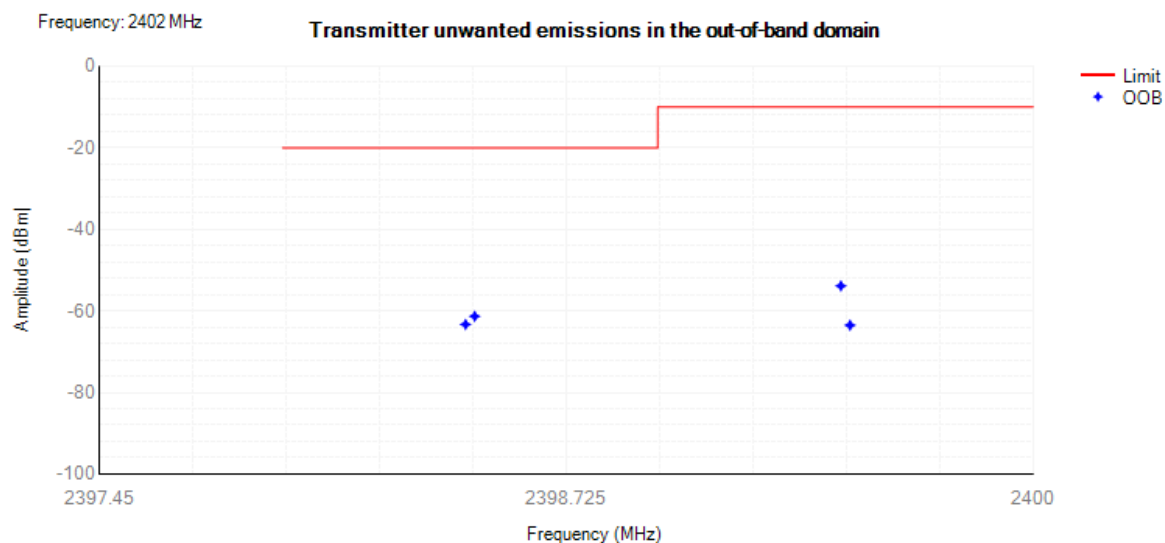

Tx. Emissions OOB NVNT BLE 2480MHz

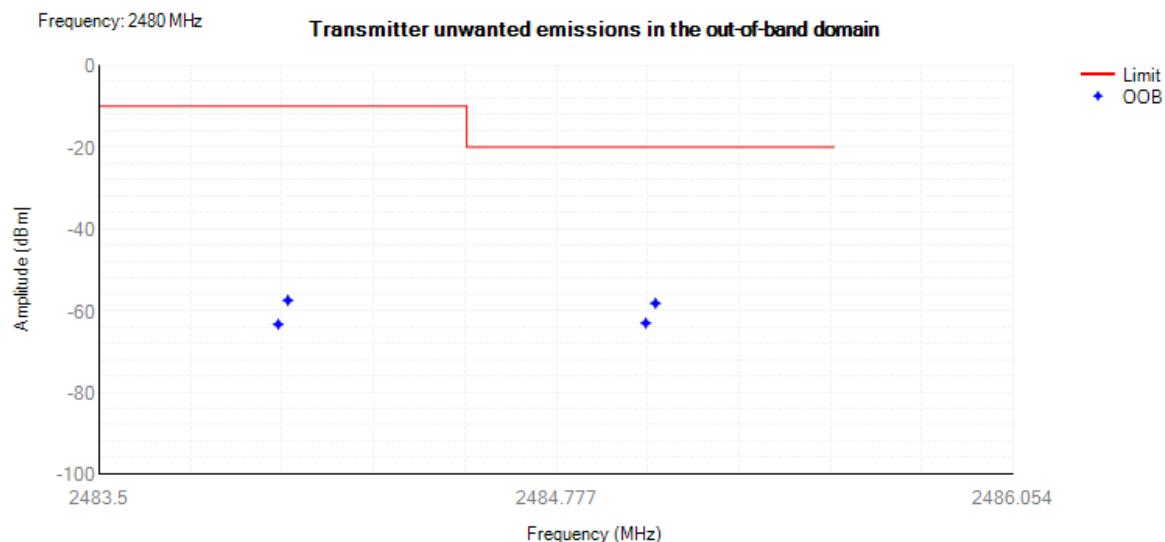


4.5 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -47 MHz	40.5	-66.38	NA	-36	Pass
NVNT	BLE	2402	47 MHz -74 MHz	51.85	-66.18	NA	-54	Pass
NVNT	BLE	2402	74 MHz -87.5 MHz	80.55	-66.75	NA	-36	Pass
NVNT	BLE	2402	87.5 MHz -118 MHz	113.1	-66.31	NA	-54	Pass
NVNT	BLE	2402	118 MHz -174 MHz	163.3	-65.45	NA	-36	Pass
NVNT	BLE	2402	174 MHz -230 MHz	205.7	-65.23	NA	-54	Pass
NVNT	BLE	2402	230 MHz -470 MHz	343.3	-64.21	NA	-36	Pass
NVNT	BLE	2402	470 MHz -694 MHz	581.05	-64.83	NA	-54	Pass
NVNT	BLE	2402	694 MHz -1000 MHz	904.15	-64.13	NA	-36	Pass
NVNT	BLE	2402	1000 MHz -2398 MHz	2396	-47.83	NA	-30	Pass
NVNT	BLE	2402	2485.5 MHz -12750 MHz	6998.5	-44.99	NA	-30	Pass
NVNT	BLE	2440	30 MHz -47 MHz	35.65	-66.65	NA	-36	Pass
NVNT	BLE	2440	47 MHz -74 MHz	57	-65.91	NA	-54	Pass
NVNT	BLE	2440	74 MHz -87.5 MHz	79.35	-65.49	NA	-36	Pass
NVNT	BLE	2440	87.5 MHz -118 MHz	109.55	-65.71	NA	-54	Pass
NVNT	BLE	2440	118 MHz -174 MHz	169.6	-66.08	NA	-36	Pass
NVNT	BLE	2440	174 MHz -230 MHz	213.55	-64.97	NA	-54	Pass
NVNT	BLE	2440	230 MHz -470 MHz	435.15	-64.12	NA	-36	Pass
NVNT	BLE	2440	470 MHz -694 MHz	536.85	-64.55	NA	-54	Pass
NVNT	BLE	2440	694 MHz -1000 MHz	950	-64.3	NA	-36	Pass
NVNT	BLE	2440	1000 MHz -2398 MHz	2312	-46.58	NA	-30	Pass
NVNT	BLE	2440	2485.5 MHz -12750 MHz	6974	-44.41	NA	-30	Pass
NVNT	BLE	2480	30 MHz -47 MHz	35.95	-66.63	NA	-36	Pass
NVNT	BLE	2480	47 MHz -74 MHz	72.2	-66.51	NA	-54	Pass
NVNT	BLE	2480	74 MHz -87.5 MHz	80.85	-66.9	NA	-36	Pass
NVNT	BLE	2480	87.5 MHz -118 MHz	100.2	-65.92	NA	-54	Pass
NVNT	BLE	2480	118 MHz -174 MHz	128.25	-65.3	NA	-36	Pass
NVNT	BLE	2480	174 MHz -230 MHz	200.4	-64.74	NA	-54	Pass
NVNT	BLE	2480	230 MHz -470 MHz	302.7	-64.9	NA	-36	Pass
NVNT	BLE	2480	470 MHz -694 MHz	484.85	-64.36	NA	-54	Pass
NVNT	BLE	2480	694 MHz -1000 MHz	734.8	-63.92	NA	-36	Pass
NVNT	BLE	2480	1000 MHz -2398 MHz	2351.5	-47.63	NA	-30	Pass
NVNT	BLE	2480	2485.5 MHz -12750 MHz	6872.5	-44.8	NA	-30	Pass

Tx. Spurious NVNT BLE 2402MHz

Frequency: 2402 MHz


Transmitter unwanted emissions in the spurious domain

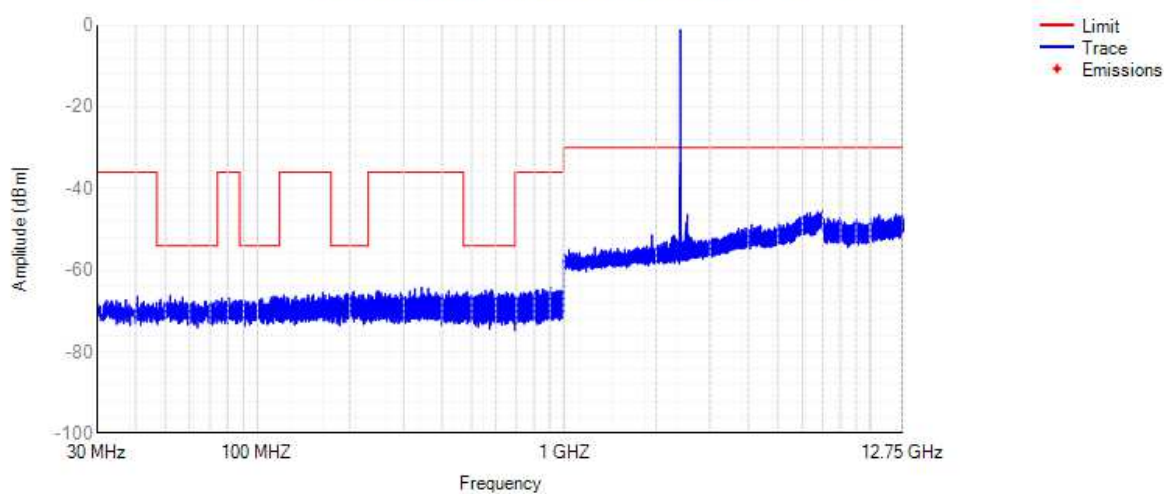

Tx. Spurious NVNT BLE 2440MHz

Frequency: 2440 MHz


Transmitter unwanted emissions in the spurious domain

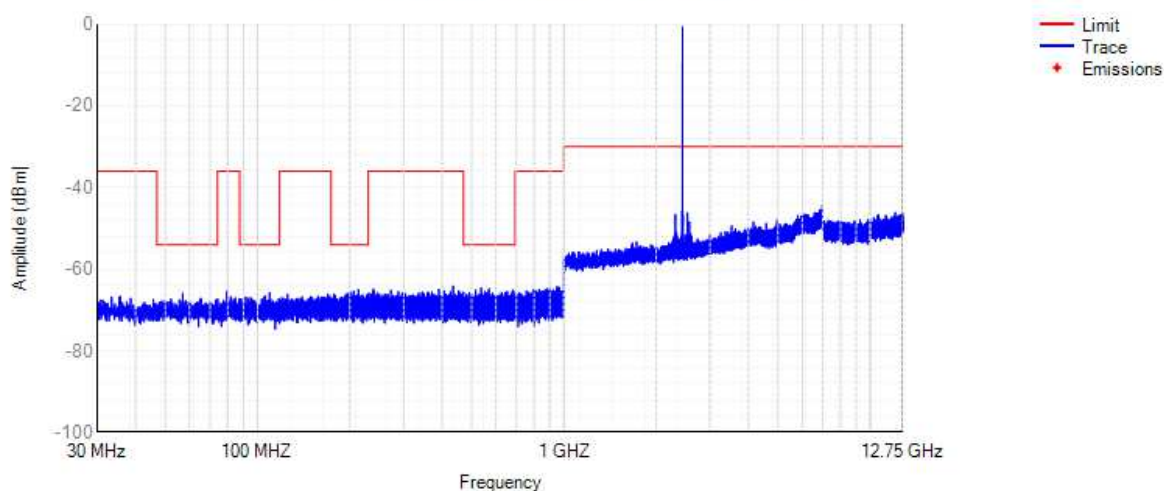

Tx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz


Transmitter unwanted emissions in the spurious domain

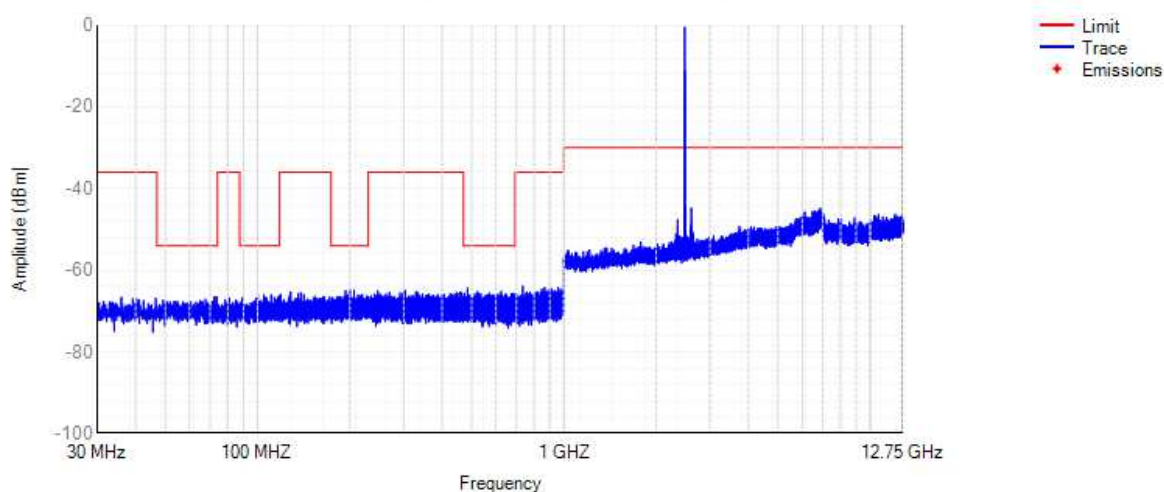


4.6 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -1000 MHz	340.885	-74.26	NA	-57	Pass
NVNT	BLE	2402	1000 MHz -12750 MHz	1921.5	-55.1	NA	-47	Pass
NVNT	BLE	2440	30 MHz -1000 MHz	382.8	-73.49	NA	-57	Pass
NVNT	BLE	2440	1000 MHz -12750 MHz	6993	-53.18	NA	-47	Pass
NVNT	BLE	2480	30 MHz -1000 MHz	974.8	-74.08	NA	-57	Pass
NVNT	BLE	2480	1000 MHz -12750 MHz	6841	-54.24	NA	-47	Pass

Rx. Spurious NVNT BLE 2402MHz

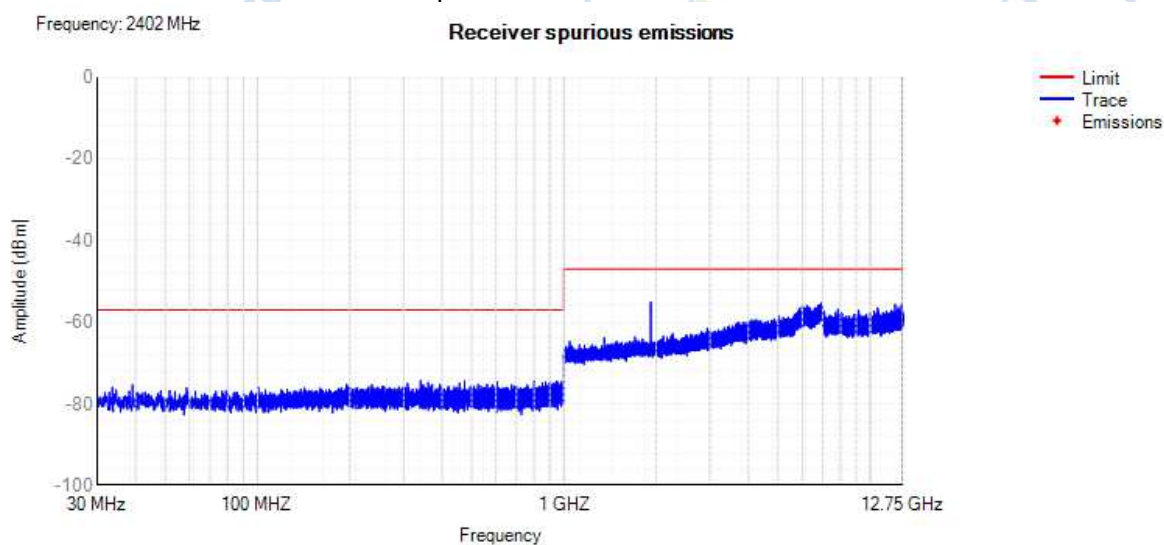


Rx. Spurious NVNT BLE 2440MHz

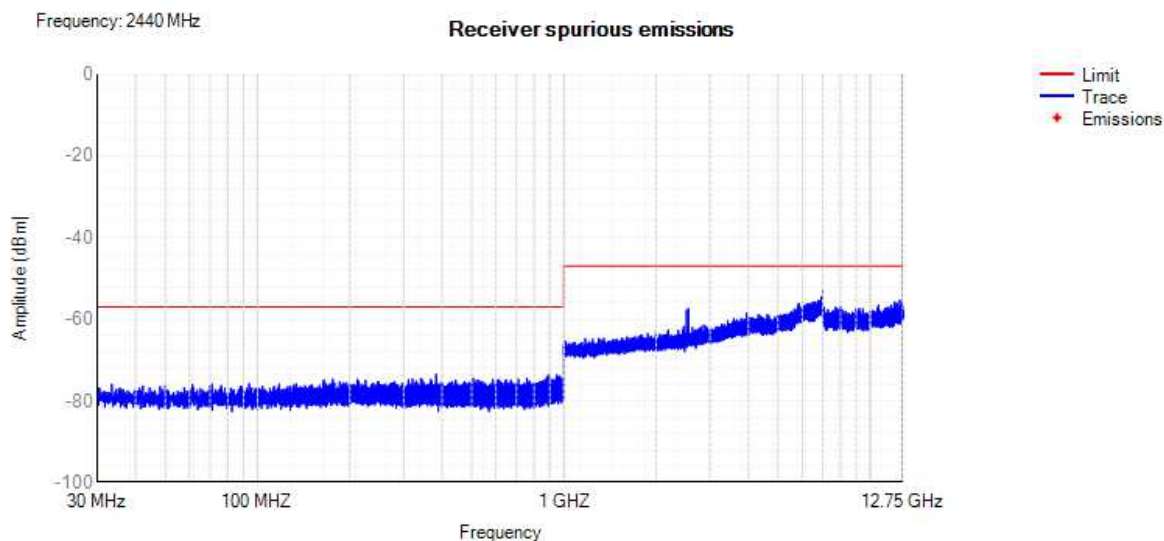

Rx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz

Receiver spurious emissions

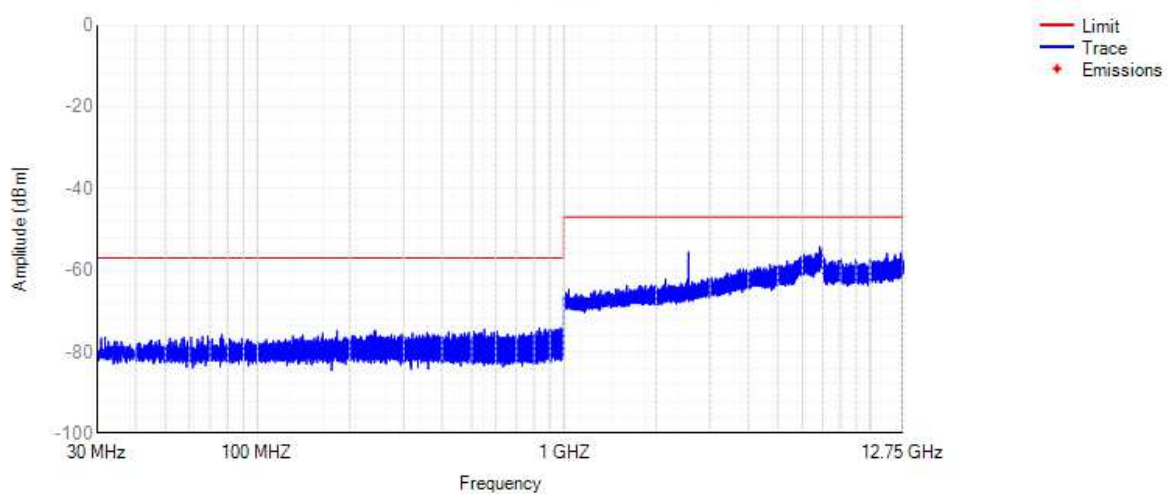


Module 2

2M


4.7 RF Output Power

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	-2.34	160	2.66	20	Pass
NVNT	BLE	2440	-0.72	160	4.28	20	Pass
NVNT	BLE	2480	-0.91	160	4.09	20	Pass
NVLT	BLE	2402	-3.19	160	1.81	20	Pass
NVLT	BLE	2440	-1.5	160	3.5	20	Pass
NVLT	BLE	2480	-1.45	160	3.55	20	Pass
NVHT	BLE	2402	-3.25	160	1.75	20	Pass
NVHT	BLE	2440	-1.4	160	3.6	20	Pass
NVHT	BLE	2480	-1.25	160	3.75	20	Pass


Power NVNT BLE 2402MHz

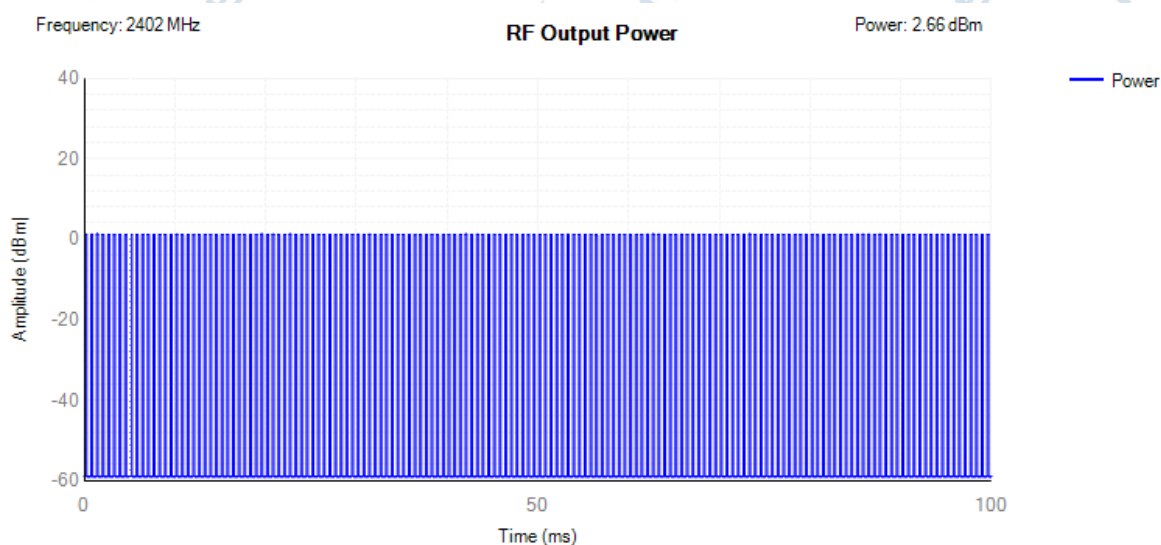

Power NVNT BLE 2440MHz

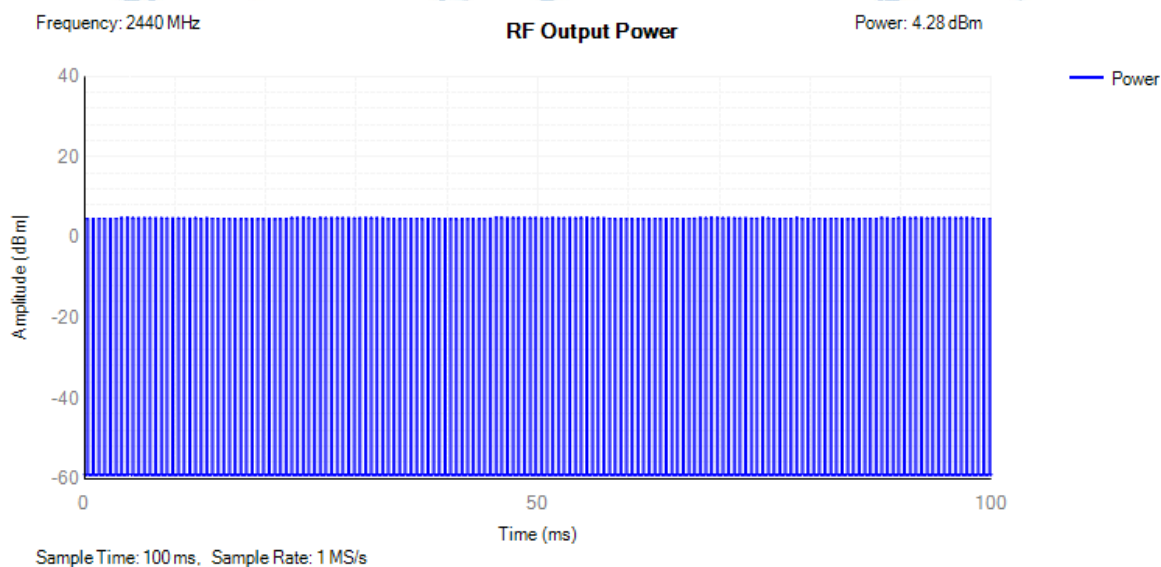


Power NVNT BLE 2480MHz

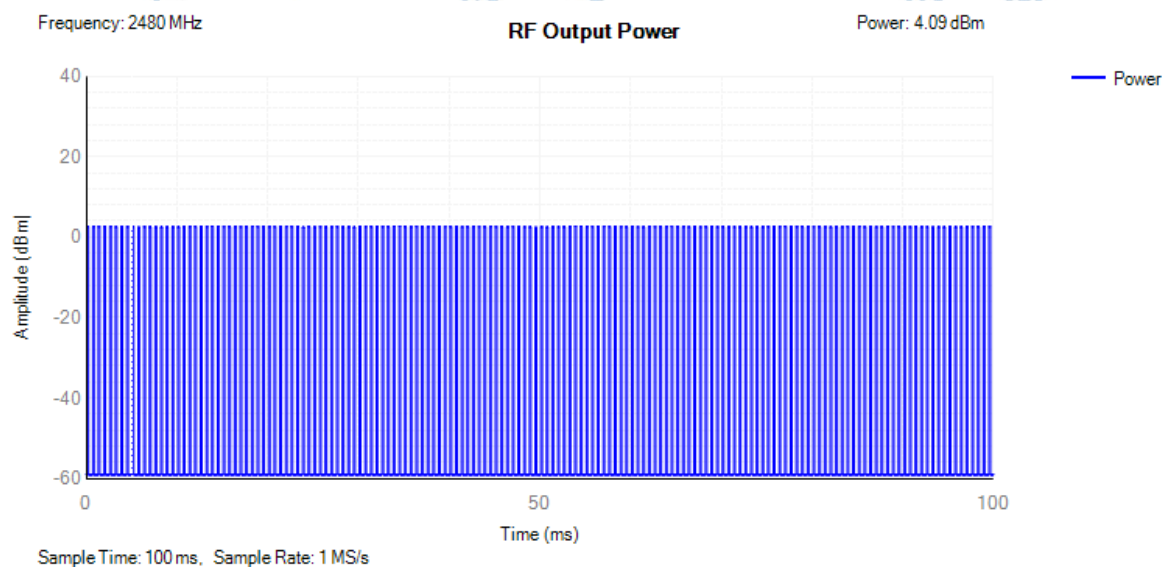


4.8 Power Spectral Density


Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	1.55	10	Pass
NVNT	BLE	2440	3.21	10	Pass
NVNT	BLE	2480	3.02	10	Pass

PSD NVNT BLE 2402MHz

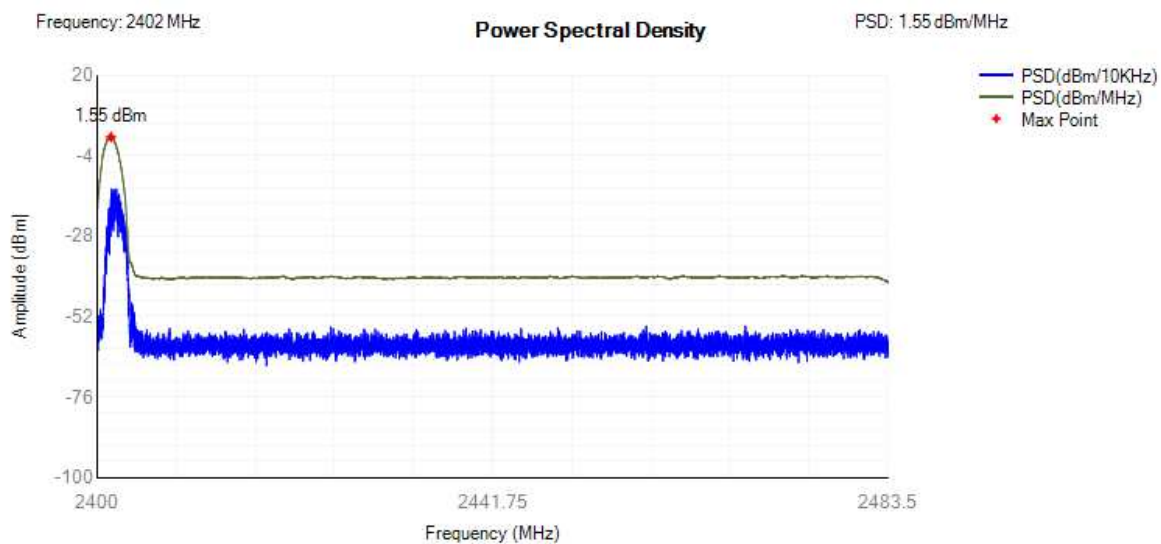

PSD NVNT BLE 2440MHz

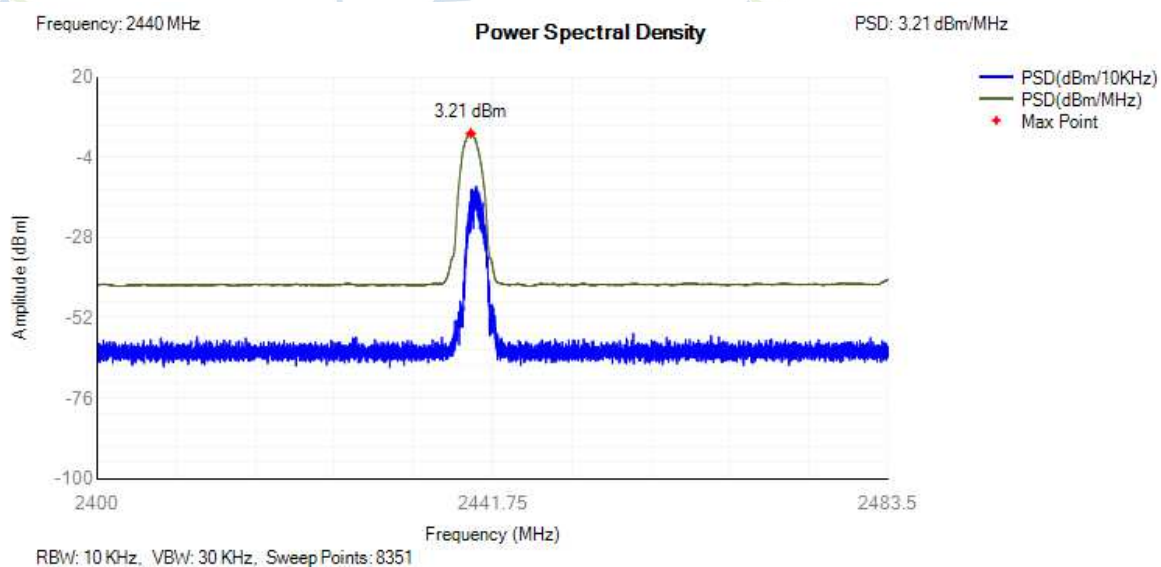


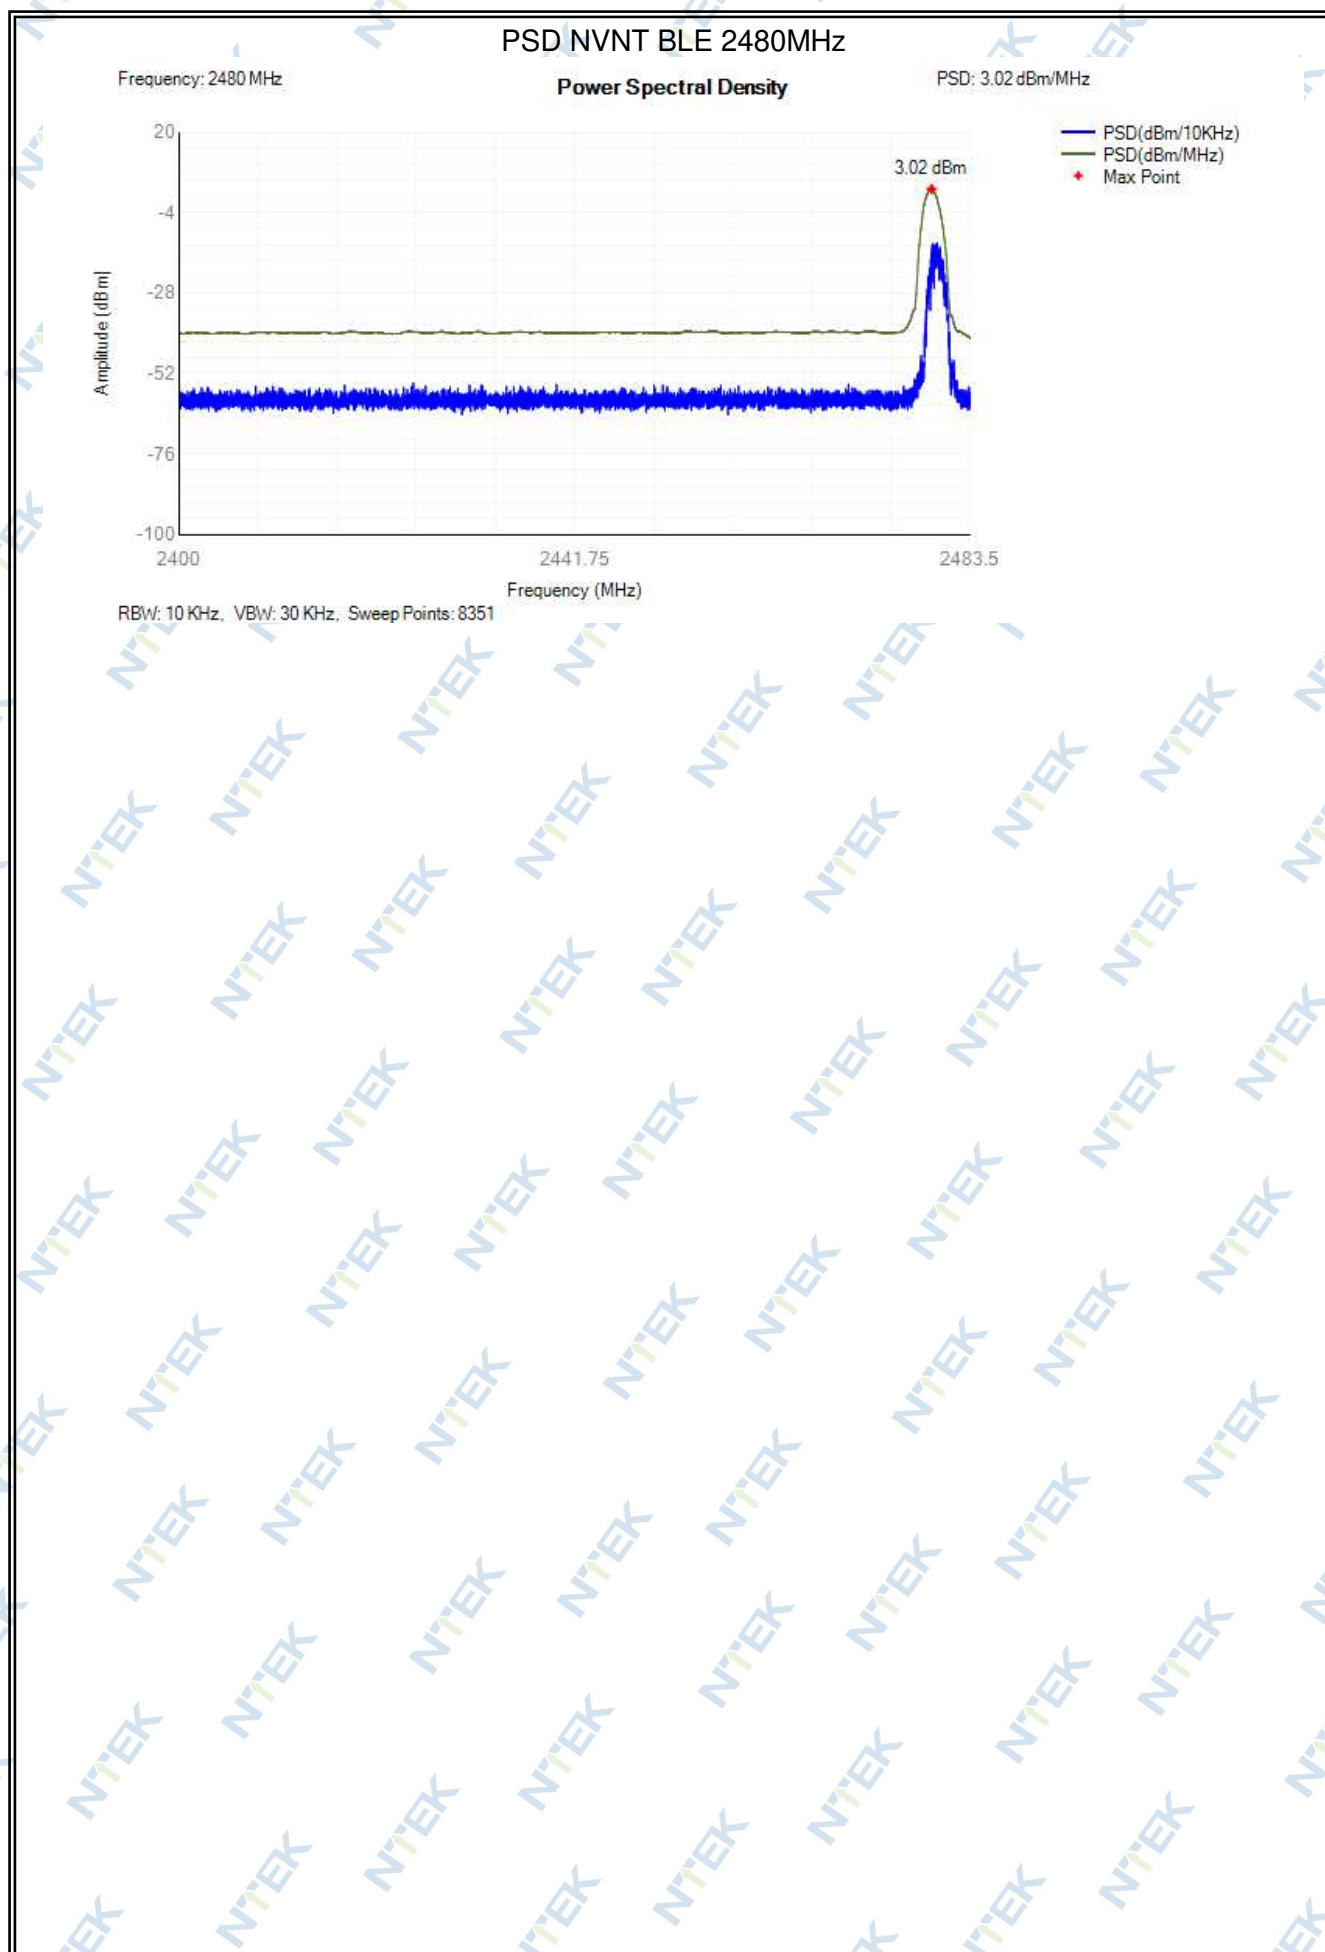


4.9 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	BLE	2402	2402.002	2.074	2400.965	2403.039	2400 - 2483.5MHz	Pass
NVNT	BLE	2440	2440.002	2.074	2438.965	2441.039	2400 - 2483.5MHz	Pass
NVNT	BLE	2480	2480	2.086	2478.957	2481.043	2400 - 2483.5MHz	Pass


OBW NVNT BLE 2402MHz

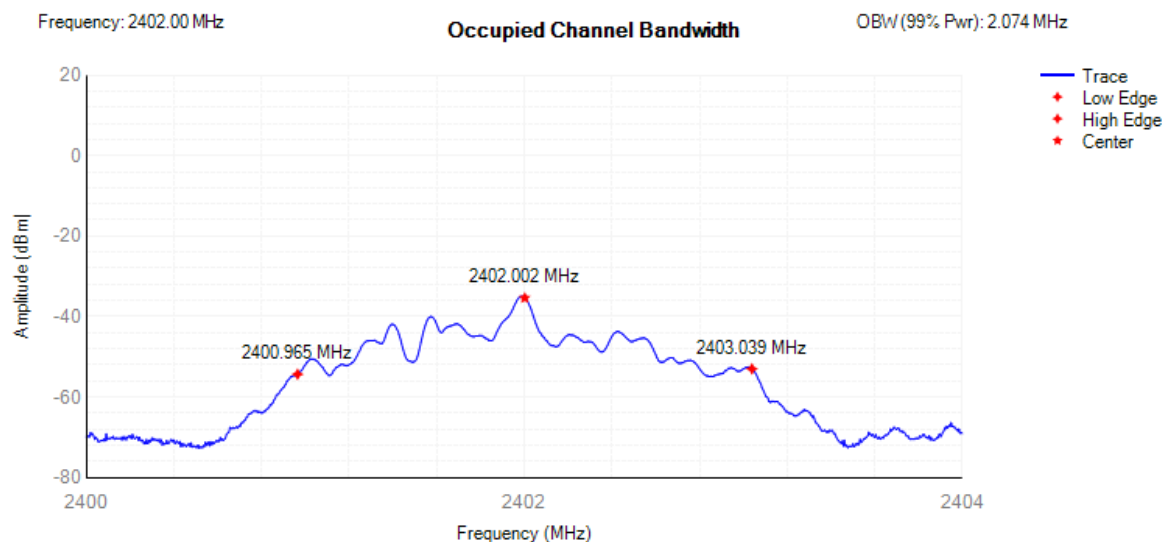

OBW NVNT BLE 2440MHz

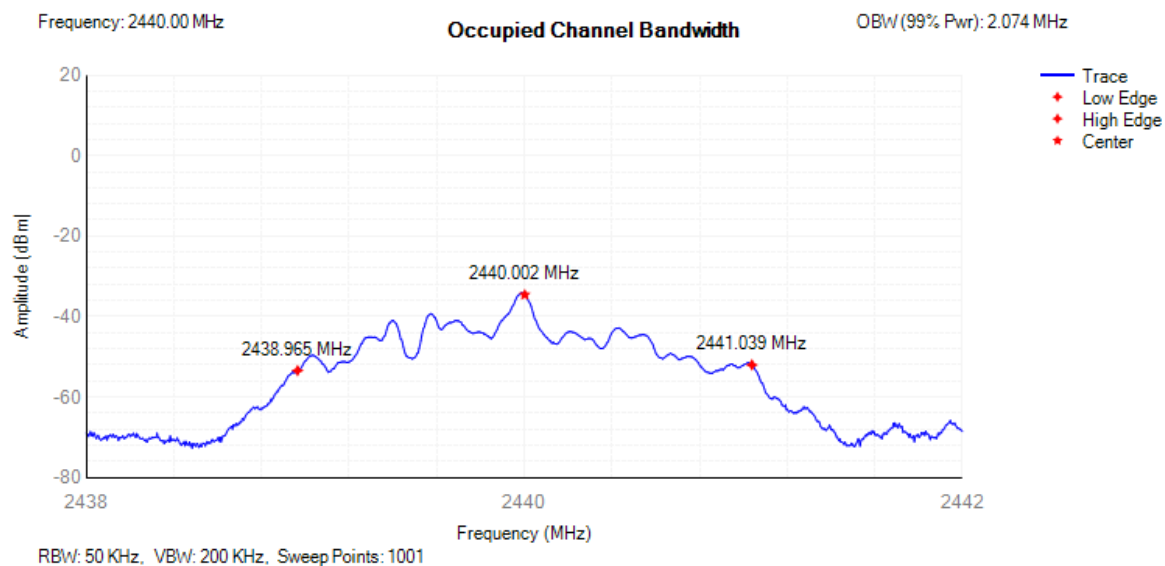


OBW NVNT BLE 2480MHz

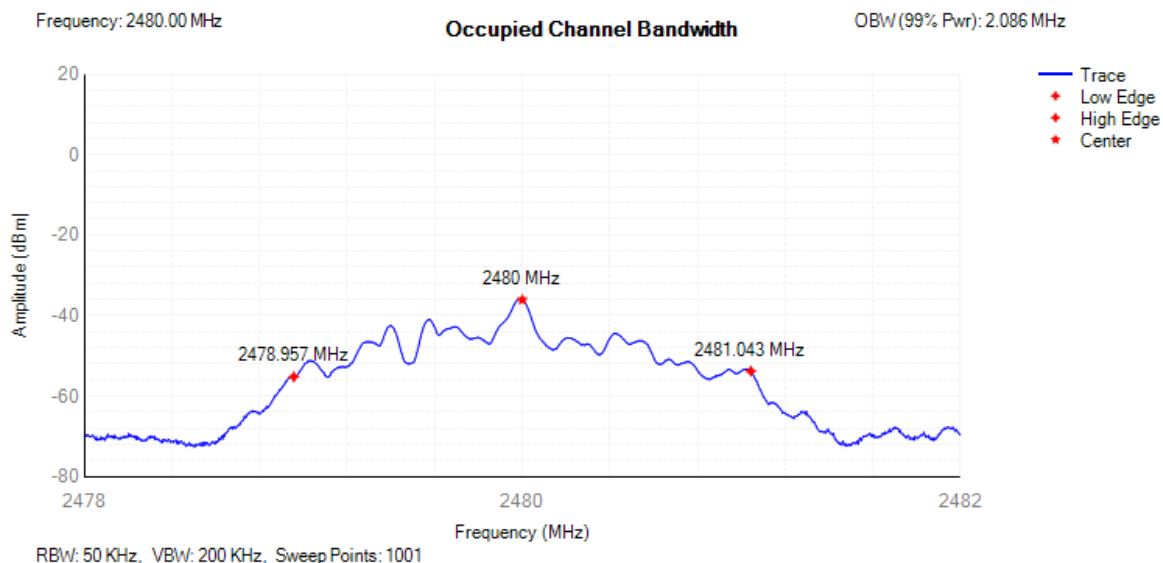


4.10 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	2399.5	-63.99	-10	Pass
NVNT	BLE	2402	2398.5	-61.7	-10	Pass
NVNT	BLE	2402	2398.426	-63.12	-10	Pass
NVNT	BLE	2402	2397.426	-63.94	-20	Pass
NVNT	BLE	2402	2396.426	-62.84	-20	Pass
NVNT	BLE	2402	2396.352	-63.44	-20	Pass
NVNT	BLE	2480	2484	-63.47	-10	Pass
NVNT	BLE	2480	2485	-62.6	-10	Pass
NVNT	BLE	2480	2485.086	-63.84	-10	Pass
NVNT	BLE	2480	2486.086	-62.9	-20	Pass
NVNT	BLE	2480	2487.086	-62.89	-20	Pass
NVNT	BLE	2480	2487.172	-63.4	-20	Pass

Tx. Emissions OOB NVNT BLE 2402MHz

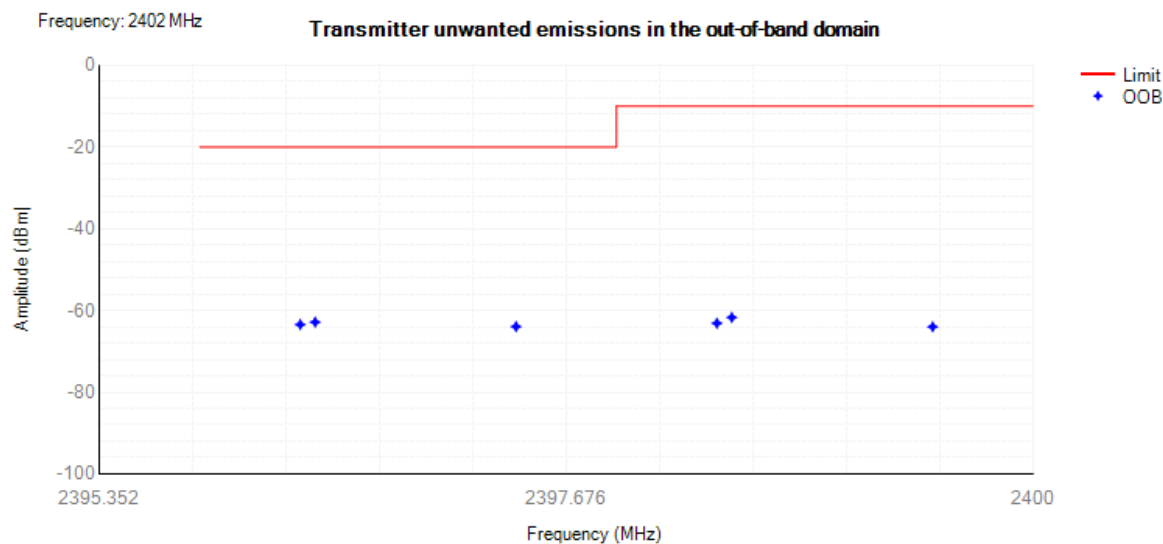

Tx. Emissions OOB NVNT BLE 2480MHz

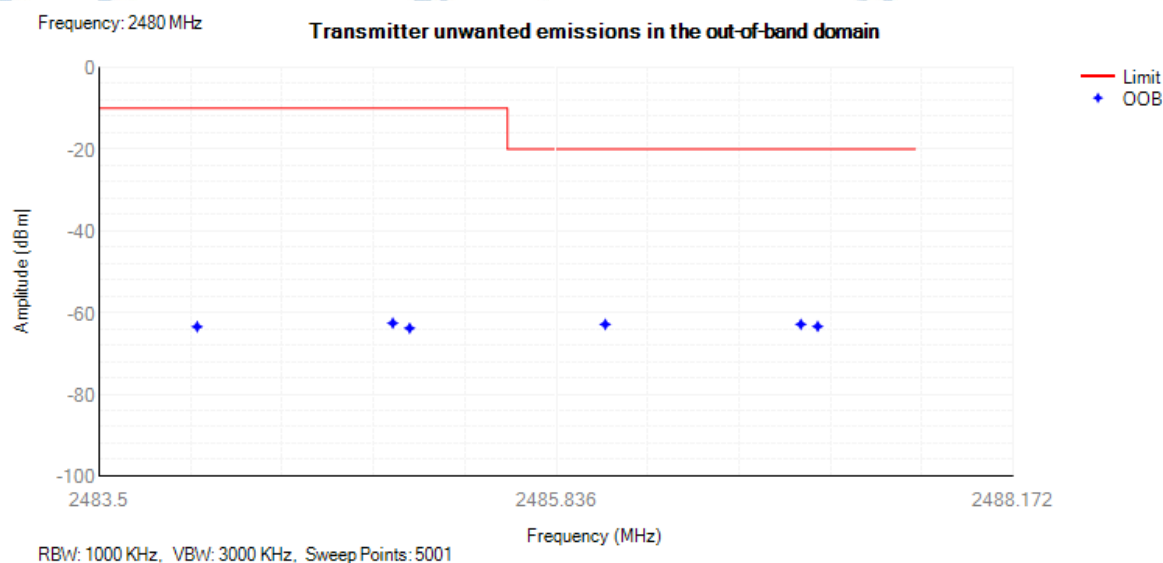


4.11 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -47 MHz	45.4	-66.12	NA	-36	Pass
NVNT	BLE	2402	47 MHz -74 MHz	64.25	-66.49	NA	-54	Pass
NVNT	BLE	2402	74 MHz -87.5 MHz	78.45	-66.45	NA	-36	Pass
NVNT	BLE	2402	87.5 MHz -118 MHz	109.5	-65.22	NA	-54	Pass
NVNT	BLE	2402	118 MHz -174 MHz	148.65	-65.53	NA	-36	Pass
NVNT	BLE	2402	174 MHz -230 MHz	215.95	-65.3	NA	-54	Pass
NVNT	BLE	2402	230 MHz -470 MHz	402.95	-64.2	NA	-36	Pass
NVNT	BLE	2402	470 MHz -694 MHz	488.75	-64.49	NA	-54	Pass
NVNT	BLE	2402	694 MHz -1000 MHz	925.15	-63.92	NA	-36	Pass
NVNT	BLE	2402	1000 MHz -2396 MHz	2146	-51.95	NA	-30	Pass
NVNT	BLE	2402	2487.5 MHz -12750 MHz	6779	-45.12	NA	-30	Pass
NVNT	BLE	2440	30 MHz -47 MHz	37.75	-66.64	NA	-36	Pass
NVNT	BLE	2440	47 MHz -74 MHz	58.2	-65.87	NA	-54	Pass
NVNT	BLE	2440	74 MHz -87.5 MHz	82.75	-65.67	NA	-36	Pass
NVNT	BLE	2440	87.5 MHz -118 MHz	104.1	-65.23	NA	-54	Pass
NVNT	BLE	2440	118 MHz -174 MHz	132.75	-65.79	NA	-36	Pass
NVNT	BLE	2440	174 MHz -230 MHz	203.45	-65.02	NA	-54	Pass
NVNT	BLE	2440	230 MHz -470 MHz	275.25	-65.29	NA	-36	Pass
NVNT	BLE	2440	470 MHz -694 MHz	662.95	-63.86	NA	-54	Pass
NVNT	BLE	2440	694 MHz -1000 MHz	986.4	-63.41	NA	-36	Pass
NVNT	BLE	2440	1000 MHz -2396 MHz	2245	-52.46	NA	-30	Pass
NVNT	BLE	2440	2487.5 MHz -12750 MHz	6962.5	-45.15	NA	-30	Pass
NVNT	BLE	2480	30 MHz -47 MHz	34.85	-66.92	NA	-36	Pass
NVNT	BLE	2480	47 MHz -74 MHz	53.55	-64.88	NA	-54	Pass
NVNT	BLE	2480	74 MHz -87.5 MHz	74.25	-66.27	NA	-36	Pass
NVNT	BLE	2480	87.5 MHz -118 MHz	115.25	-66.23	NA	-54	Pass
NVNT	BLE	2480	118 MHz -174 MHz	172.75	-65.5	NA	-36	Pass
NVNT	BLE	2480	174 MHz -230 MHz	211.3	-64.34	NA	-54	Pass
NVNT	BLE	2480	230 MHz -470 MHz	367.9	-64.81	NA	-36	Pass
NVNT	BLE	2480	470 MHz -694 MHz	599.9	-64.56	NA	-54	Pass
NVNT	BLE	2480	694 MHz -1000 MHz	953.95	-63.68	NA	-36	Pass
NVNT	BLE	2480	1000 MHz -2396 MHz	2351.5	-52.39	NA	-30	Pass
NVNT	BLE	2480	2487.5 MHz -12750 MHz	6724	-45.45	NA	-30	Pass

Tx. Spurious NVNT BLE 2402MHz

Frequency: 2402 MHz


Transmitter unwanted emissions in the spurious domain

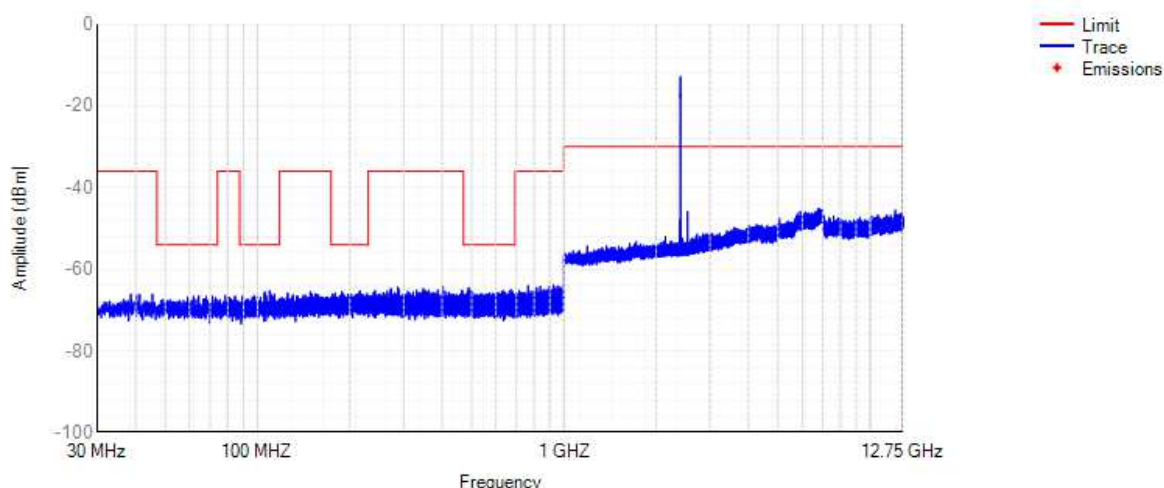

Tx. Spurious NVNT BLE 2440MHz

Frequency: 2440 MHz


Transmitter unwanted emissions in the spurious domain

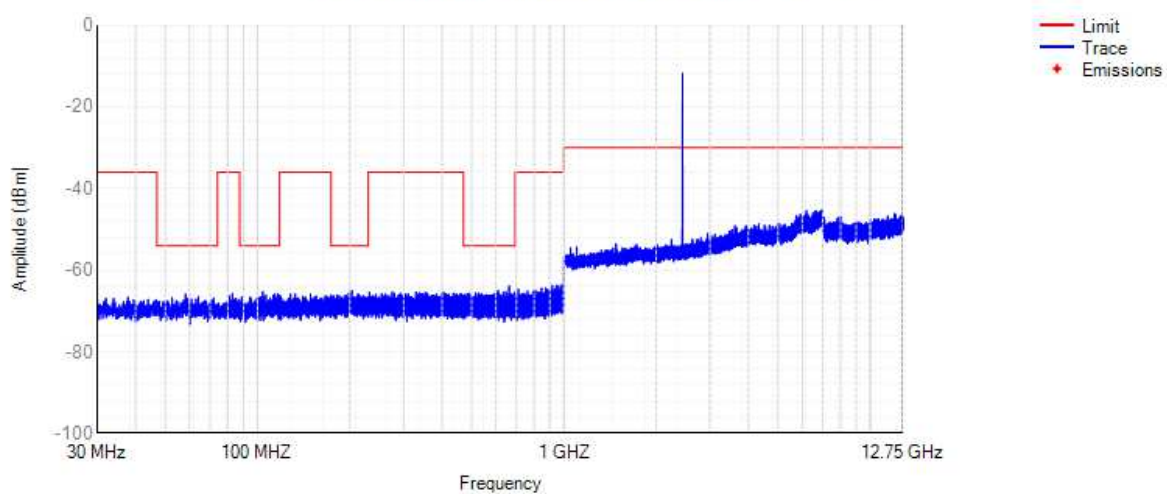

Tx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz


Transmitter unwanted emissions in the spurious domain

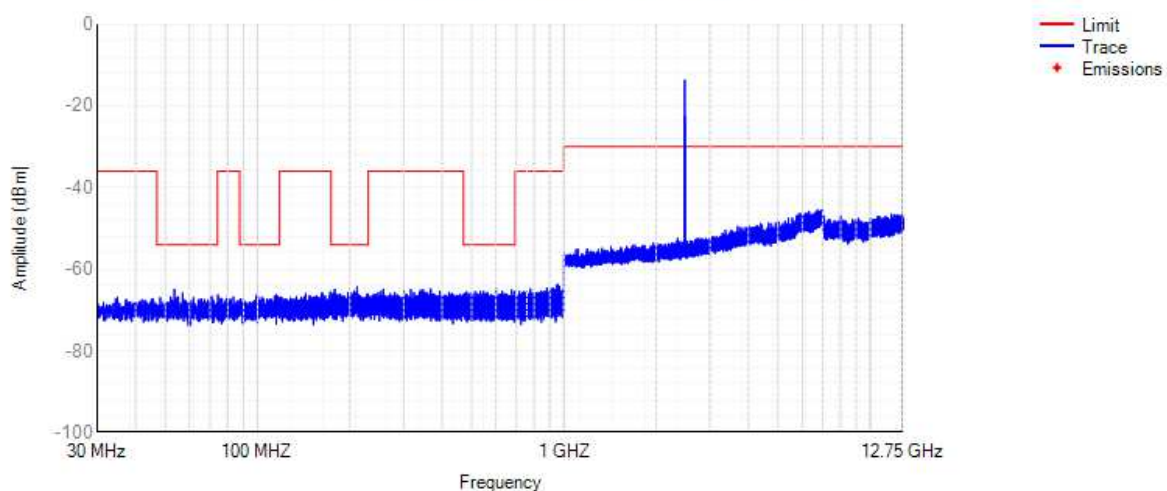


4.12 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -1000 MHz	979	-74.16	NA	-57	Pass
NVNT	BLE	2402	1000 MHz -12750 MHz	6834.5	-55.26	NA	-47	Pass
NVNT	BLE	2440	30 MHz -1000 MHz	982.1	-74.38	NA	-57	Pass
NVNT	BLE	2440	1000 MHz -12750 MHz	6769.5	-55.64	NA	-47	Pass
NVNT	BLE	2480	30 MHz -1000 MHz	968.4	-74.53	NA	-57	Pass
NVNT	BLE	2480	1000 MHz -12750 MHz	6907.5	-55.59	NA	-47	Pass

Rx. Spurious NVNT BLE 2402MHz

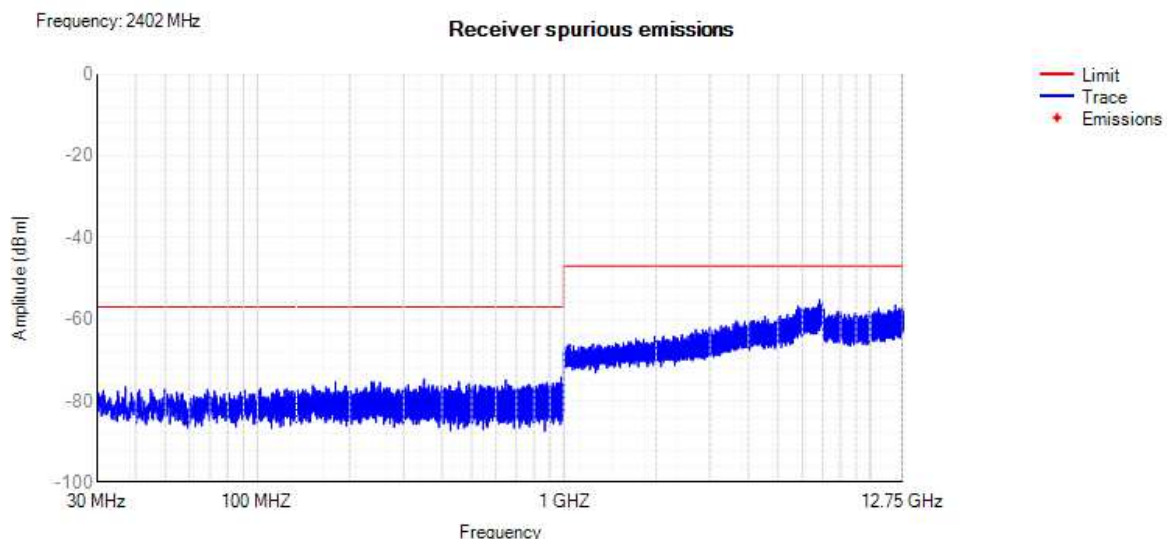


Rx. Spurious NVNT BLE 2440MHz

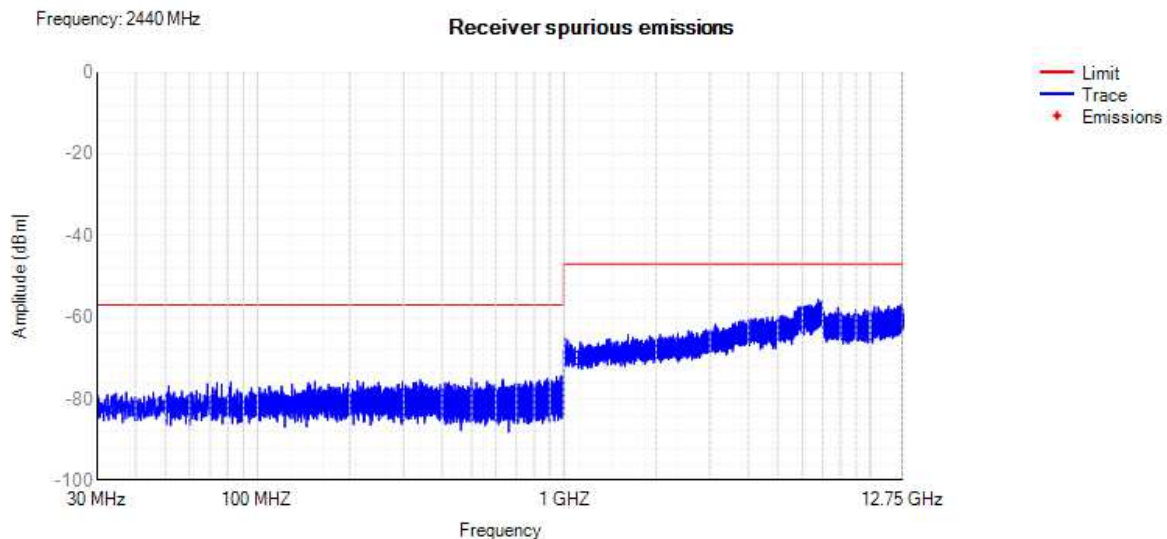

Rx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz

Receiver spurious emissions

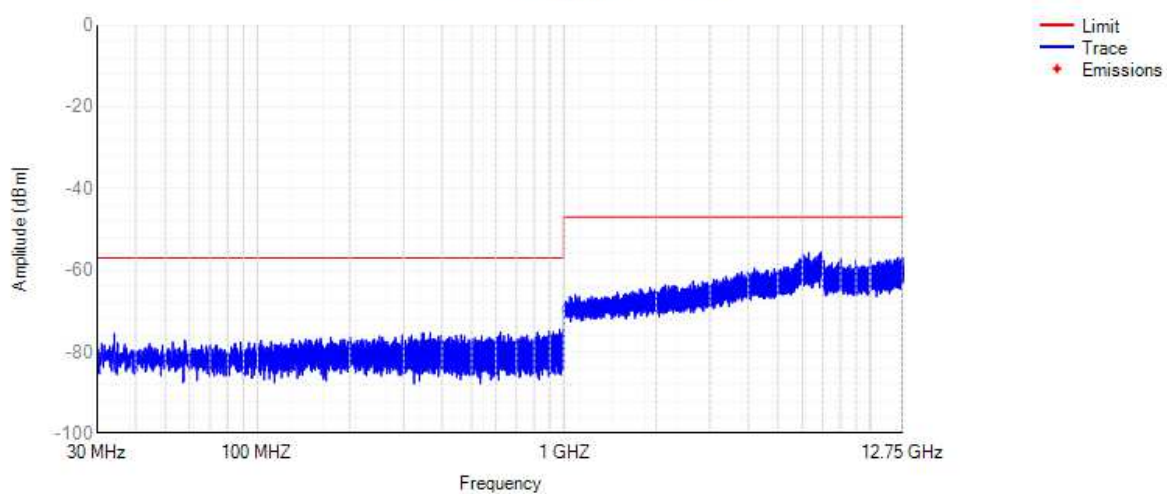


Module 3

1M


4.1 RF Output Power

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	0.42	241	5.42	20	Pass
NVNT	BLE	2440	1.39	240	6.39	20	Pass
NVNT	BLE	2480	0.79	240	5.79	20	Pass
NVLT	BLE	2402	-0.43	240	4.57	20	Pass
NVLT	BLE	2440	0.61	240	5.61	20	Pass
NVLT	BLE	2480	0.25	240	5.25	20	Pass
NVHT	BLE	2402	-0.49	240	4.51	20	Pass
NVHT	BLE	2440	0.71	240	5.71	20	Pass
NVHT	BLE	2480	0.45	240	5.45	20	Pass


Power NVNT BLE 2402MHz

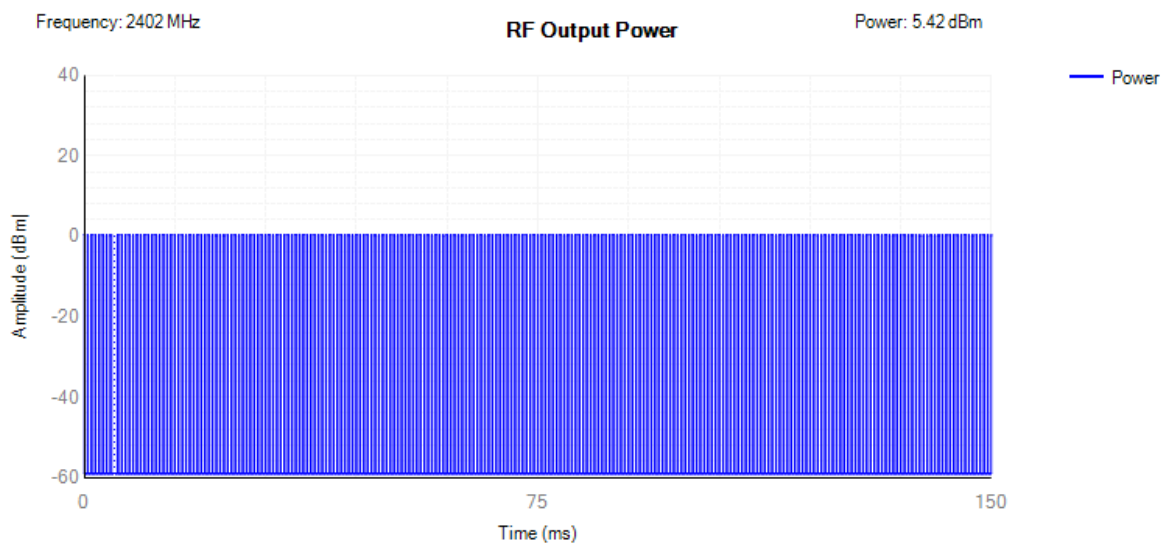

Power NVNT BLE 2440MHz

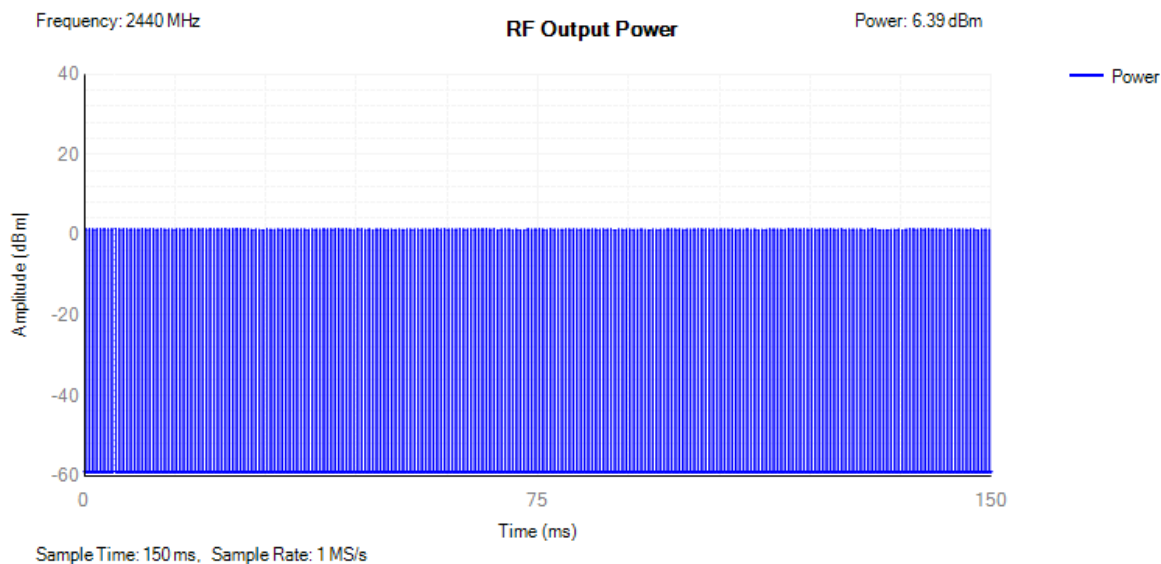


Power NVNT BLE 2480MHz

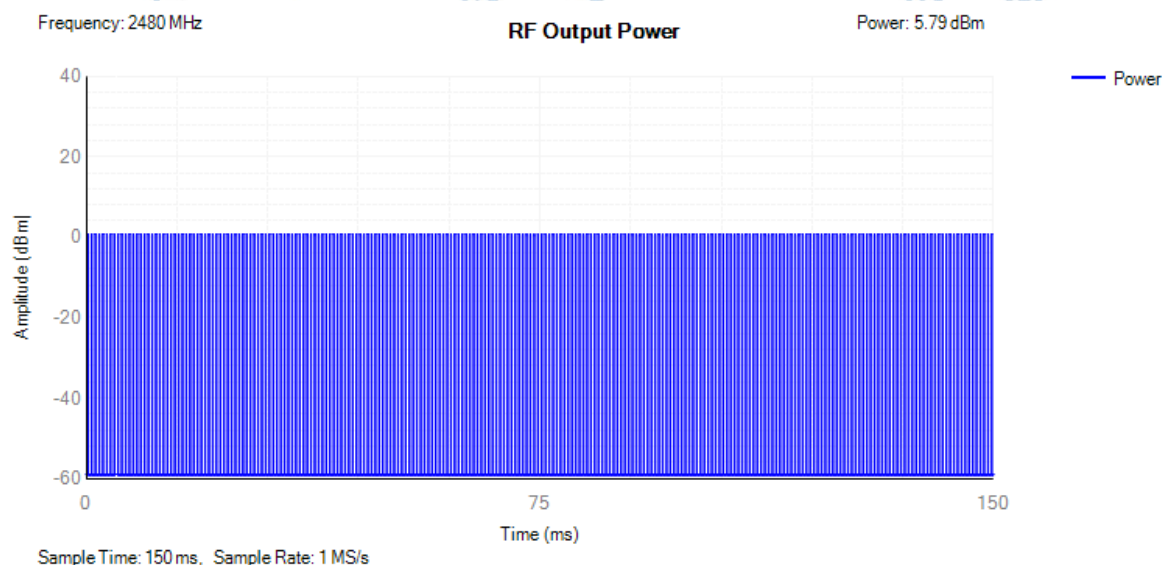


4.2 Power Spectral Density


Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	5.33	10	Pass
NVNT	BLE	2440	6.3	10	Pass
NVNT	BLE	2480	5.7	10	Pass

PSD NVNT BLE 2402MHz

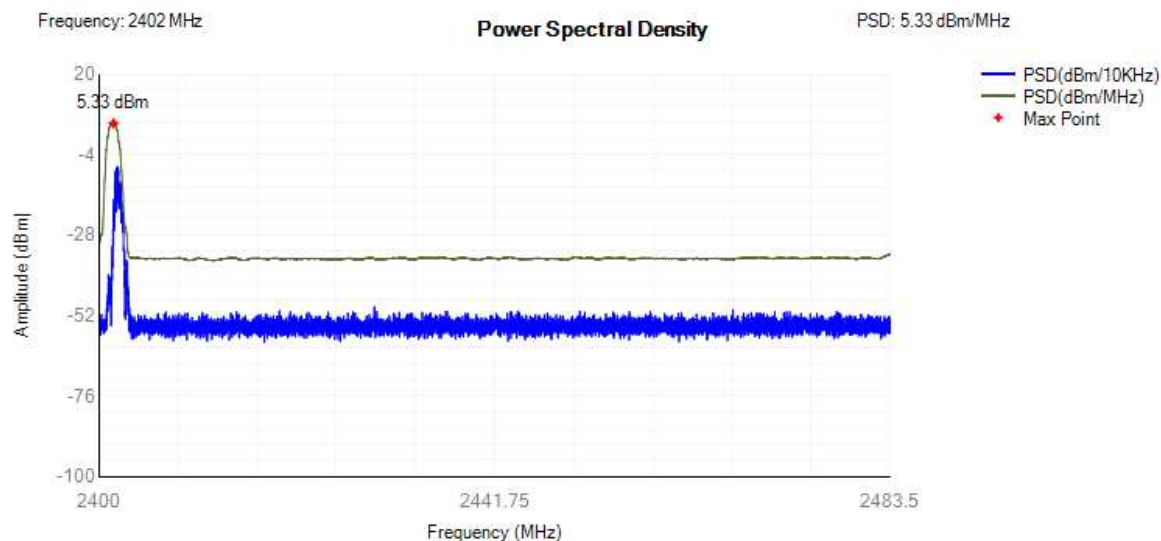

PSD NVNT BLE 2440MHz

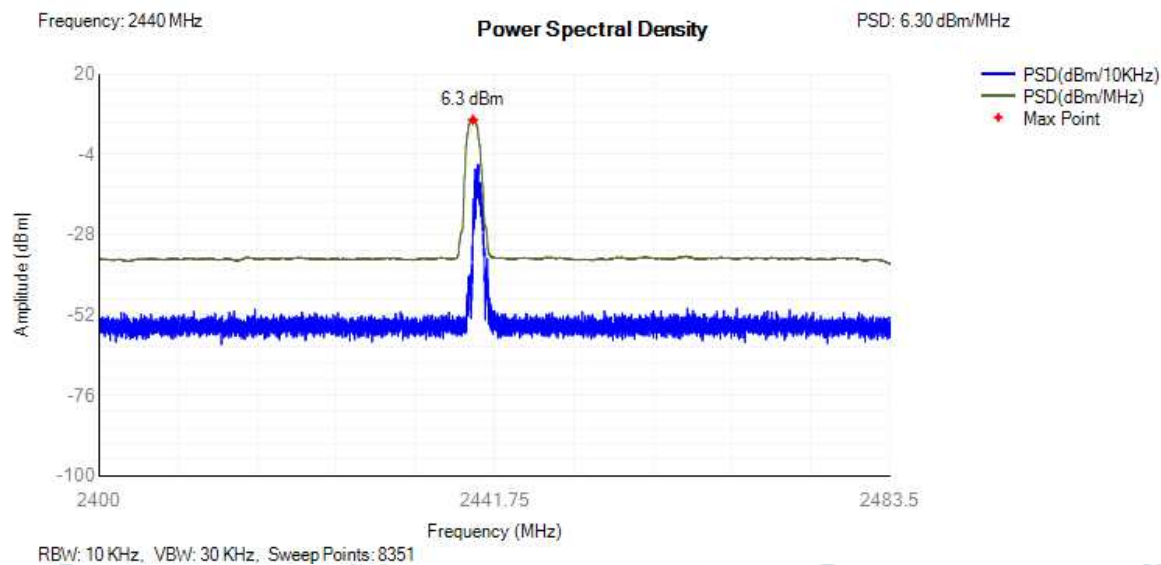


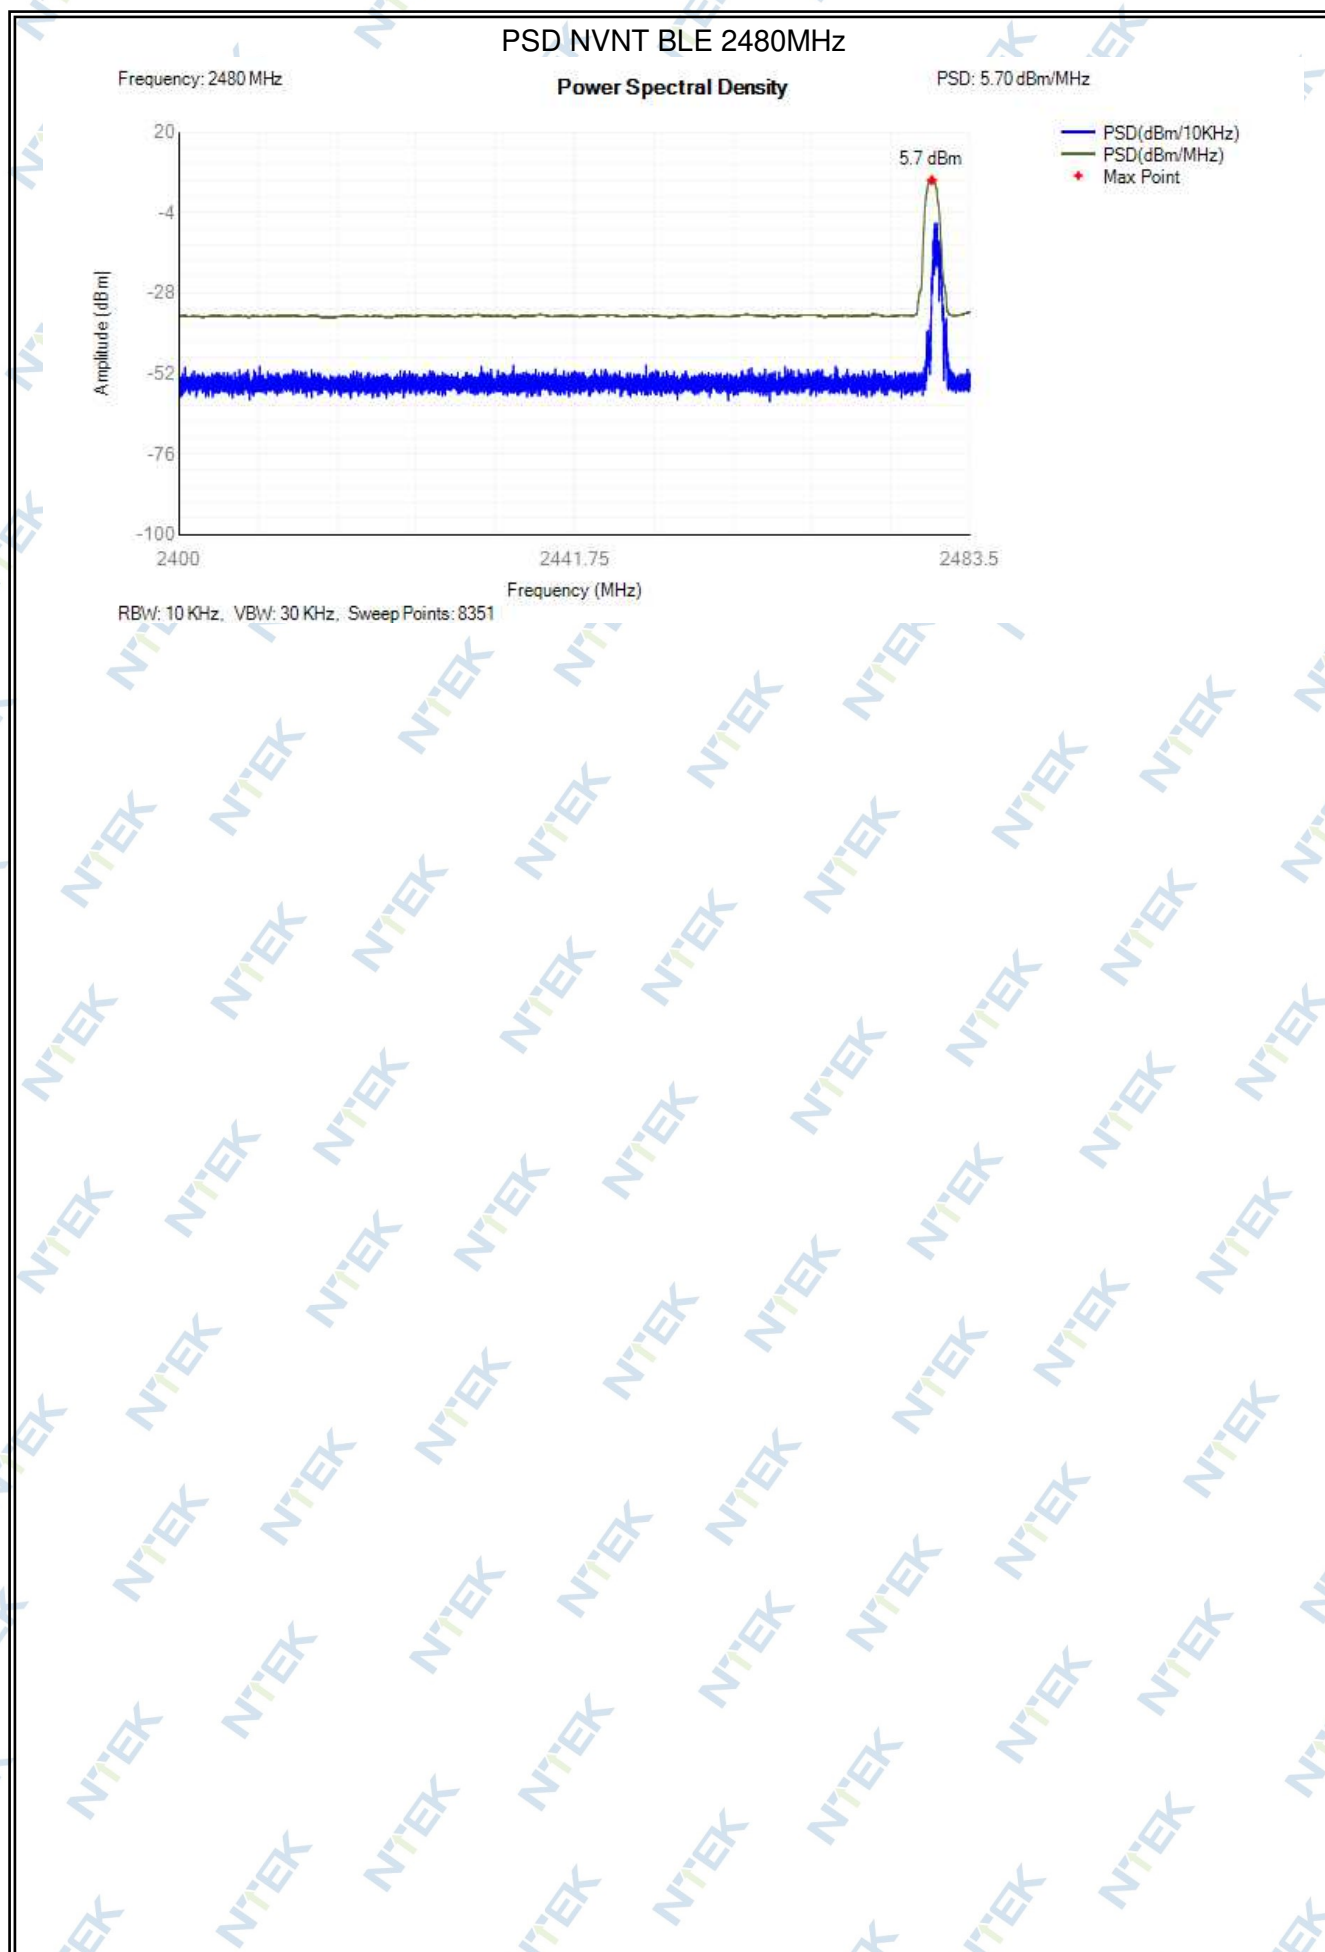


4.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	BLE	2402	2402.009	1.025	2401.497	2402.521	2400 - 2483.5MHz	Pass
NVNT	BLE	2440	2440.007	1.025	2439.495	2440.519	2400 - 2483.5MHz	Pass
NVNT	BLE	2480	2480.009	1.025	2479.497	2480.521	2400 - 2483.5MHz	Pass

OBW NVNT BLE 2402MHz

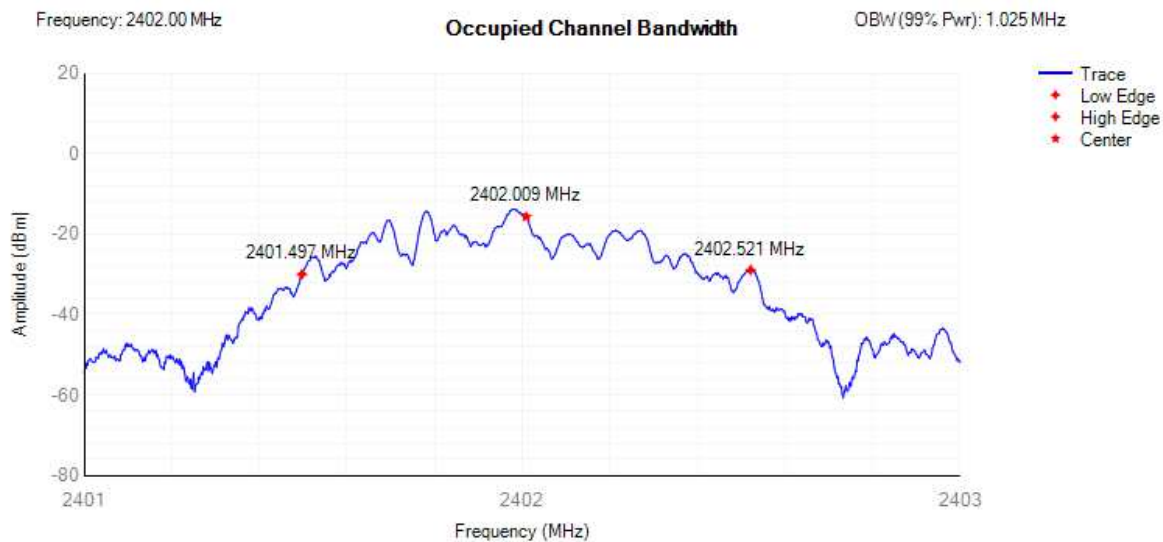

OBW NVNT BLE 2440MHz

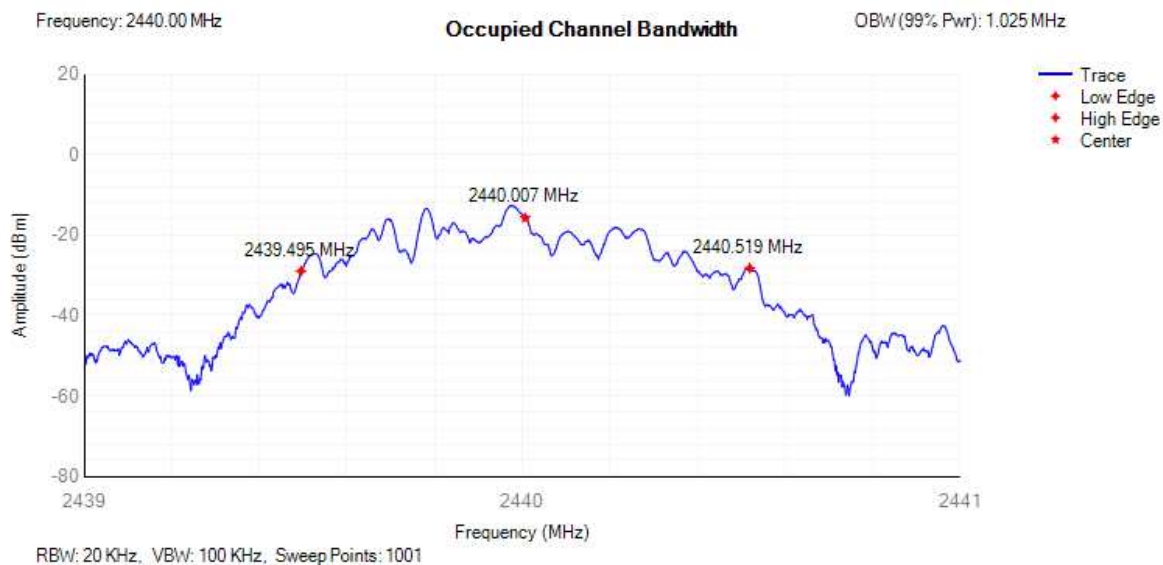


OBW NVNT BLE 2480MHz

Frequency: 2480.00 MHz

Occupied Channel Bandwidth

OBW (99% Pwr): 1.025 MHz

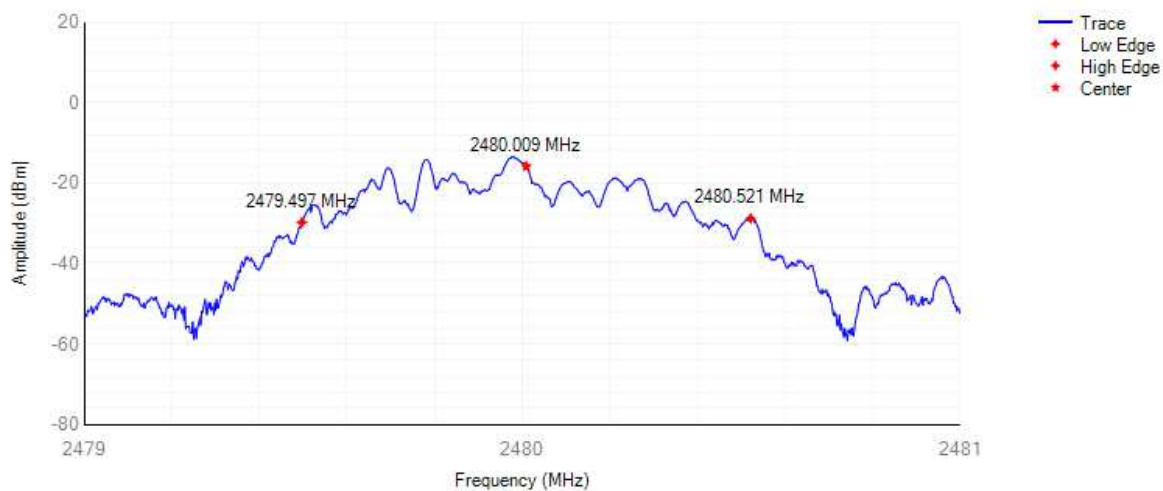


RBW: 20 KHz, VBW: 100 KHz, Sweep Points: 1001


4.4 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	2399.5	-62.92	-10	Pass
NVNT	BLE	2402	2399.475	-63.27	-10	Pass
NVNT	BLE	2402	2398.475	-63.19	-20	Pass
NVNT	BLE	2402	2398.45	-64	-20	Pass
NVNT	BLE	2480	2484	-58.58	-10	Pass
NVNT	BLE	2480	2484.025	-62.04	-10	Pass
NVNT	BLE	2480	2485.025	-58.72	-20	Pass
NVNT	BLE	2480	2485.05	-63.43	-20	Pass

Tx. Emissions OOB NVNT BLE 2402MHz

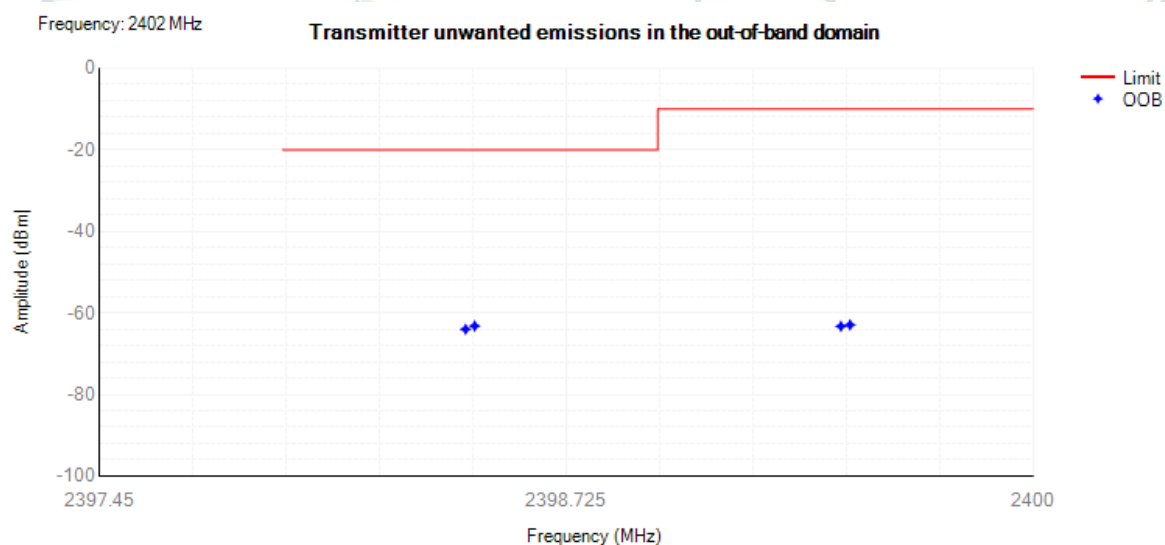

Tx. Emissions OOB NVNT BLE 2480MHz

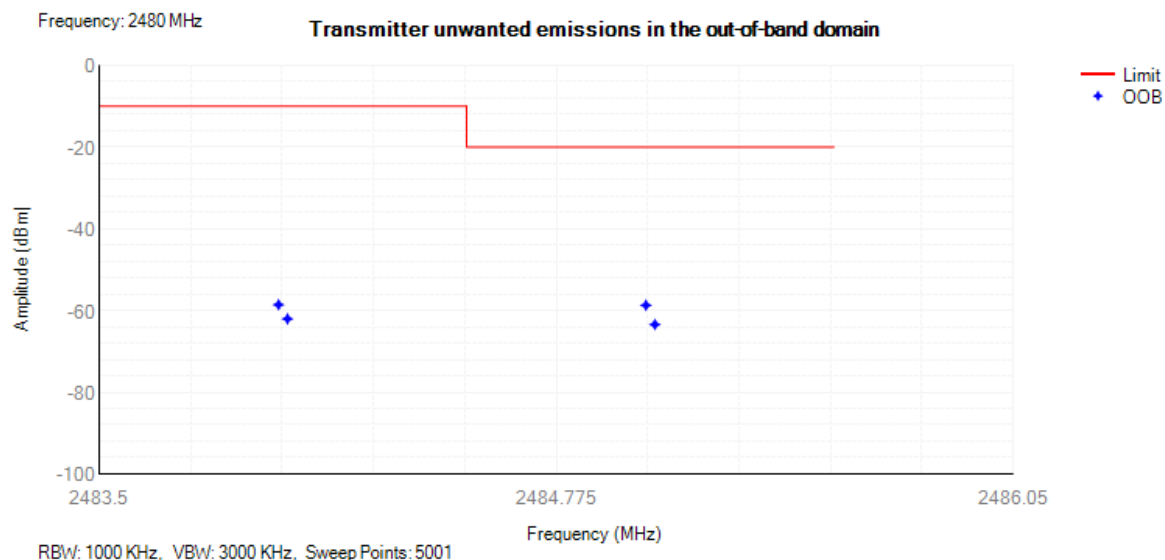


4.5 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -47 MHz	34.1	-65.85	NA	-36	Pass
NVNT	BLE	2402	47 MHz -74 MHz	47.4	-65.85	NA	-54	Pass
NVNT	BLE	2402	74 MHz -87.5 MHz	80.65	-64.07	NA	-36	Pass
NVNT	BLE	2402	87.5 MHz -118 MHz	110.2	-66.28	NA	-54	Pass
NVNT	BLE	2402	118 MHz -174 MHz	122.7	-65.47	NA	-36	Pass
NVNT	BLE	2402	174 MHz -230 MHz	178.35	-65.03	NA	-54	Pass
NVNT	BLE	2402	230 MHz -470 MHz	365	-65.14	NA	-36	Pass
NVNT	BLE	2402	470 MHz -694 MHz	505.7	-64.34	NA	-54	Pass
NVNT	BLE	2402	694 MHz -1000 MHz	878.9	-64.36	NA	-36	Pass
NVNT	BLE	2402	1000 MHz -2398 MHz	2274	-47.46	NA	-30	Pass
NVNT	BLE	2402	2485.5 MHz -12750 MHz	6864.5	-45.04	NA	-30	Pass
NVNT	BLE	2440	30 MHz -47 MHz	43.15	-65.66	NA	-36	Pass
NVNT	BLE	2440	47 MHz -74 MHz	47.35	-66.57	NA	-54	Pass
NVNT	BLE	2440	74 MHz -87.5 MHz	87.25	-65.52	NA	-36	Pass
NVNT	BLE	2440	87.5 MHz -118 MHz	104.3	-65.58	NA	-54	Pass
NVNT	BLE	2440	118 MHz -174 MHz	143.25	-65.37	NA	-36	Pass
NVNT	BLE	2440	174 MHz -230 MHz	203.25	-64.25	NA	-54	Pass
NVNT	BLE	2440	230 MHz -470 MHz	230.95	-65.05	NA	-36	Pass
NVNT	BLE	2440	470 MHz -694 MHz	499.75	-65.14	NA	-54	Pass
NVNT	BLE	2440	694 MHz -1000 MHz	909.95	-64.3	NA	-36	Pass
NVNT	BLE	2440	1000 MHz -2398 MHz	2311.5	-46.57	NA	-30	Pass
NVNT	BLE	2440	2485.5 MHz -12750 MHz	6995	-44.4	NA	-30	Pass
NVNT	BLE	2480	30 MHz -47 MHz	32.75	-66.73	NA	-36	Pass
NVNT	BLE	2480	47 MHz -74 MHz	53.05	-66.54	NA	-54	Pass
NVNT	BLE	2480	74 MHz -87.5 MHz	75.5	-66.25	NA	-36	Pass
NVNT	BLE	2480	87.5 MHz -118 MHz	114.25	-66.05	NA	-54	Pass
NVNT	BLE	2480	118 MHz -174 MHz	151.85	-65.25	NA	-36	Pass
NVNT	BLE	2480	174 MHz -230 MHz	215.45	-64.49	NA	-54	Pass
NVNT	BLE	2480	230 MHz -470 MHz	348.1	-63.78	NA	-36	Pass
NVNT	BLE	2480	470 MHz -694 MHz	575.85	-64.1	NA	-54	Pass
NVNT	BLE	2480	694 MHz -1000 MHz	810.9	-64.19	NA	-36	Pass
NVNT	BLE	2480	1000 MHz -2398 MHz	2340	-47.8	NA	-30	Pass
NVNT	BLE	2480	2485.5 MHz -12750 MHz	6882	-44.95	NA	-30	Pass

Tx. Spurious NVNT BLE 2402MHz

Frequency: 2402 MHz


Transmitter unwanted emissions in the spurious domain

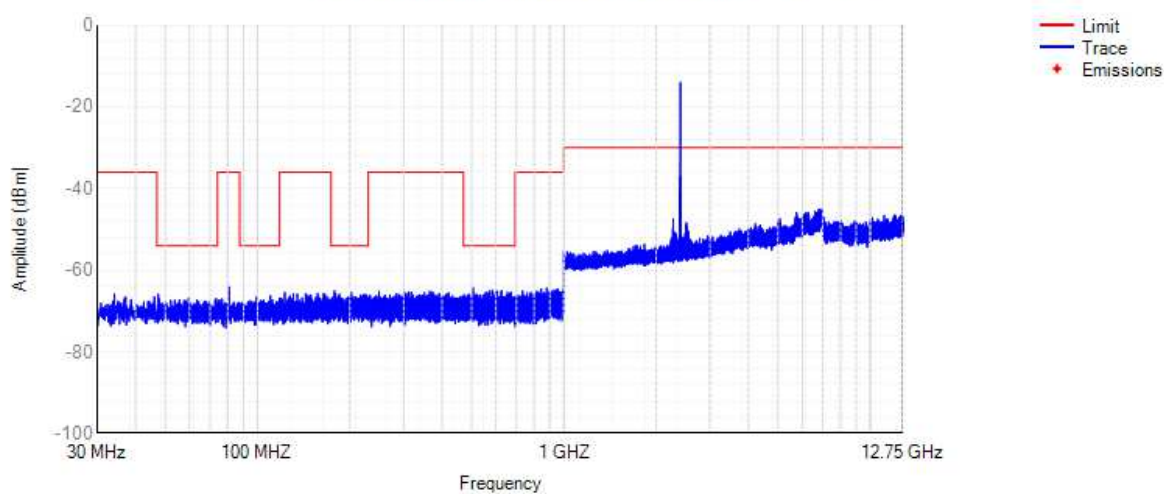

Tx. Spurious NVNT BLE 2440MHz

Frequency: 2440 MHz


Transmitter unwanted emissions in the spurious domain

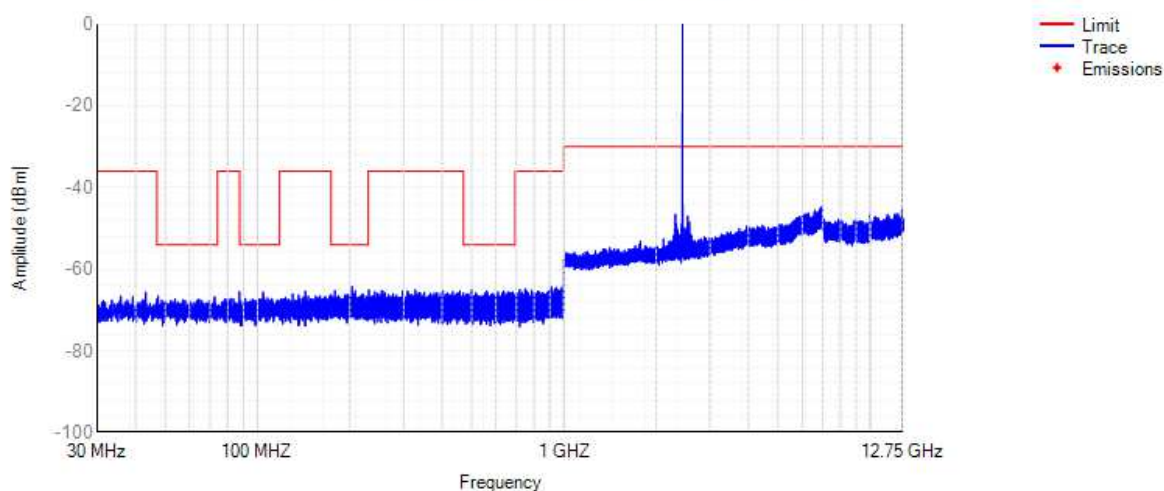

Tx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz


Transmitter unwanted emissions in the spurious domain

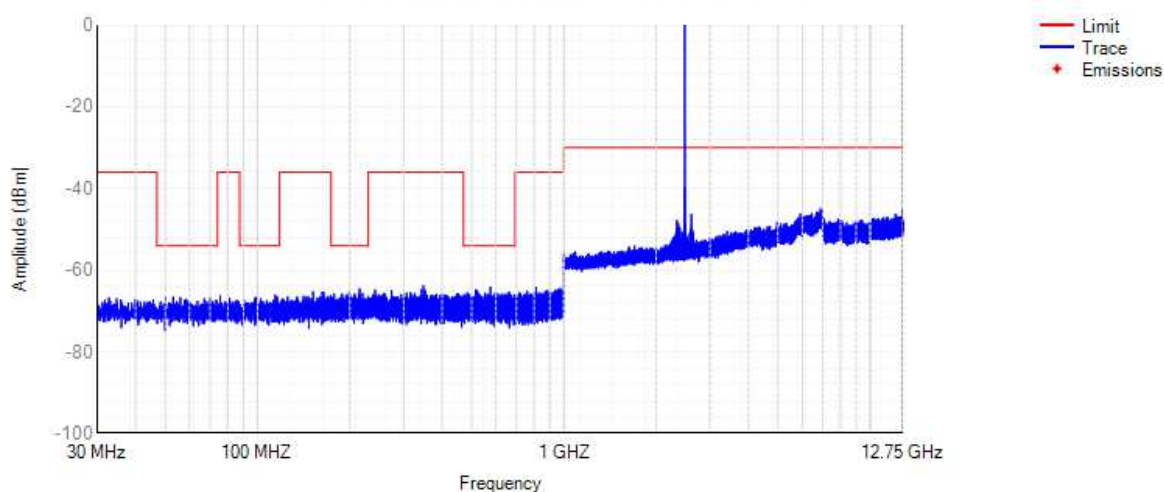


4.6 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -1000 MHz	864.103	-74.04	NA	-57	Pass
NVNT	BLE	2402	1000 MHz -12750 MHz	6893	-54.28	NA	-47	Pass
NVNT	BLE	2440	30 MHz -1000 MHz	249.8	-73.82	NA	-57	Pass
NVNT	BLE	2440	1000 MHz -12750 MHz	6958	-54.59	NA	-47	Pass
NVNT	BLE	2480	30 MHz -1000 MHz	899.7	-72.74	NA	-57	Pass
NVNT	BLE	2480	1000 MHz -12750 MHz	6947.5	-54.71	NA	-47	Pass

Rx. Spurious NVNT BLE 2402MHz

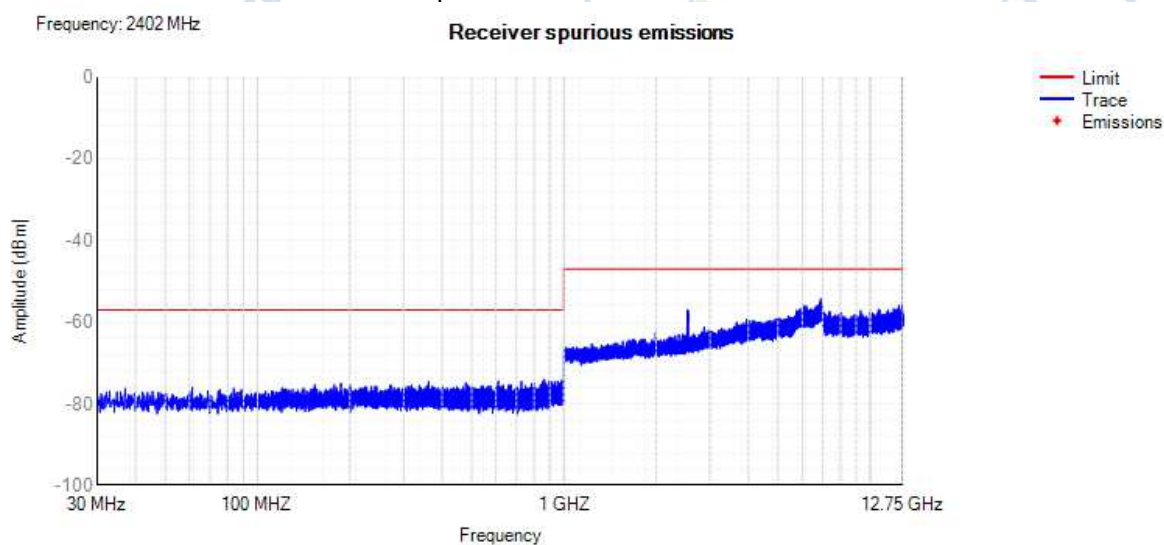


Rx. Spurious NVNT BLE 2440MHz

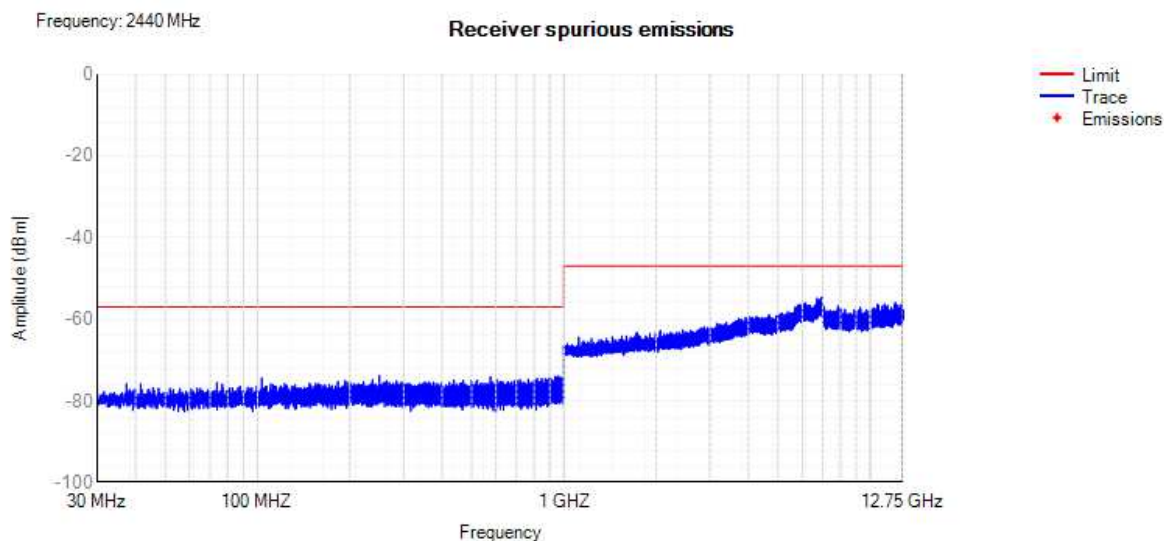

Rx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz

Receiver spurious emissions

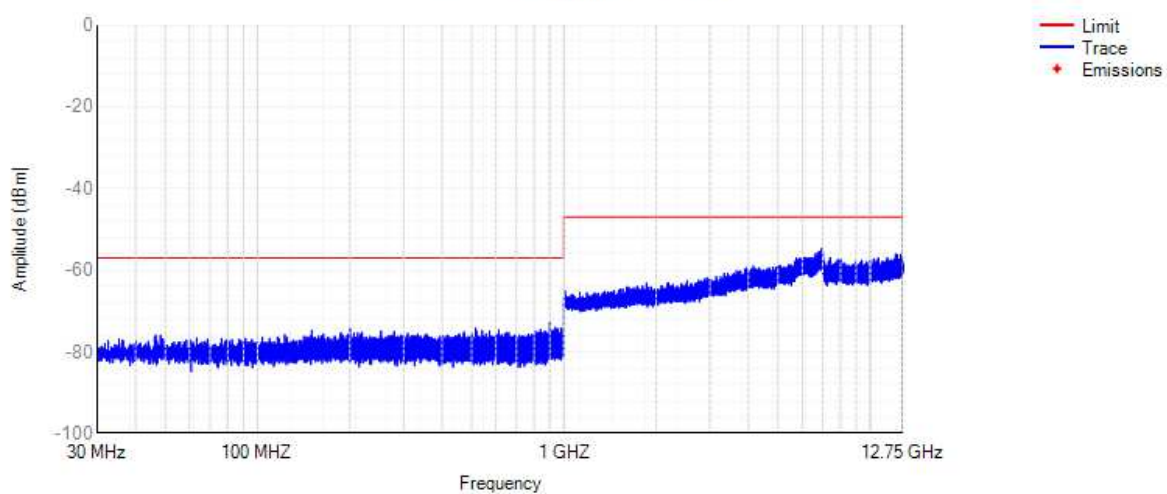


Module 3

2M


4.7 RF Output Power


Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	0.56	160	5.56	20	Pass
NVNT	BLE	2440	1.32	160	6.32	20	Pass
NVNT	BLE	2480	0.8	160	5.8	20	Pass
NVLT	BLE	2402	-0.29	160	4.71	20	Pass
NVLT	BLE	2440	0.54	160	5.54	20	Pass
NVLT	BLE	2480	0.26	160	5.26	20	Pass
NVHT	BLE	2402	-0.35	160	4.65	20	Pass
NVHT	BLE	2440	0.64	160	5.64	20	Pass
NVHT	BLE	2480	0.46	160	5.46	20	Pass

Power NVNT BLE 2402MHz

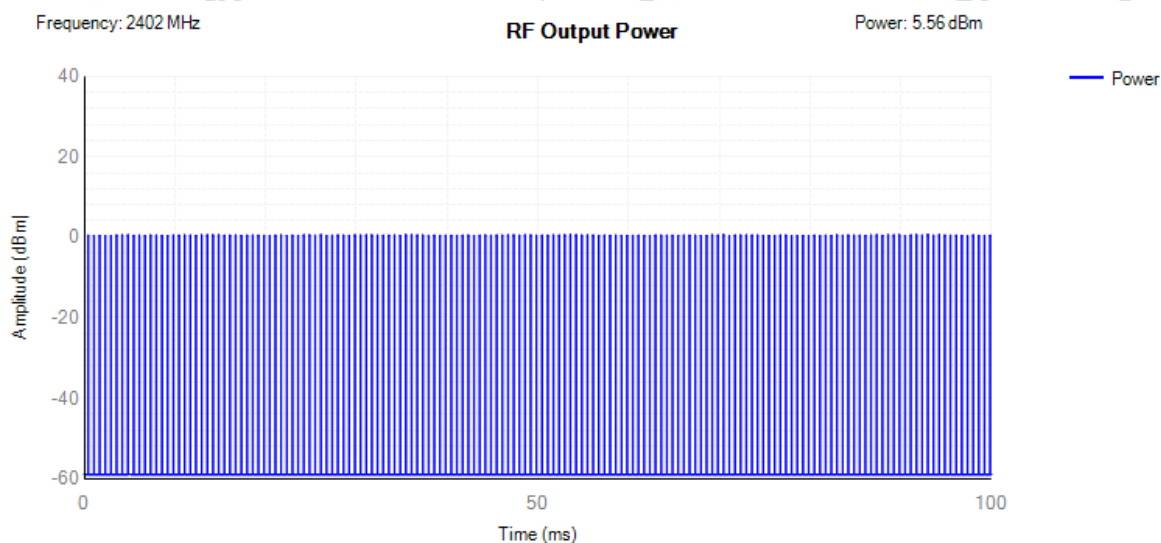

Power NVNT BLE 2440MHz

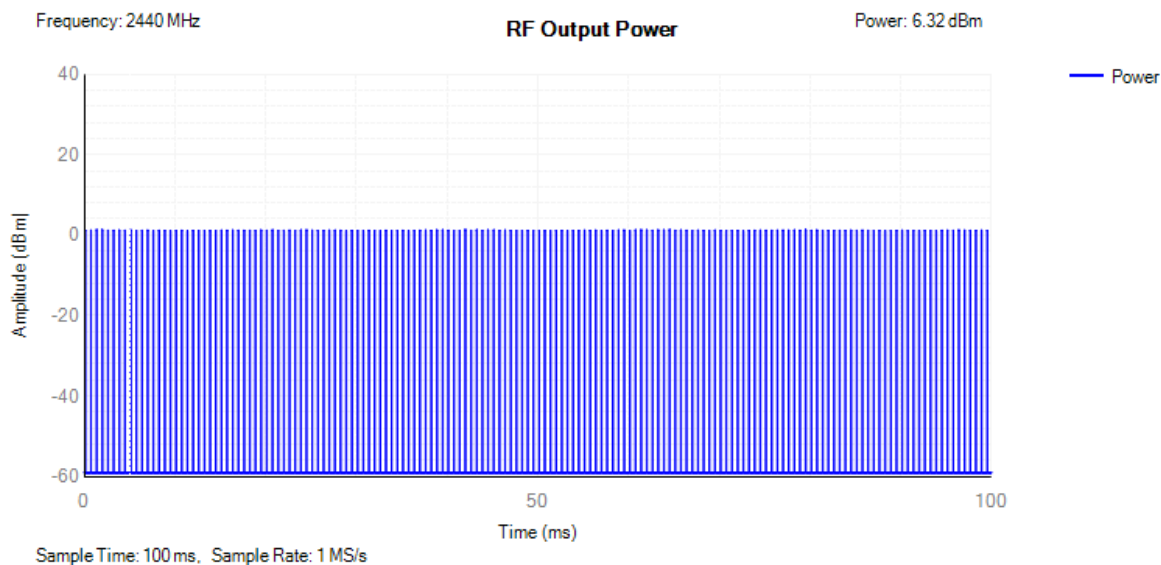


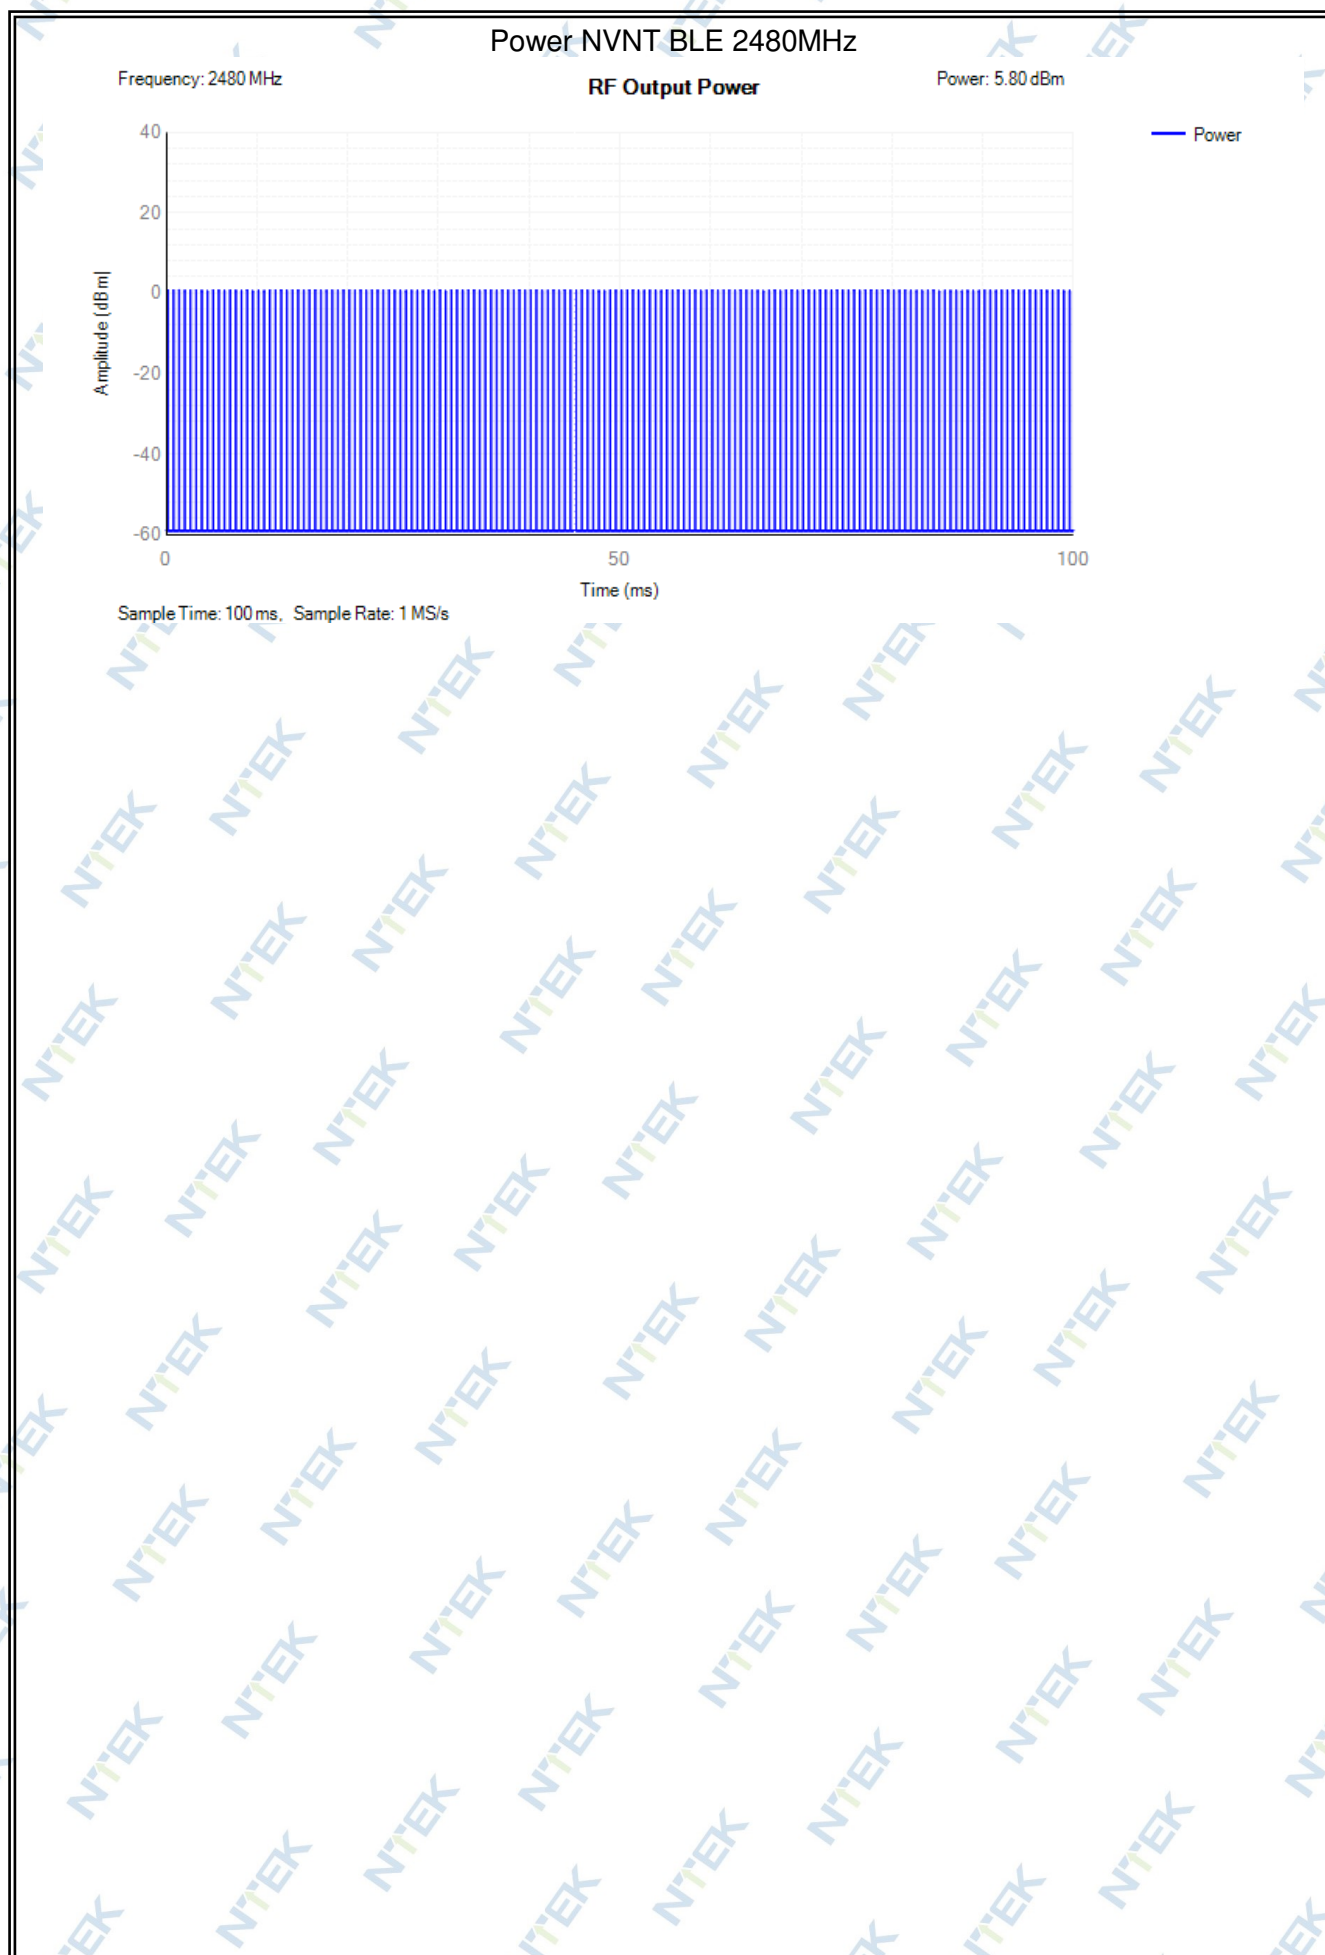


4.8 Power Spectral Density


Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	4.76	10	Pass
NVNT	BLE	2440	5.39	10	Pass
NVNT	BLE	2480	4.85	10	Pass

PSD NVNT BLE 2402MHz

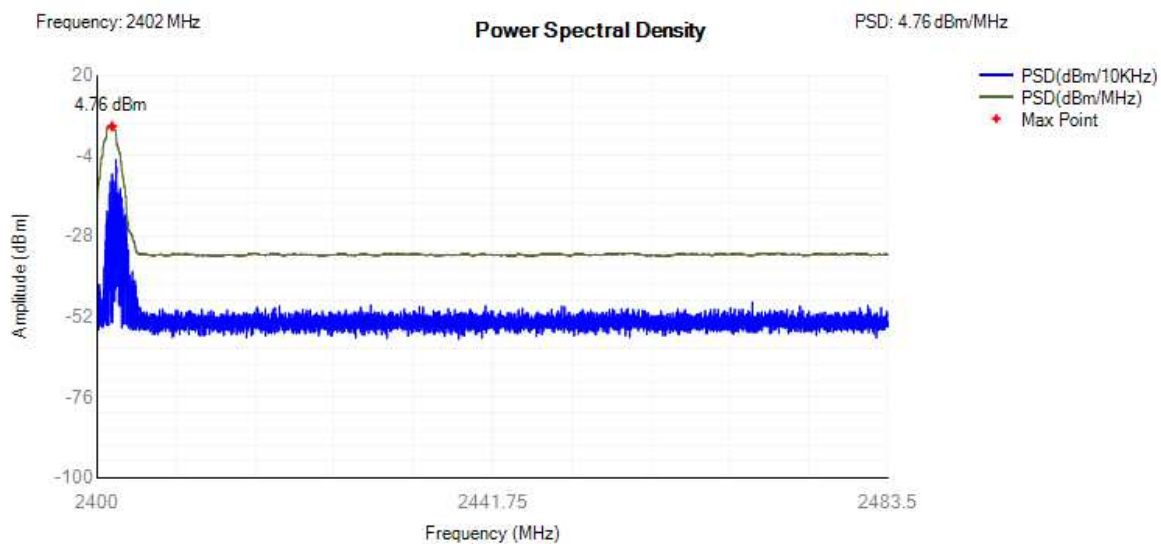

PSD NVNT BLE 2440MHz

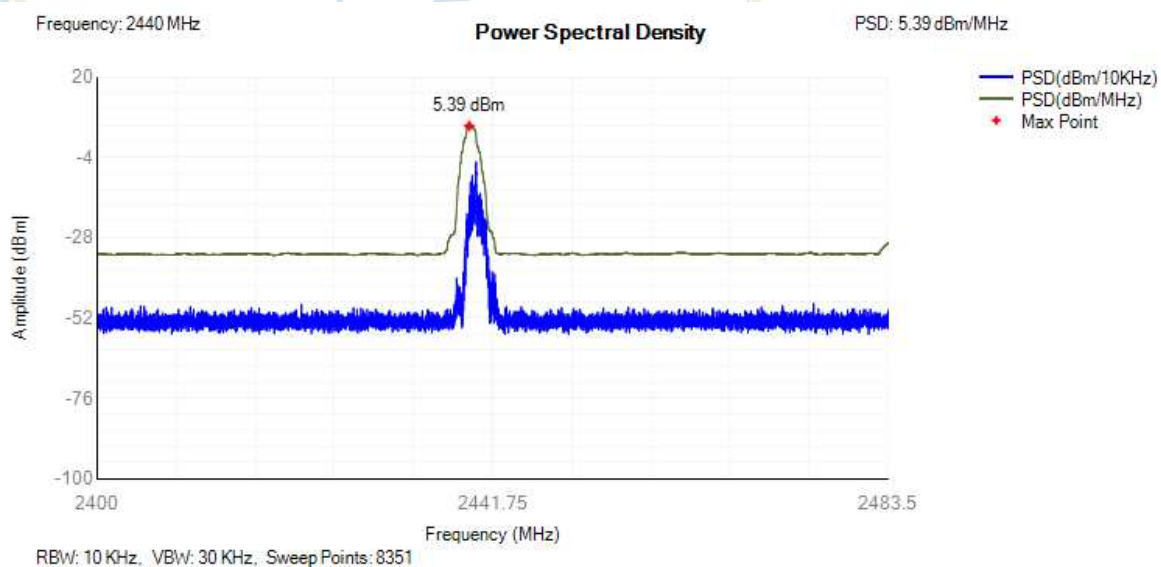


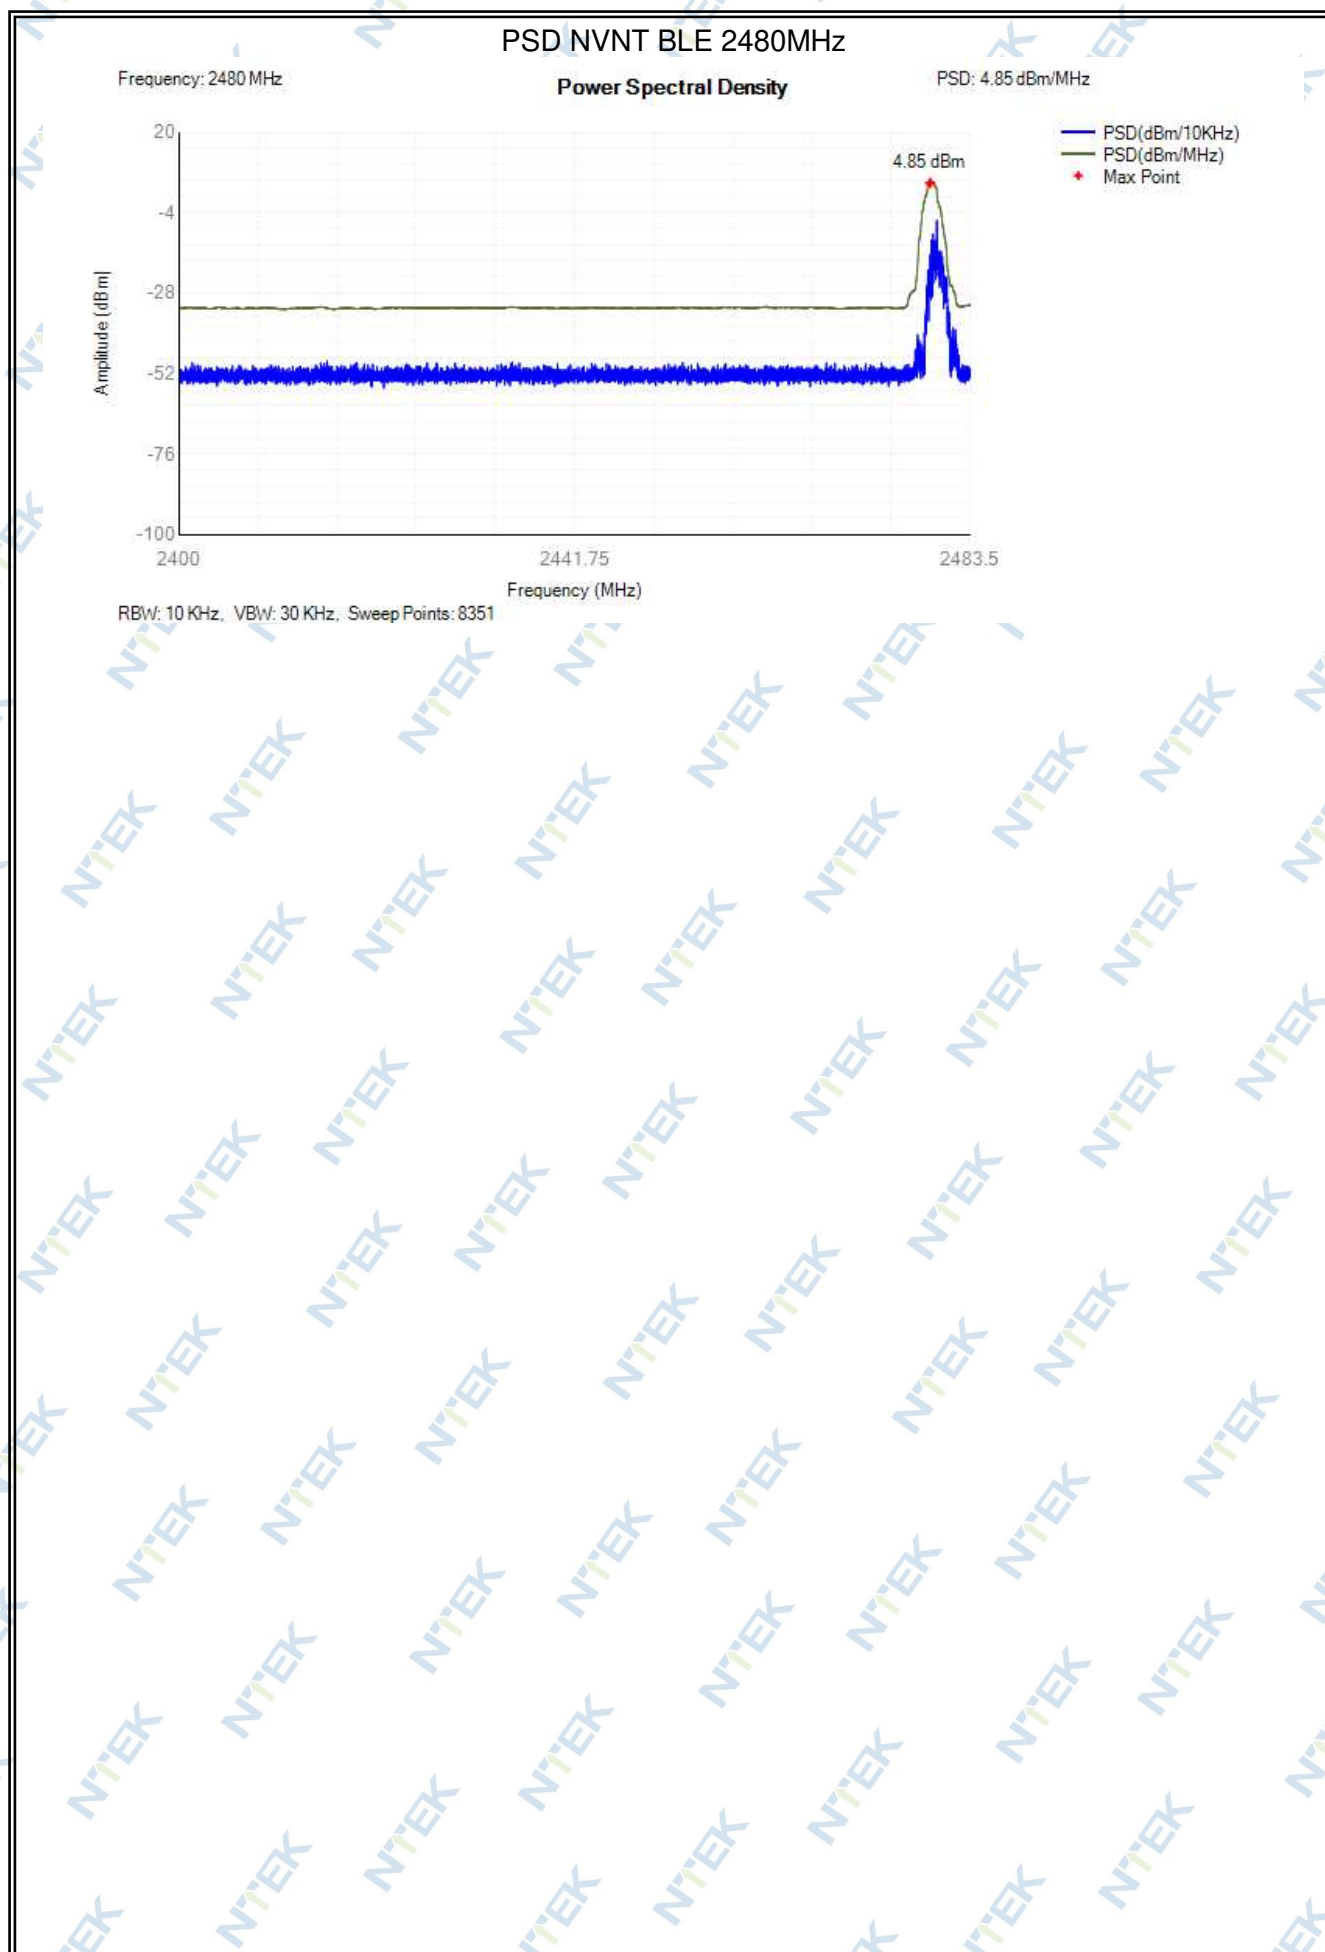


4.9 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	BLE	2402	2402.01	2.05	2400.985	2403.035	2400 - 2483.5MHz	Pass
NVNT	BLE	2440	2440.006	2.058	2438.977	2441.035	2400 - 2483.5MHz	Pass
NVNT	BLE	2480	2480.012	2.054	2478.985	2481.039	2400 - 2483.5MHz	Pass

OBW NVNT BLE 2402MHz

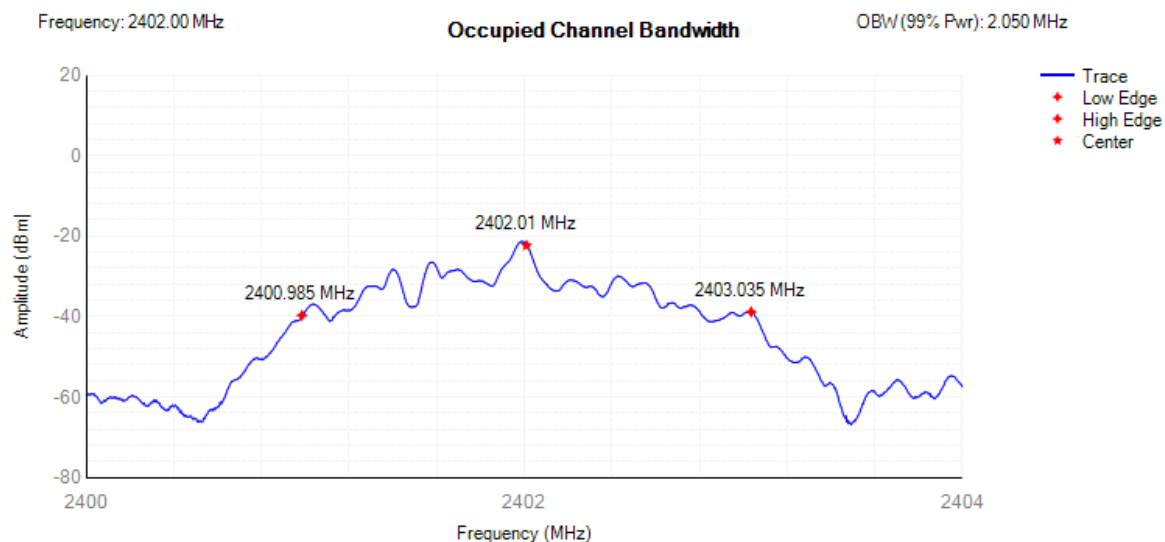

OBW NVNT BLE 2440MHz

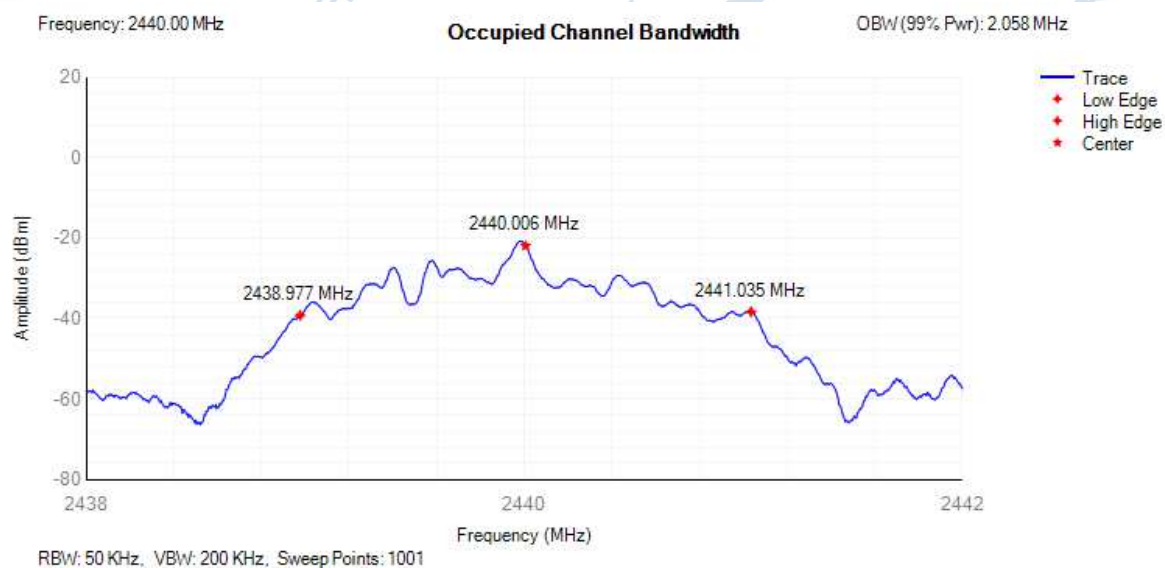


OBW NVNT BLE 2480MHz

Frequency: 2480.00 MHz

Occupied Channel Bandwidth

OBW (99% Pwr): 2.054 MHz

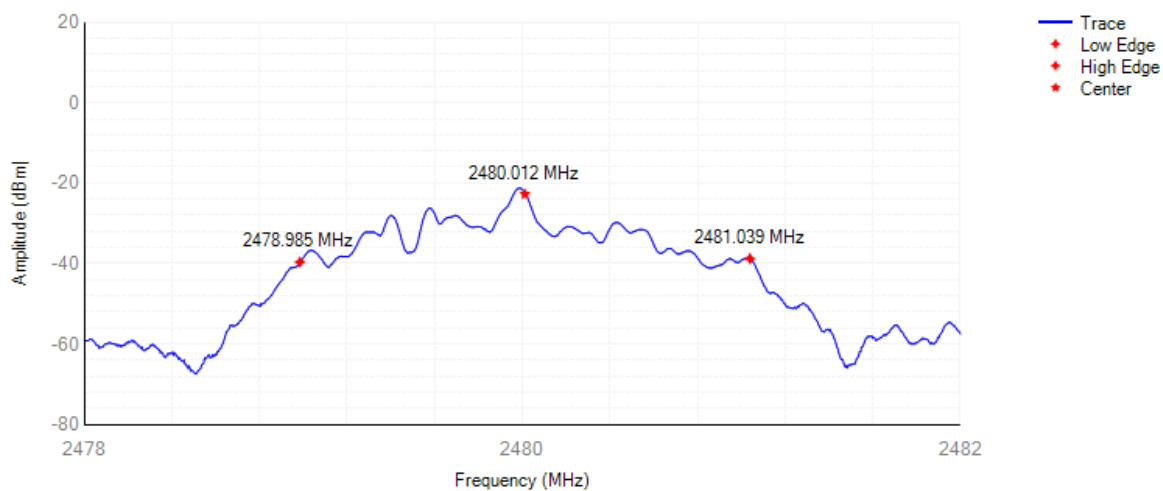


RBW: 50 KHz, VBW: 200 KHz, Sweep Points: 1001


4.10 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	2399.5	-63.07	-10	Pass
NVNT	BLE	2402	2398.5	-60.19	-10	Pass
NVNT	BLE	2402	2398.45	-52.93	-10	Pass
NVNT	BLE	2402	2397.45	-63.07	-20	Pass
NVNT	BLE	2402	2396.45	-62.35	-20	Pass
NVNT	BLE	2402	2396.4	-63.52	-20	Pass
NVNT	BLE	2480	2484	-53.9	-10	Pass
NVNT	BLE	2480	2485	-63.15	-10	Pass
NVNT	BLE	2480	2485.054	-63.55	-10	Pass
NVNT	BLE	2480	2486.054	-63.71	-20	Pass
NVNT	BLE	2480	2487.054	-62.85	-20	Pass
NVNT	BLE	2480	2487.108	-63.07	-20	Pass

Tx. Emissions OOB NVNT BLE 2402MHz

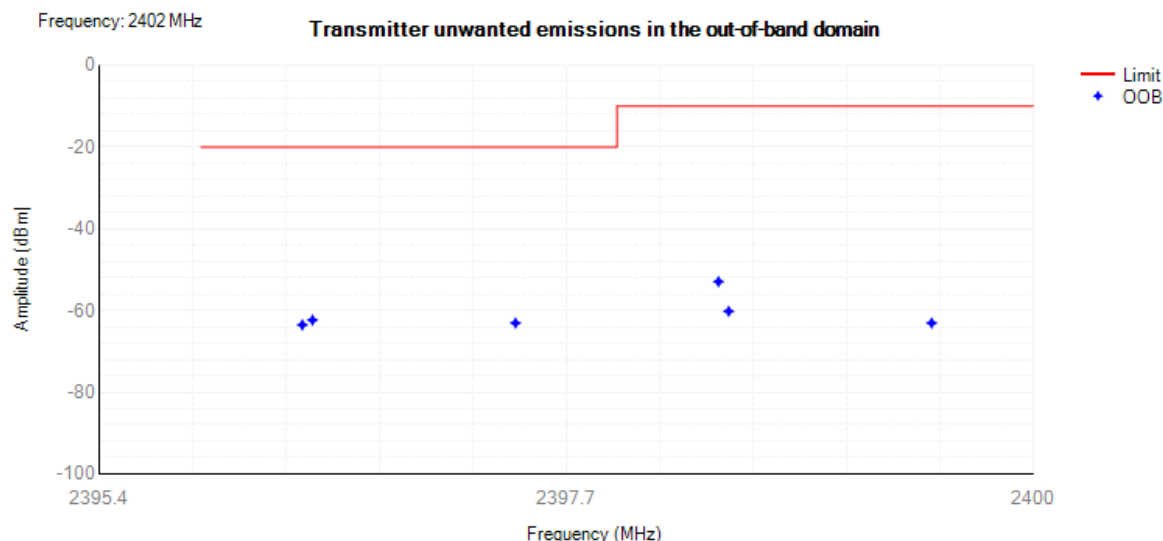

Tx. Emissions OOB NVNT BLE 2480MHz

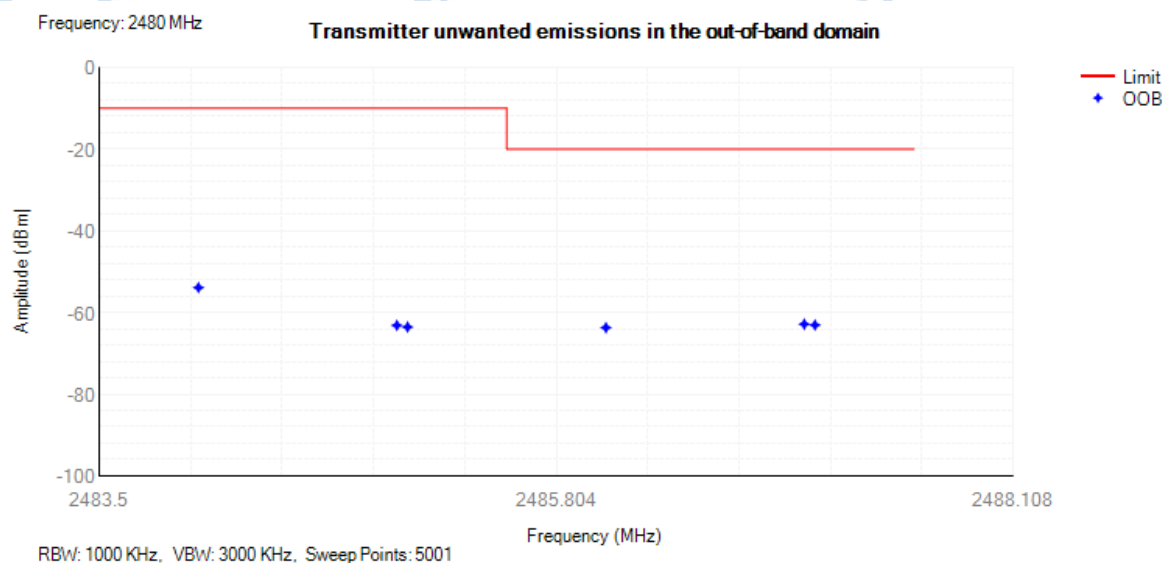


4.11 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -47 MHz	36.1	-66.61	NA	-36	Pass
NVNT	BLE	2402	47 MHz -74 MHz	73.25	-66.41	NA	-54	Pass
NVNT	BLE	2402	74 MHz -87.5 MHz	79.75	-64.66	NA	-36	Pass
NVNT	BLE	2402	87.5 MHz -118 MHz	113.65	-65.66	NA	-54	Pass
NVNT	BLE	2402	118 MHz -174 MHz	136.35	-65.38	NA	-36	Pass
NVNT	BLE	2402	174 MHz -230 MHz	211.75	-64.66	NA	-54	Pass
NVNT	BLE	2402	230 MHz -470 MHz	384.7	-64.71	NA	-36	Pass
NVNT	BLE	2402	470 MHz -694 MHz	648.35	-64.88	NA	-54	Pass
NVNT	BLE	2402	694 MHz -1000 MHz	933.45	-63.5	NA	-36	Pass
NVNT	BLE	2402	1000 MHz -2396 MHz	2274.5	-47.38	NA	-30	Pass
NVNT	BLE	2402	2487.5 MHz -12750 MHz	6976	-44.07	NA	-30	Pass
NVNT	BLE	2440	30 MHz -47 MHz	40.35	-66.24	NA	-36	Pass
NVNT	BLE	2440	47 MHz -74 MHz	55.4	-65.39	NA	-54	Pass
NVNT	BLE	2440	74 MHz -87.5 MHz	79.9	-66.88	NA	-36	Pass
NVNT	BLE	2440	87.5 MHz -118 MHz	114.8	-66.33	NA	-54	Pass
NVNT	BLE	2440	118 MHz -174 MHz	139	-64.8	NA	-36	Pass
NVNT	BLE	2440	174 MHz -230 MHz	220.75	-64.25	NA	-54	Pass
NVNT	BLE	2440	230 MHz -470 MHz	311.9	-64.84	NA	-36	Pass
NVNT	BLE	2440	470 MHz -694 MHz	481.65	-64.52	NA	-54	Pass
NVNT	BLE	2440	694 MHz -1000 MHz	975.8	-63.97	NA	-36	Pass
NVNT	BLE	2440	1000 MHz -2396 MHz	2311.5	-47.01	NA	-30	Pass
NVNT	BLE	2440	2487.5 MHz -12750 MHz	6954	-44.89	NA	-30	Pass
NVNT	BLE	2480	30 MHz -47 MHz	39.25	-65.11	NA	-36	Pass
NVNT	BLE	2480	47 MHz -74 MHz	62.25	-66.78	NA	-54	Pass
NVNT	BLE	2480	74 MHz -87.5 MHz	81.55	-66.53	NA	-36	Pass
NVNT	BLE	2480	87.5 MHz -118 MHz	90.25	-64.48	NA	-54	Pass
NVNT	BLE	2480	118 MHz -174 MHz	158.3	-65.18	NA	-36	Pass
NVNT	BLE	2480	174 MHz -230 MHz	193.1	-65.42	NA	-54	Pass
NVNT	BLE	2480	230 MHz -470 MHz	296.95	-64.46	NA	-36	Pass
NVNT	BLE	2480	470 MHz -694 MHz	580.95	-64.55	NA	-54	Pass
NVNT	BLE	2480	694 MHz -1000 MHz	830.7	-64.08	NA	-36	Pass
NVNT	BLE	2480	1000 MHz -2396 MHz	2351	-48.68	NA	-30	Pass
NVNT	BLE	2480	2487.5 MHz -12750 MHz	6870	-45.01	NA	-30	Pass

Tx. Spurious NVNT BLE 2402MHz

Frequency: 2402 MHz


Transmitter unwanted emissions in the spurious domain

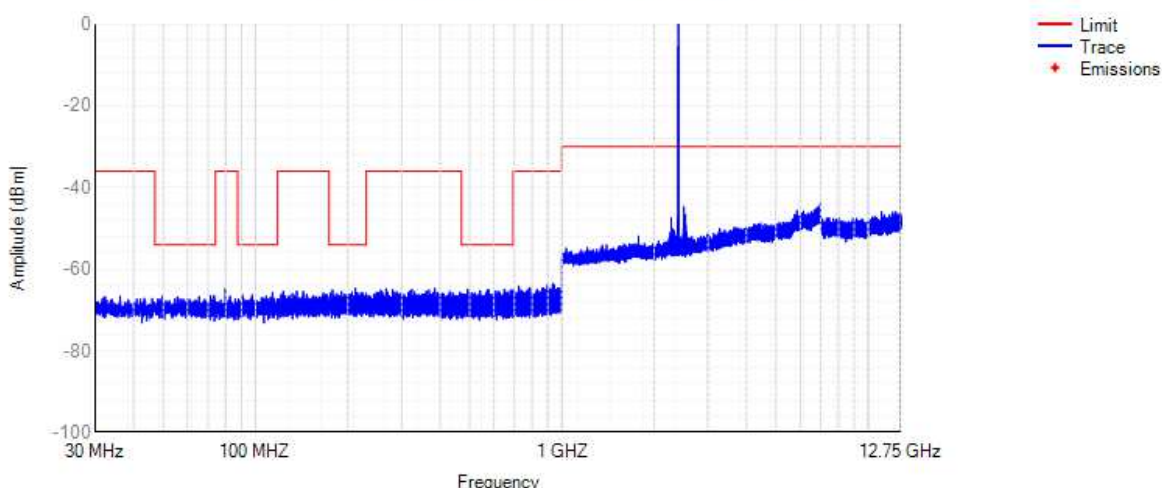

Tx. Spurious NVNT BLE 2440MHz

Frequency: 2440 MHz


Transmitter unwanted emissions in the spurious domain

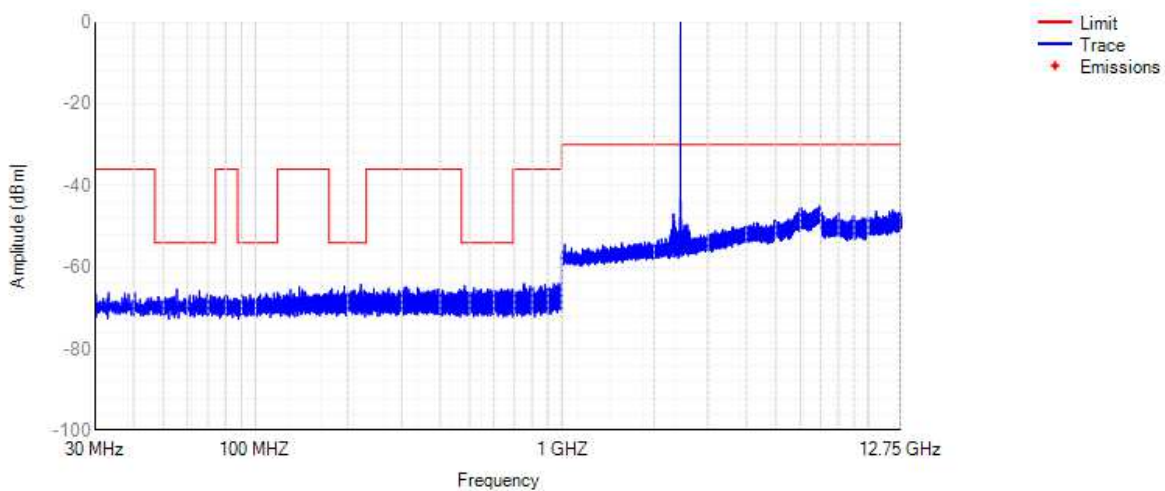

Tx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz


Transmitter unwanted emissions in the spurious domain

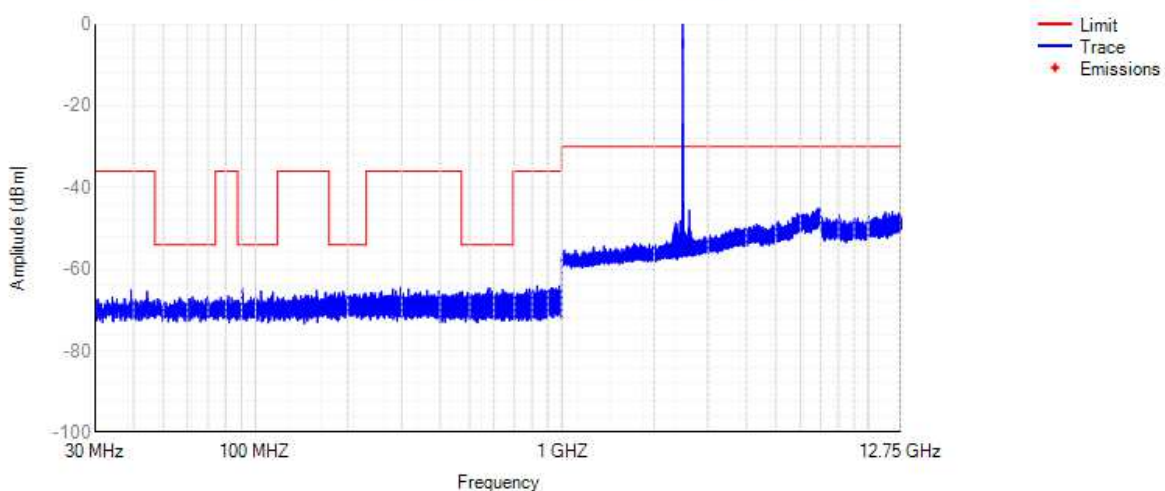


4.12 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -1000 MHz	485.65	-73.97	NA	-57	Pass
NVNT	BLE	2402	1000 MHz -12750 MHz	6705	-55.9	NA	-47	Pass
NVNT	BLE	2440	30 MHz -1000 MHz	978.85	-73.11	NA	-57	Pass
NVNT	BLE	2440	1000 MHz -12750 MHz	6954.5	-54.96	NA	-47	Pass
NVNT	BLE	2480	30 MHz -1000 MHz	989.3	-74.12	NA	-57	Pass
NVNT	BLE	2480	1000 MHz -12750 MHz	2541.5	-49.81	-69.28	-47	Pass

Rx. Spurious NVNT BLE 2402MHz

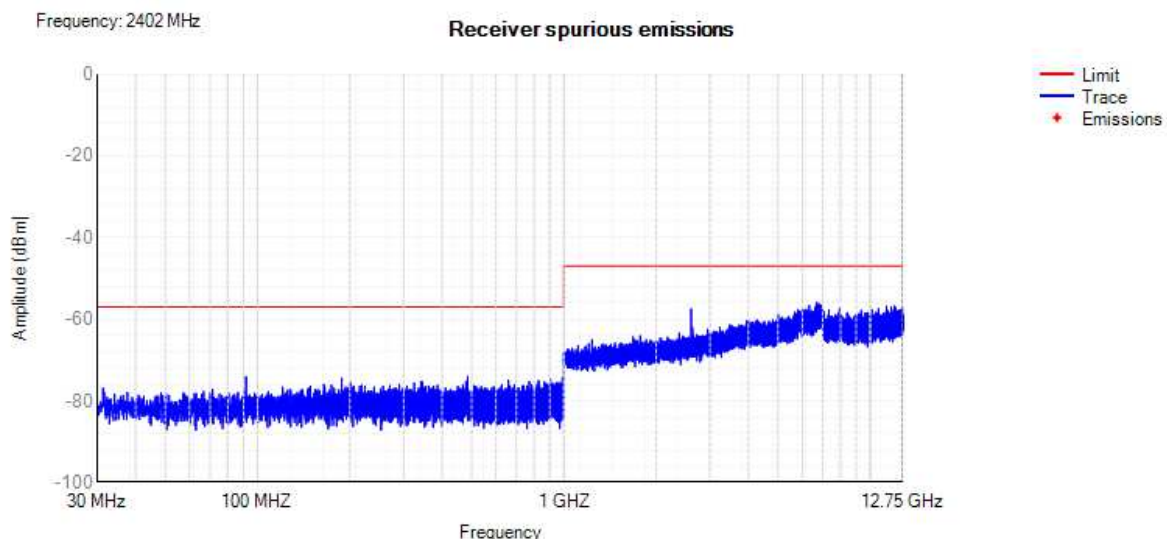


Rx. Spurious NVNT BLE 2440MHz

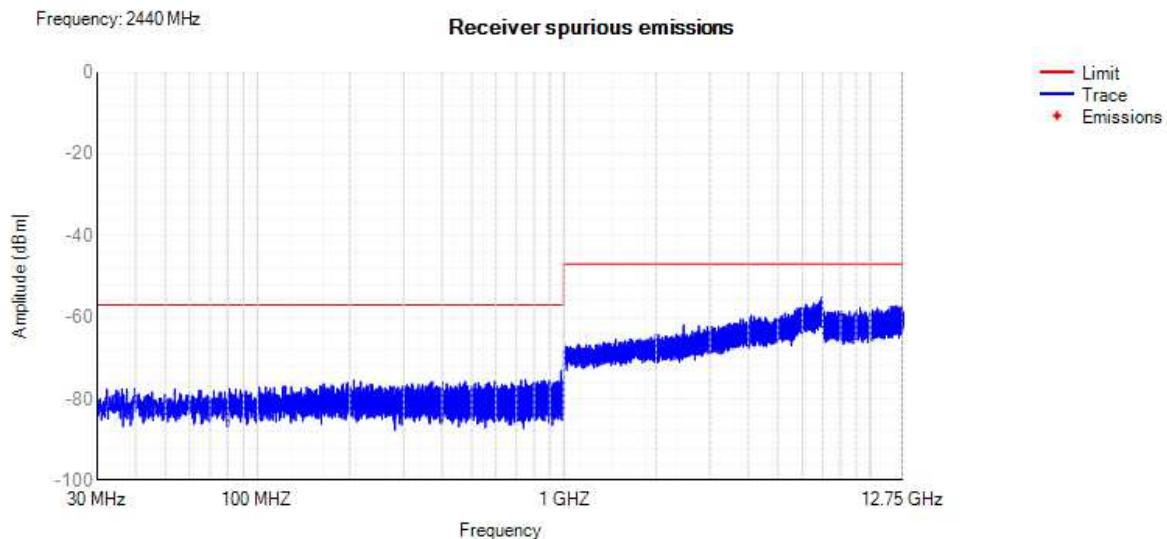

Rx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz

Receiver spurious emissions

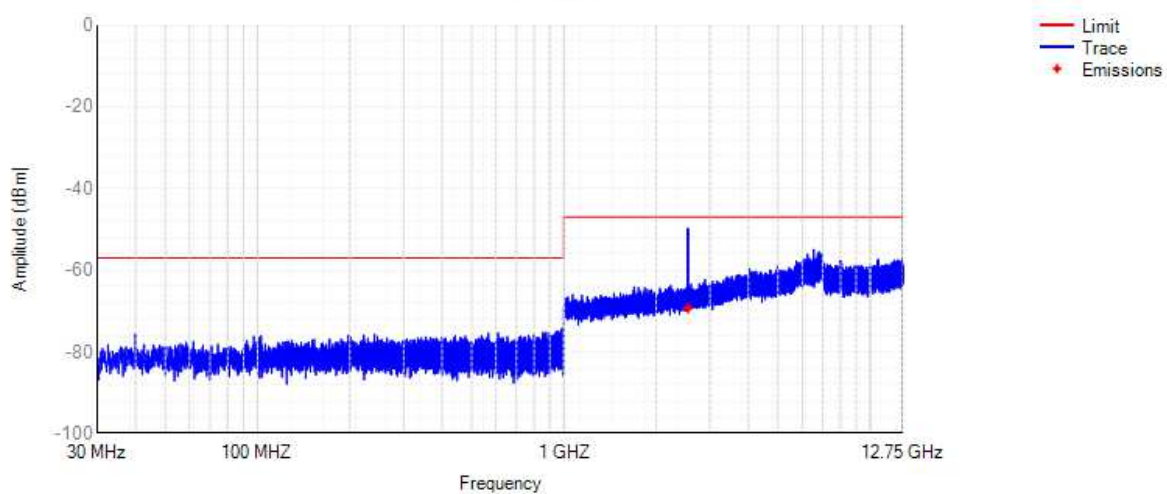


Module 4

1M


4.1 RF Output Power

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	0.71	240	5.71	20	Pass
NVNT	BLE	2440	2.33	240	7.33	20	Pass
NVNT	BLE	2480	1.38	240	6.38	20	Pass
NVLT	BLE	2402	-0.14	240	4.86	20	Pass
NVLT	BLE	2440	1.55	240	6.55	20	Pass
NVLT	BLE	2480	0.84	240	5.84	20	Pass
NVHT	BLE	2402	-0.2	240	4.8	20	Pass
NVHT	BLE	2440	1.65	240	6.65	20	Pass
NVHT	BLE	2480	1.04	240	6.04	20	Pass


Power NVNT BLE 2402MHz

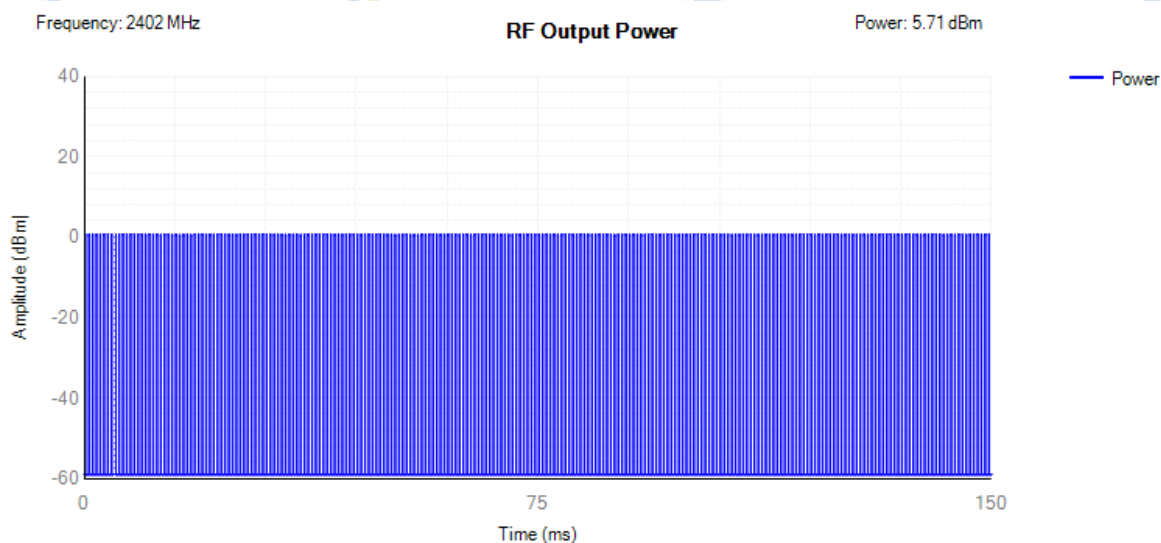

Power NVNT BLE 2440MHz

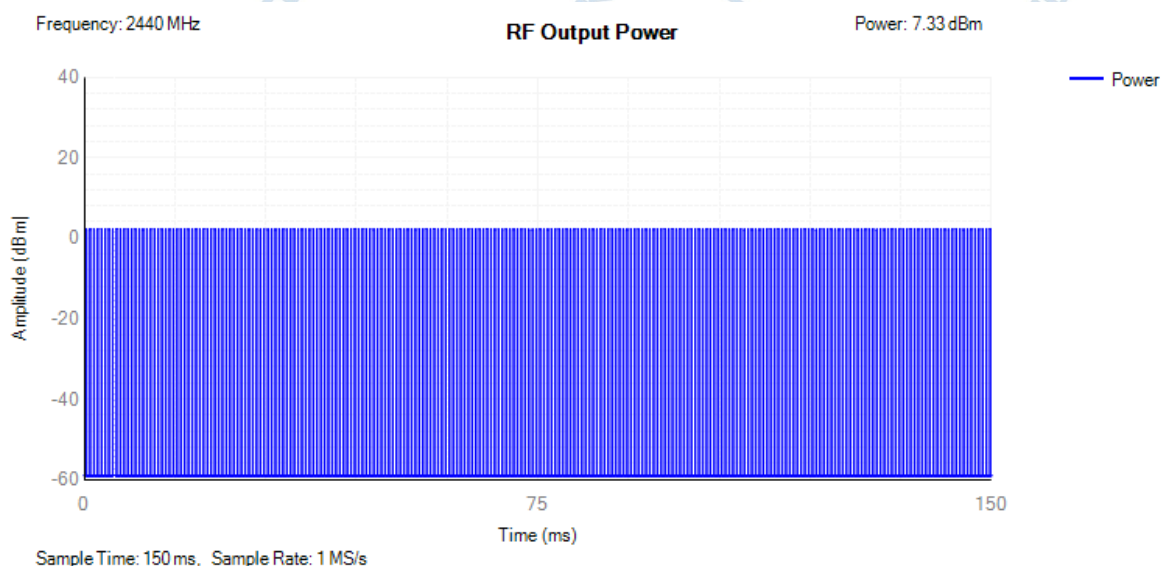


Power NVNT BLE 2480MHz

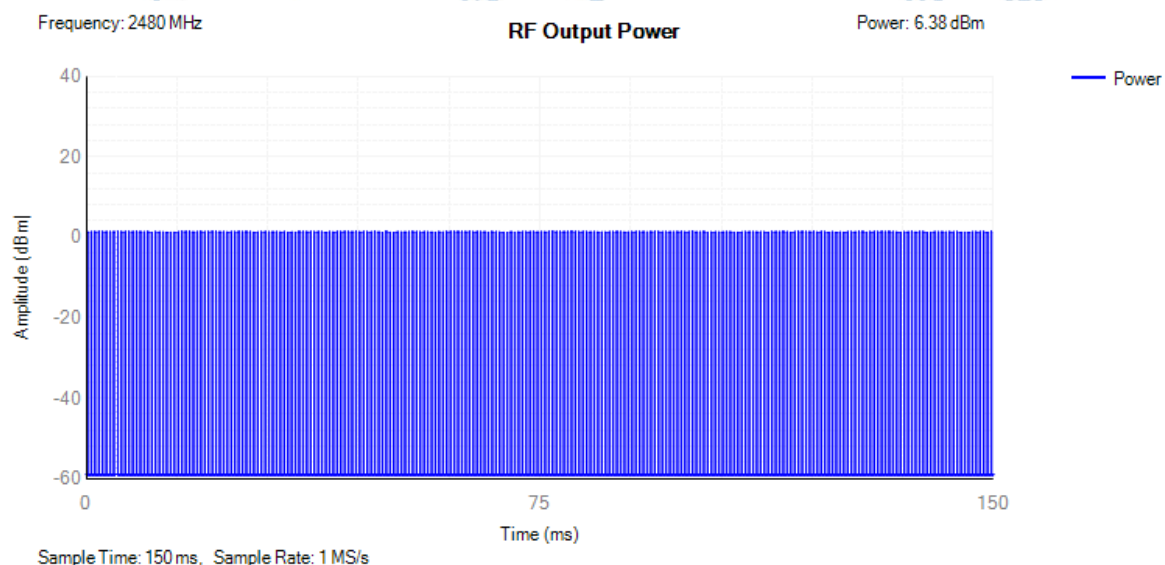


4.2 Power Spectral Density


Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	5.62	10	Pass
NVNT	BLE	2440	7.25	10	Pass
NVNT	BLE	2480	6.29	10	Pass

PSD NVNT BLE 2402MHz

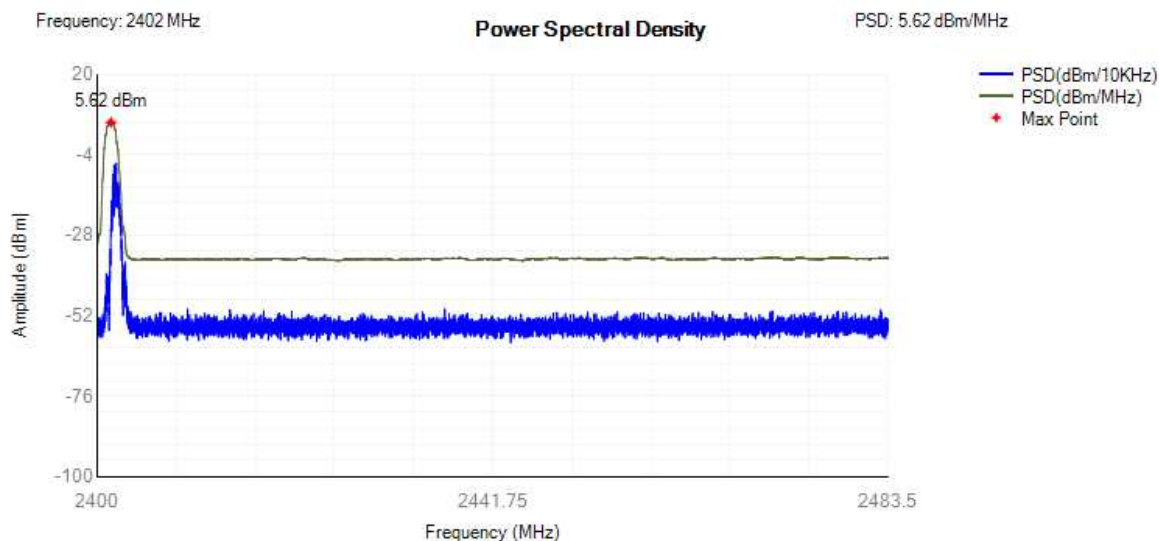

PSD NVNT BLE 2440MHz

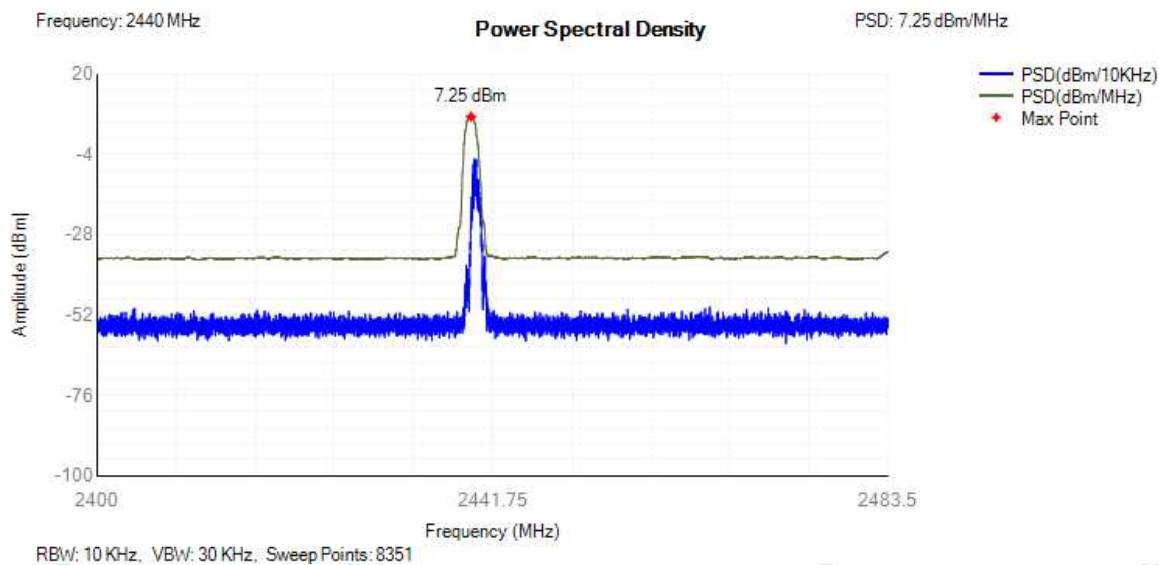


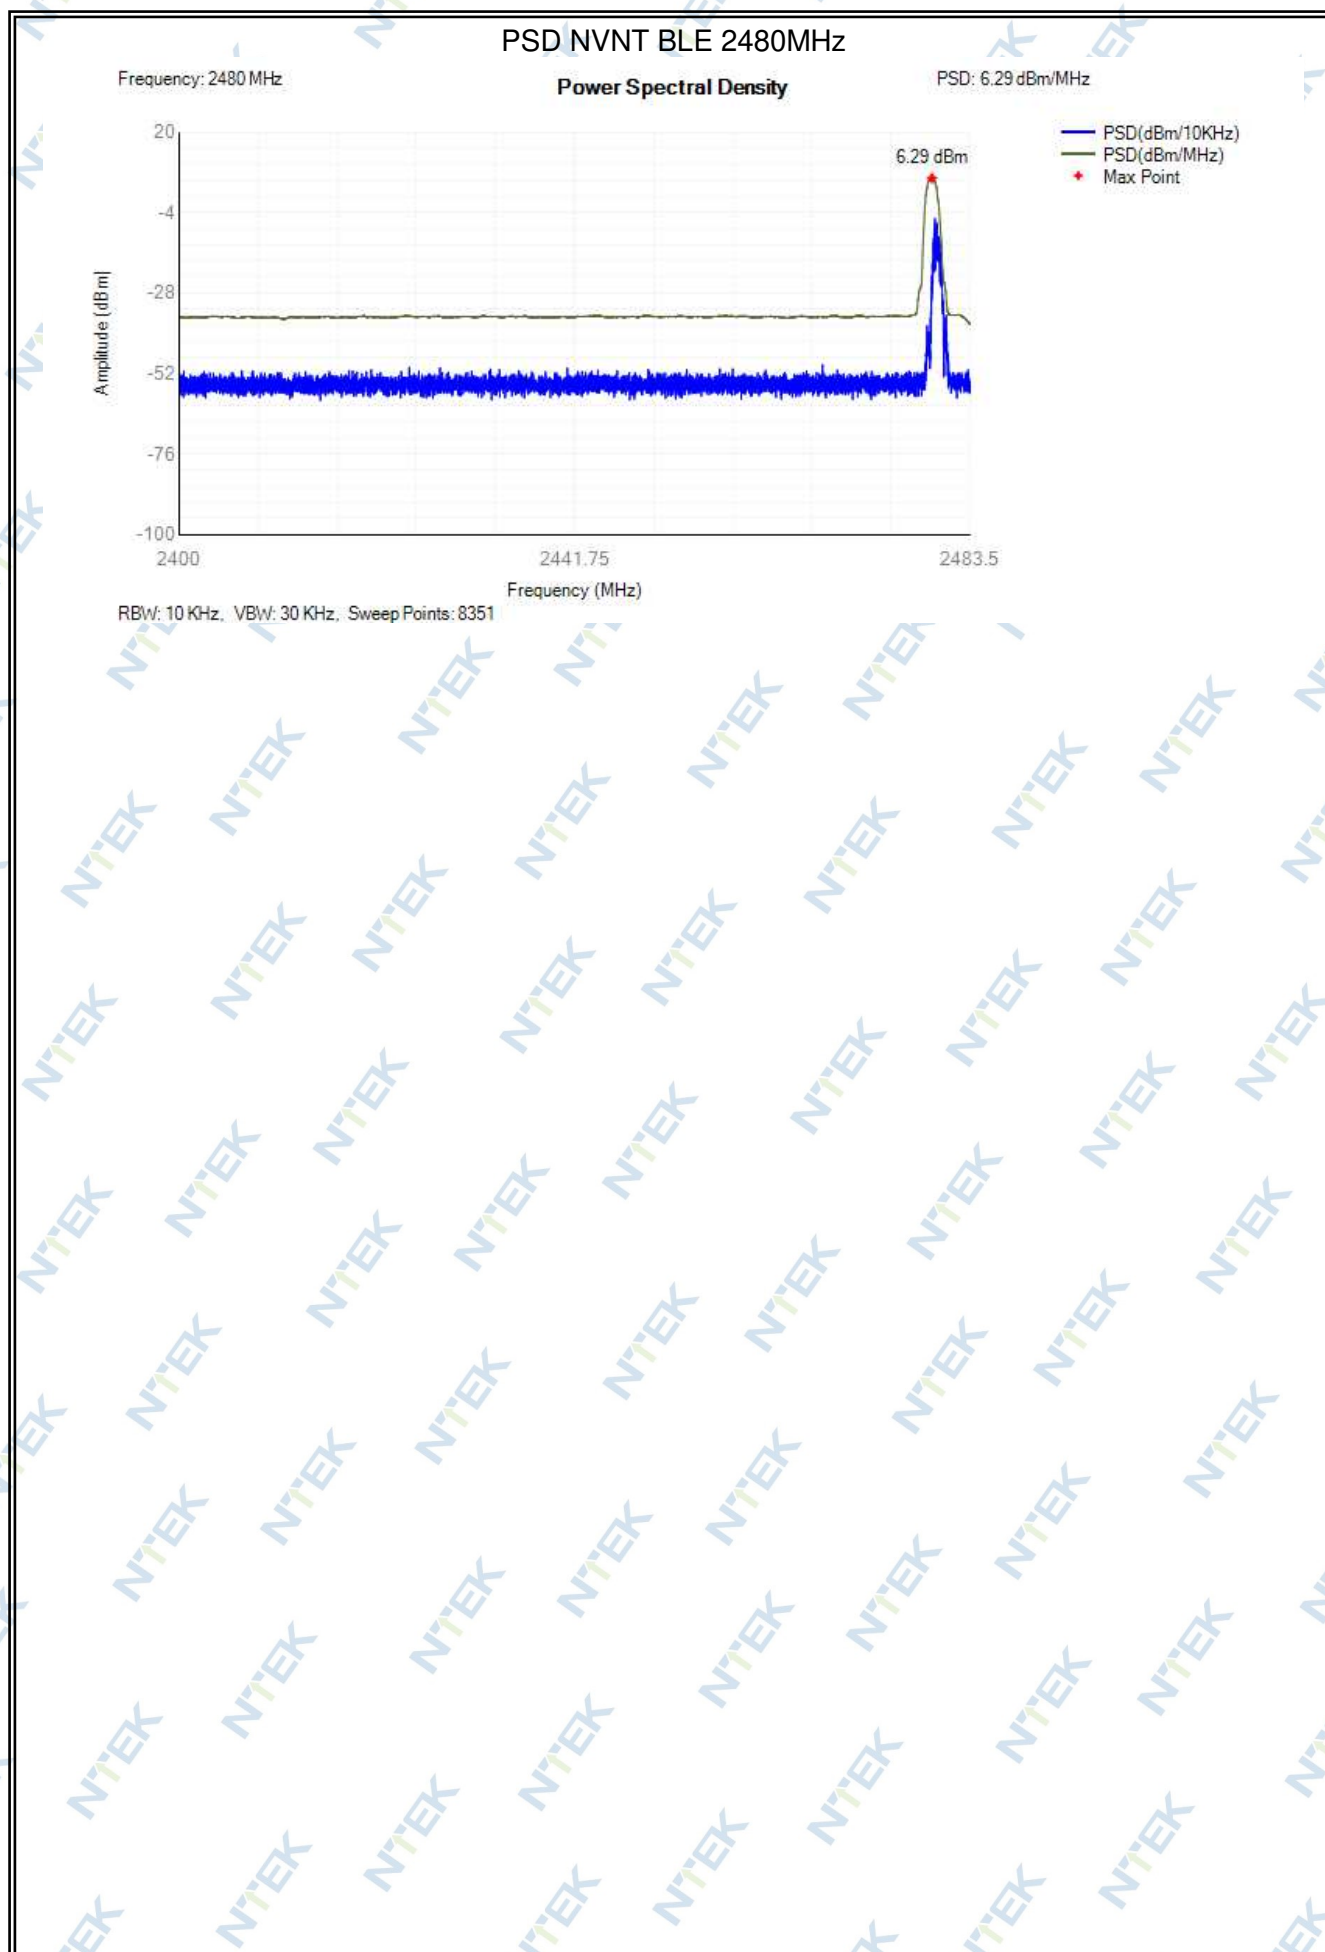


4.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	BLE	2402	2402.002	1.027	2401.489	2402.515	2400 - 2483.5MHz	Pass
NVNT	BLE	2440	2440	1.027	2439.487	2440.513	2400 - 2483.5MHz	Pass
NVNT	BLE	2480	2480.001	1.029	2479.487	2480.515	2400 - 2483.5MHz	Pass

OBW NVNT BLE 2402MHz

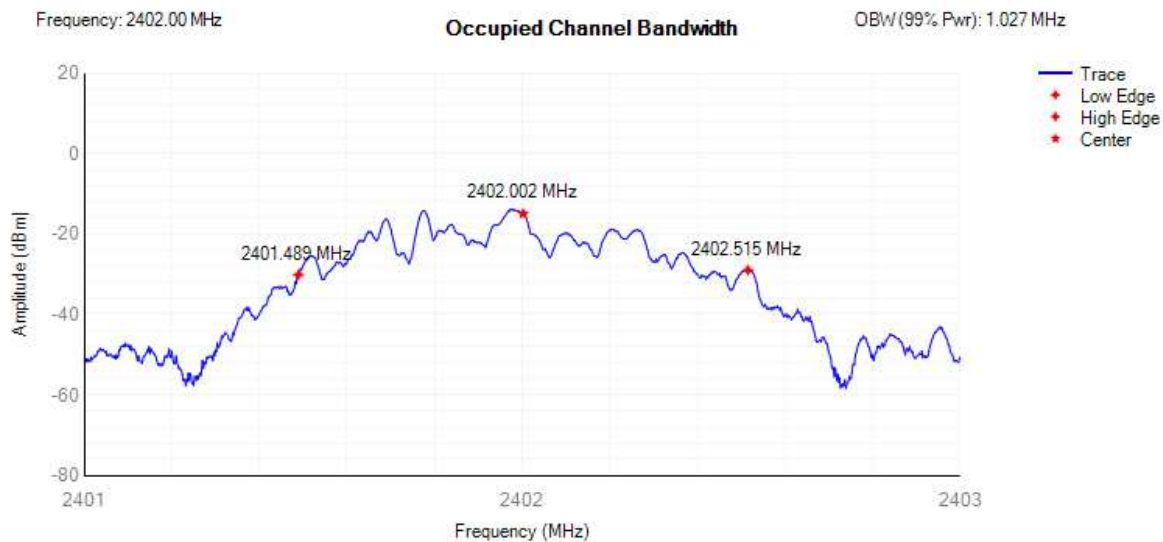

OBW NVNT BLE 2440MHz

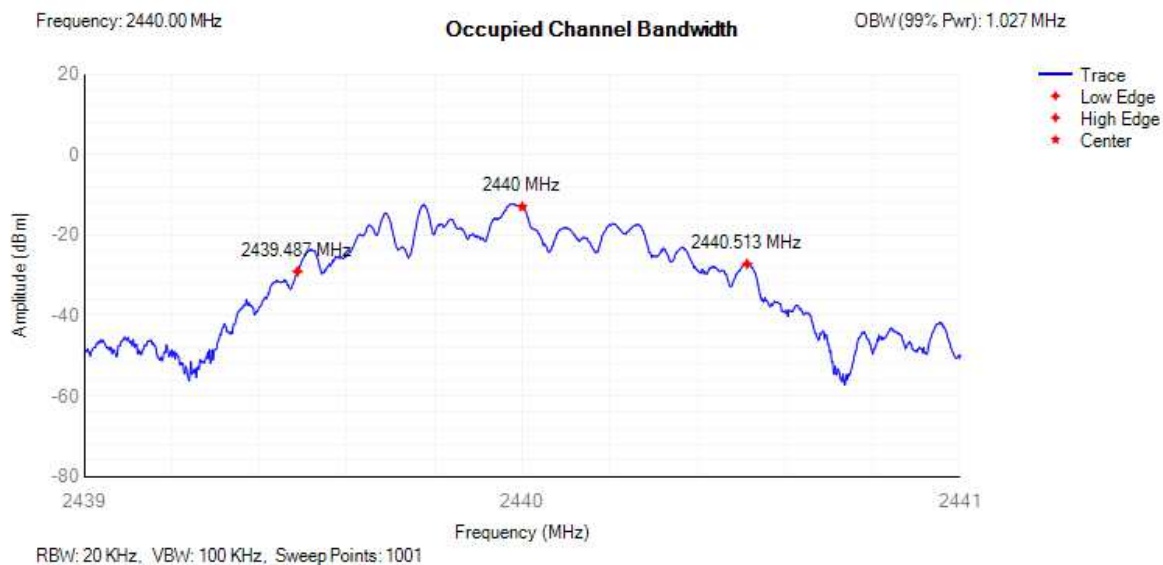


OBW NVNT BLE 2480MHz

Frequency: 2480.00 MHz

Occupied Channel Bandwidth

OBW (99% Pwr): 1.029 MHz

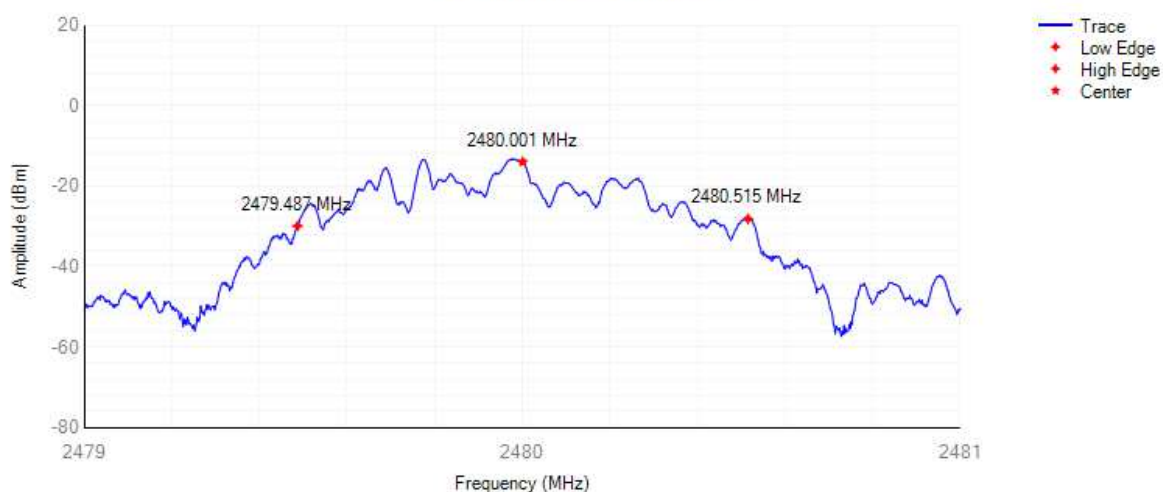


RBW: 20 KHz, VBW: 100 KHz, Sweep Points: 1001


4.4 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	2399.5	-49.96	-10	Pass
NVNT	BLE	2402	2399.473	-63.2	-10	Pass
NVNT	BLE	2402	2398.473	-63.43	-20	Pass
NVNT	BLE	2402	2398.446	-58.48	-20	Pass
NVNT	BLE	2480	2484	-54.89	-10	Pass
NVNT	BLE	2480	2484.029	-56.7	-10	Pass
NVNT	BLE	2480	2485.029	-63.18	-20	Pass
NVNT	BLE	2480	2485.058	-63.46	-20	Pass

Tx. Emissions OOB NVNT BLE 2402MHz

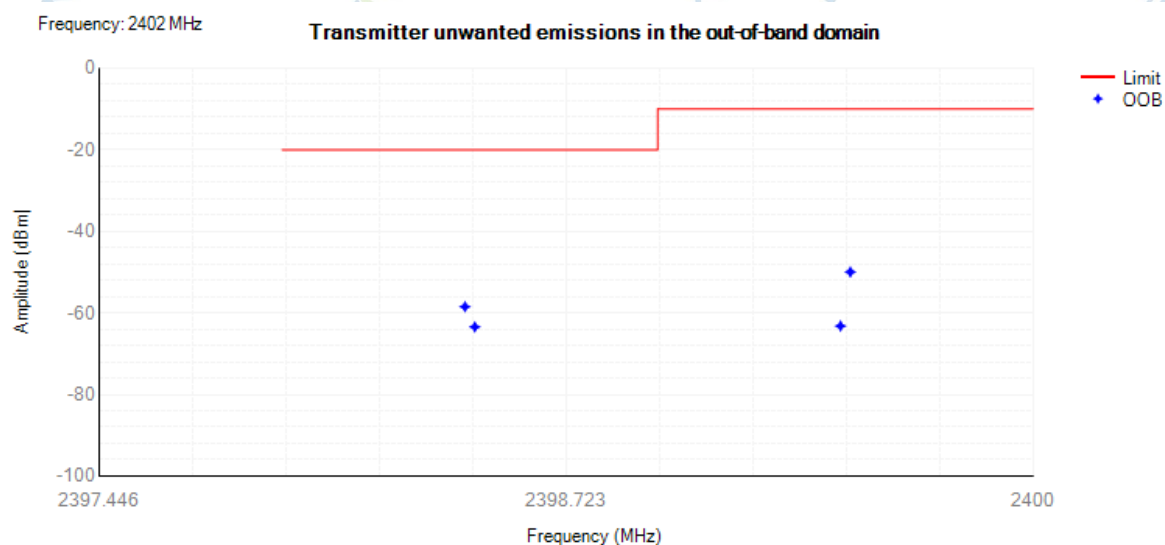

Tx. Emissions OOB NVNT BLE 2480MHz

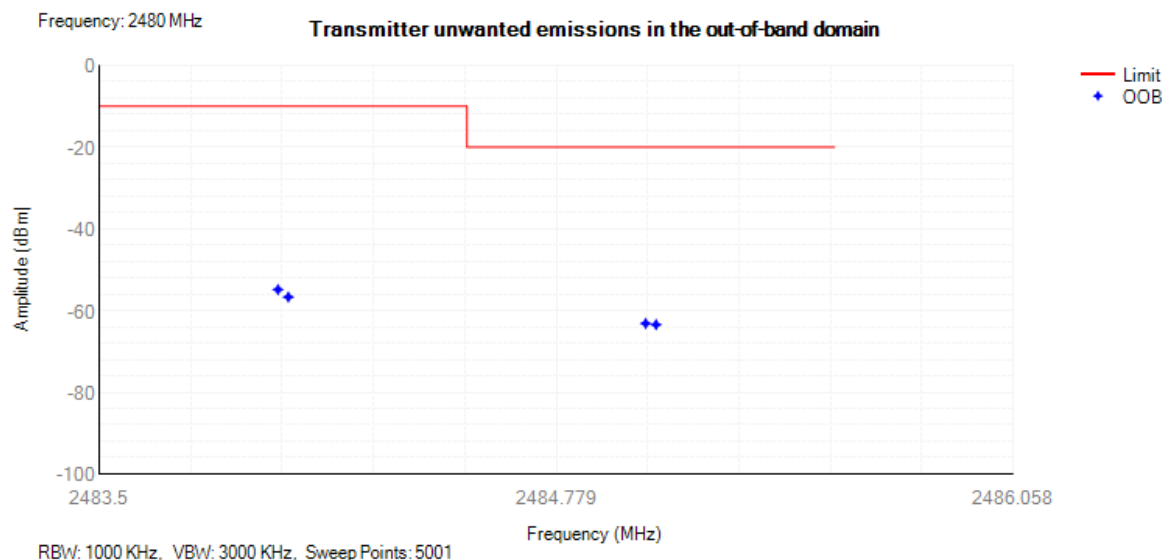


4.5 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -47 MHz	45.6	-65.46	NA	-36	Pass
NVNT	BLE	2402	47 MHz -74 MHz	54.8	-65.45	NA	-54	Pass
NVNT	BLE	2402	74 MHz -87.5 MHz	86.5	-66.74	NA	-36	Pass
NVNT	BLE	2402	87.5 MHz -118 MHz	94.7	-65.79	NA	-54	Pass
NVNT	BLE	2402	118 MHz -174 MHz	167.6	-65.2	NA	-36	Pass
NVNT	BLE	2402	174 MHz -230 MHz	204.05	-65.17	NA	-54	Pass
NVNT	BLE	2402	230 MHz -470 MHz	341.1	-63.96	NA	-36	Pass
NVNT	BLE	2402	470 MHz -694 MHz	505.15	-64.29	NA	-54	Pass
NVNT	BLE	2402	694 MHz -1000 MHz	856.5	-63.47	NA	-36	Pass
NVNT	BLE	2402	1000 MHz -2398 MHz	2396	-46.87	NA	-30	Pass
NVNT	BLE	2402	2485.5 MHz -12750 MHz	6771	-45.19	NA	-30	Pass
NVNT	BLE	2440	30 MHz -47 MHz	33.85	-65.82	NA	-36	Pass
NVNT	BLE	2440	47 MHz -74 MHz	61.6	-66.41	NA	-54	Pass
NVNT	BLE	2440	74 MHz -87.5 MHz	76.35	-65.33	NA	-36	Pass
NVNT	BLE	2440	87.5 MHz -118 MHz	104.85	-65.38	NA	-54	Pass
NVNT	BLE	2440	118 MHz -174 MHz	154.95	-64.88	NA	-36	Pass
NVNT	BLE	2440	174 MHz -230 MHz	176.6	-65.44	NA	-54	Pass
NVNT	BLE	2440	230 MHz -470 MHz	314.05	-64.2	NA	-36	Pass
NVNT	BLE	2440	470 MHz -694 MHz	516.45	-63.9	NA	-54	Pass
NVNT	BLE	2440	694 MHz -1000 MHz	781.45	-64.21	NA	-36	Pass
NVNT	BLE	2440	1000 MHz -2398 MHz	2312	-48.06	NA	-30	Pass
NVNT	BLE	2440	2485.5 MHz -12750 MHz	6923	-45.19	NA	-30	Pass
NVNT	BLE	2480	30 MHz -47 MHz	45.4	-65.42	NA	-36	Pass
NVNT	BLE	2480	47 MHz -74 MHz	58.05	-66.78	NA	-54	Pass
NVNT	BLE	2480	74 MHz -87.5 MHz	79.7	-66.39	NA	-36	Pass
NVNT	BLE	2480	87.5 MHz -118 MHz	103.2	-65.61	NA	-54	Pass
NVNT	BLE	2480	118 MHz -174 MHz	118.15	-64.98	NA	-36	Pass
NVNT	BLE	2480	174 MHz -230 MHz	204.25	-64.52	NA	-54	Pass
NVNT	BLE	2480	230 MHz -470 MHz	412.6	-64.59	NA	-36	Pass
NVNT	BLE	2480	470 MHz -694 MHz	622.6	-65.16	NA	-54	Pass
NVNT	BLE	2480	694 MHz -1000 MHz	880.25	-63.35	NA	-36	Pass
NVNT	BLE	2480	1000 MHz -2398 MHz	2351.5	-46.61	NA	-30	Pass
NVNT	BLE	2480	2485.5 MHz -12750 MHz	6956	-44.93	NA	-30	Pass

Tx. Spurious NVNT BLE 2402MHz

Frequency: 2402 MHz


Transmitter unwanted emissions in the spurious domain

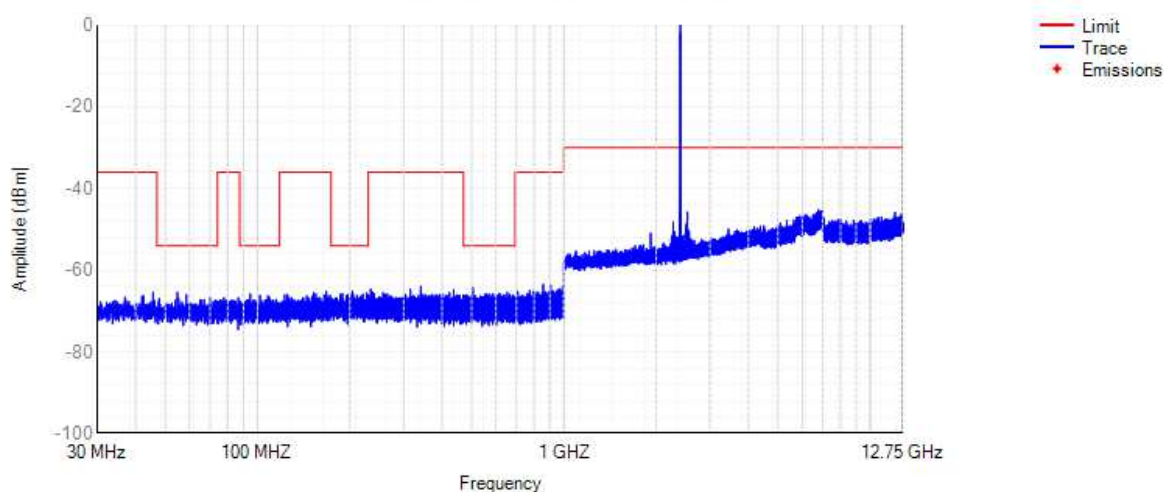

Tx. Spurious NVNT BLE 2440MHz

Frequency: 2440 MHz


Transmitter unwanted emissions in the spurious domain

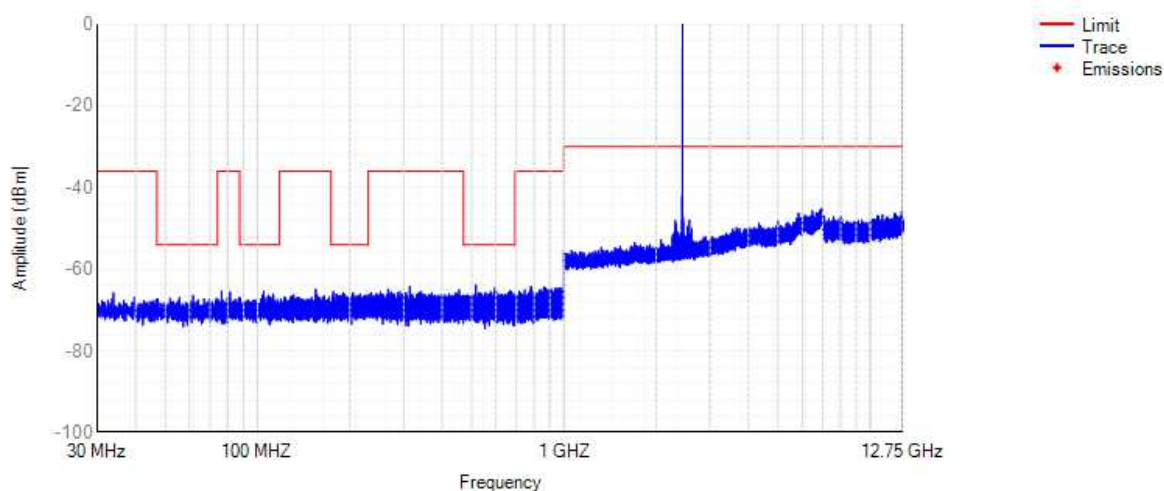

Tx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz


Transmitter unwanted emissions in the spurious domain

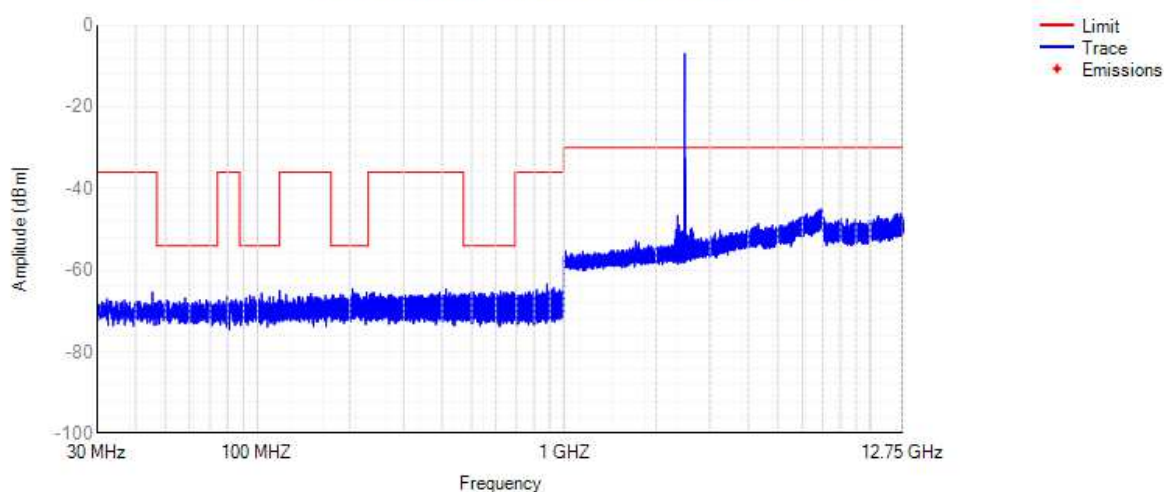


4.6 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -1000 MHz	865.946	-74.24	NA	-57	Pass
NVNT	BLE	2402	1000 MHz -12750 MHz	1963.5	-49.44	-71.97	-47	Pass
NVNT	BLE	2440	30 MHz -1000 MHz	957.3	-73.33	NA	-57	Pass
NVNT	BLE	2440	1000 MHz -12750 MHz	2598.5	-46.4	-66.99	-47	Pass
NVNT	BLE	2480	30 MHz -1000 MHz	910.3	-73.28	NA	-57	Pass
NVNT	BLE	2480	1000 MHz -12750 MHz	6914	-53.28	NA	-47	Pass

Rx. Spurious NVNT BLE 2402MHz

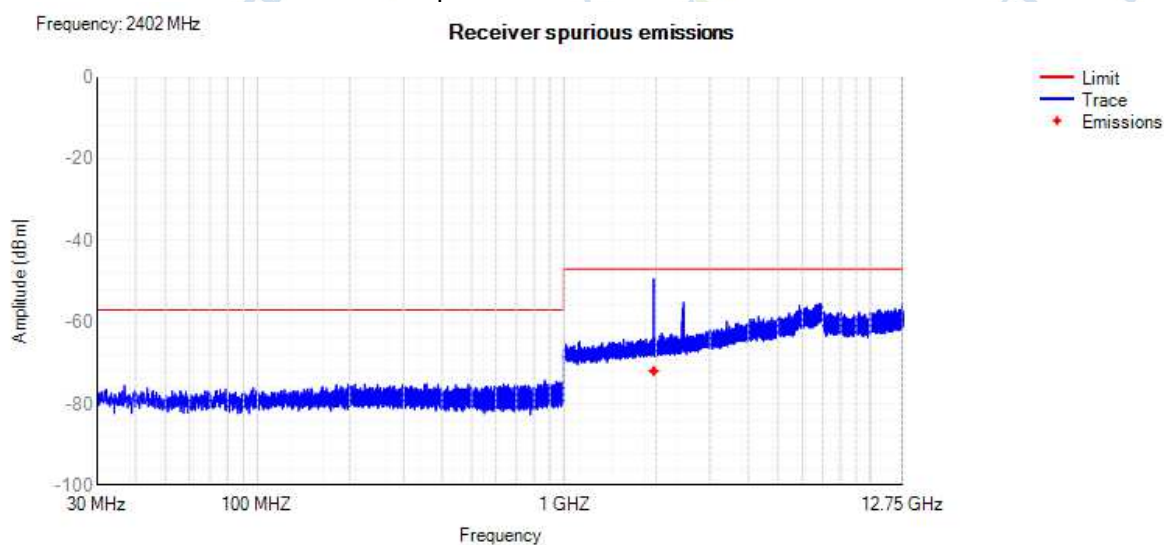


Rx. Spurious NVNT BLE 2440MHz

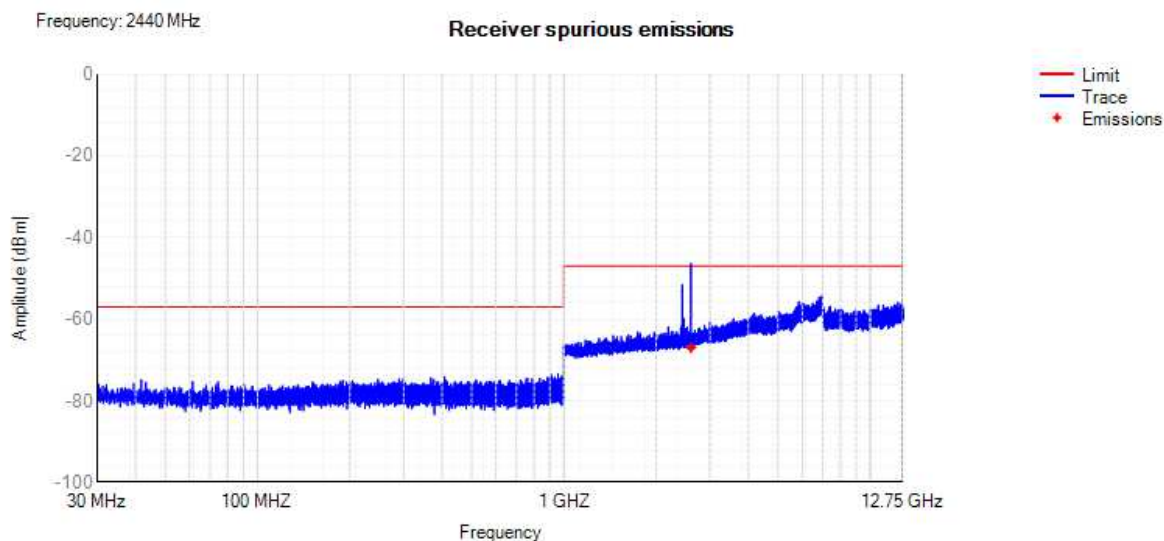

Rx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz

Receiver spurious emissions

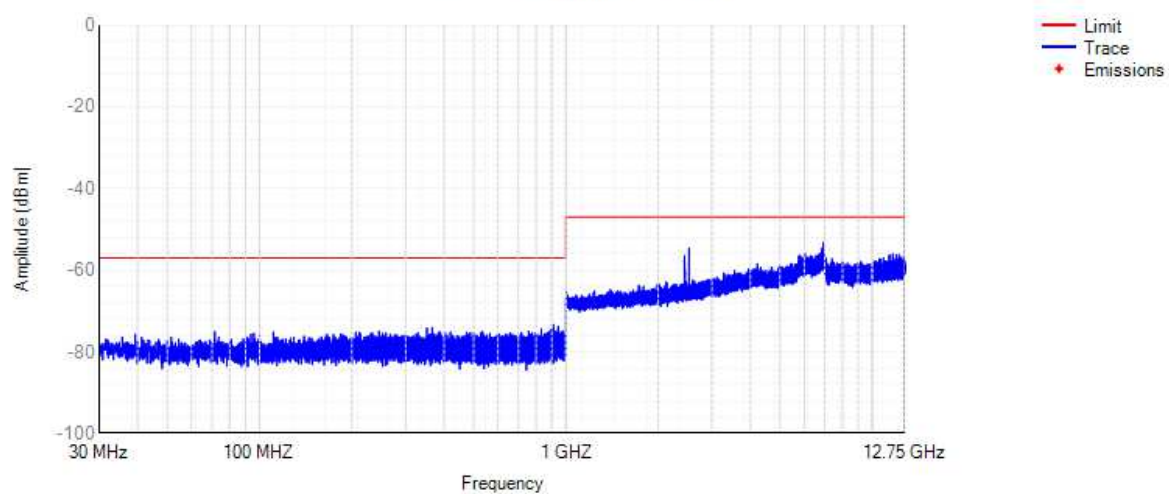


Module 4
2M


4.7 RF Output Power

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	1.06	161	6.06	20	Pass
NVNT	BLE	2440	0.53	161	5.53	20	Pass
NVNT	BLE	2480	0.71	160	5.71	20	Pass
NVLT	BLE	2402	0.21	160	5.21	20	Pass
NVLT	BLE	2440	-0.25	160	4.75	20	Pass
NVLT	BLE	2480	0.17	160	5.17	20	Pass
NVHT	BLE	2402	0.15	160	5.15	20	Pass
NVHT	BLE	2440	-0.15	160	4.85	20	Pass
NVHT	BLE	2480	0.37	160	5.37	20	Pass


Power NVNT BLE 2402MHz

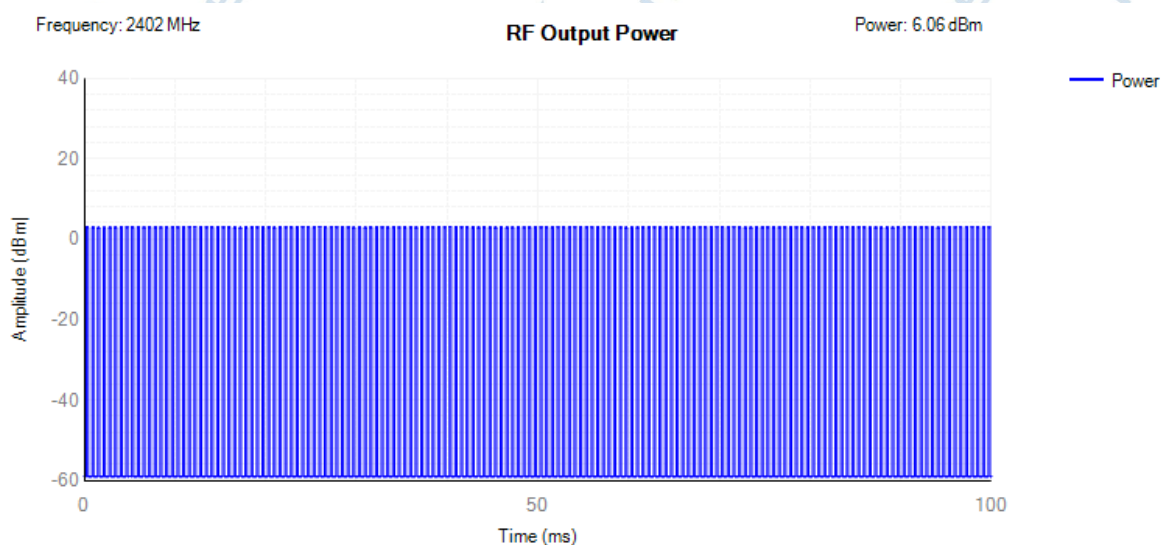

Power NVNT BLE 2440MHz

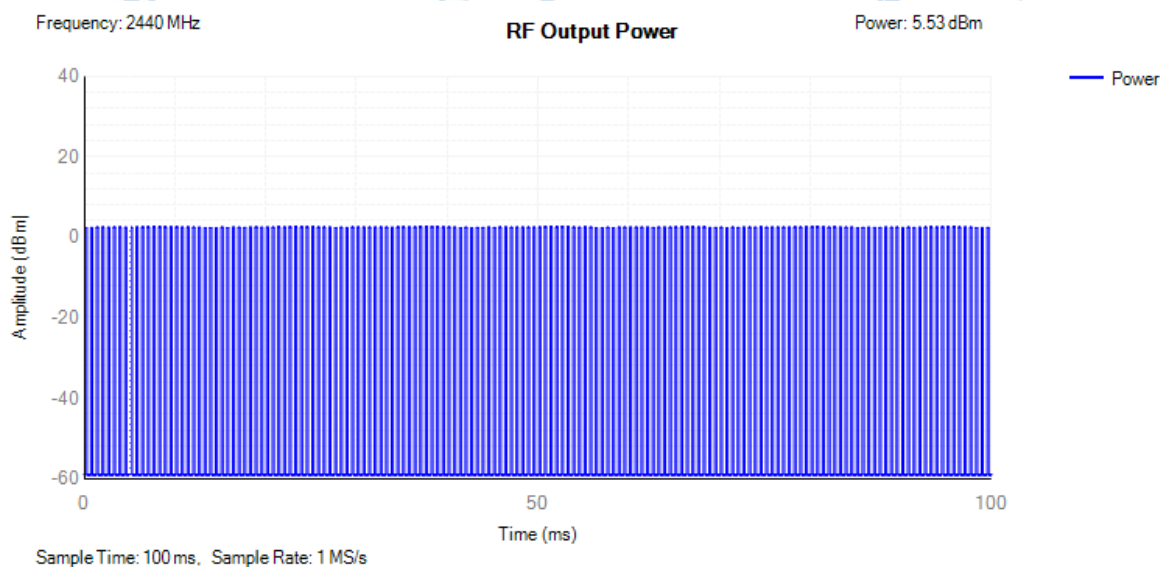


Power NVNT BLE 2480MHz

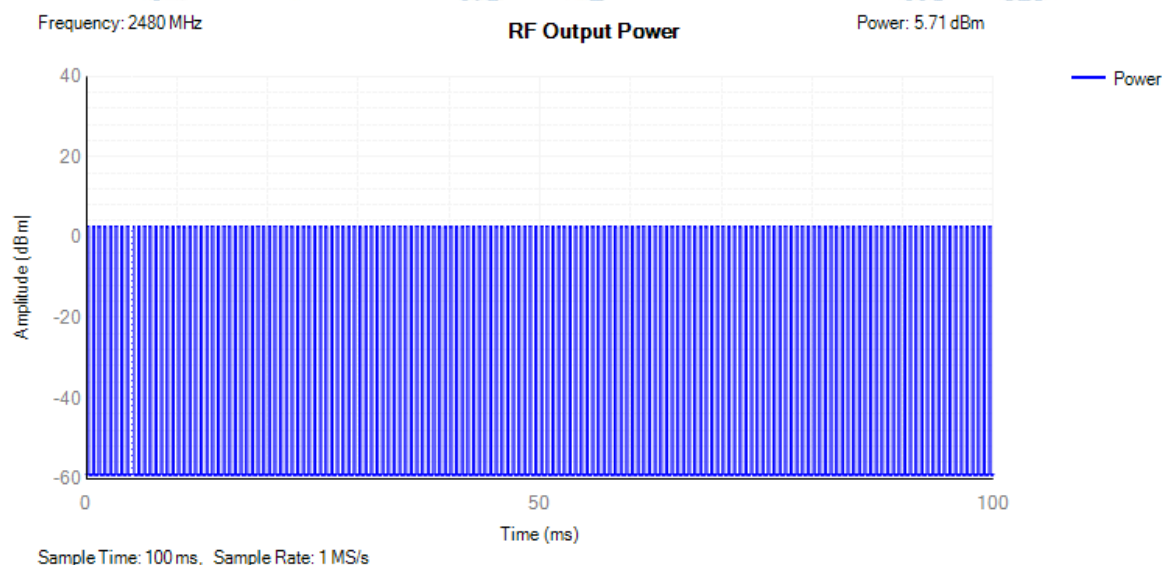


4.8 Power Spectral Density


Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	4.76	10	Pass
NVNT	BLE	2440	4.24	10	Pass
NVNT	BLE	2480	4.38	10	Pass

PSD NVNT BLE 2402MHz

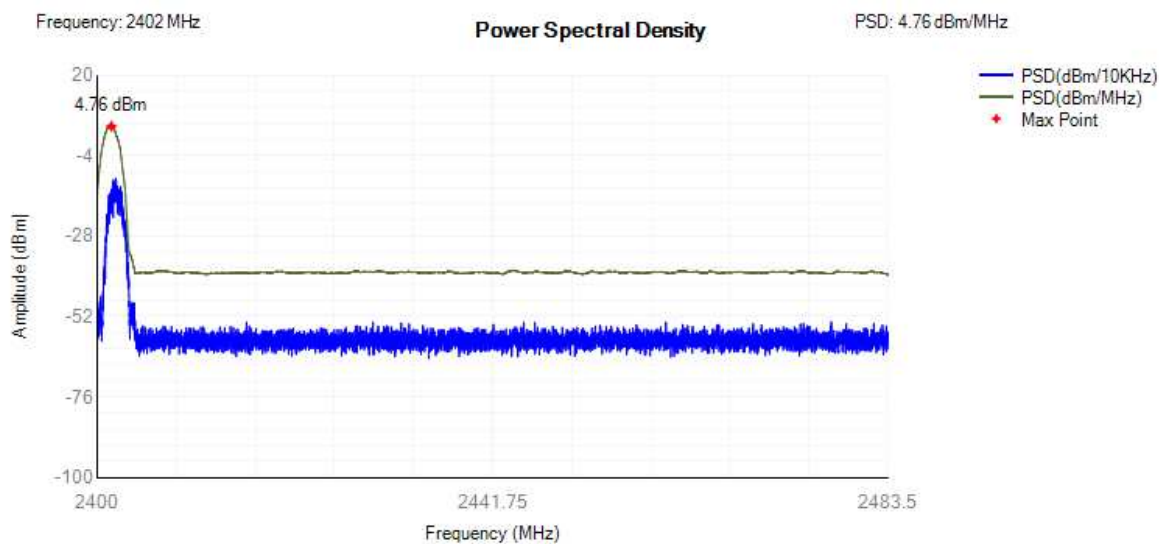

PSD NVNT BLE 2440MHz

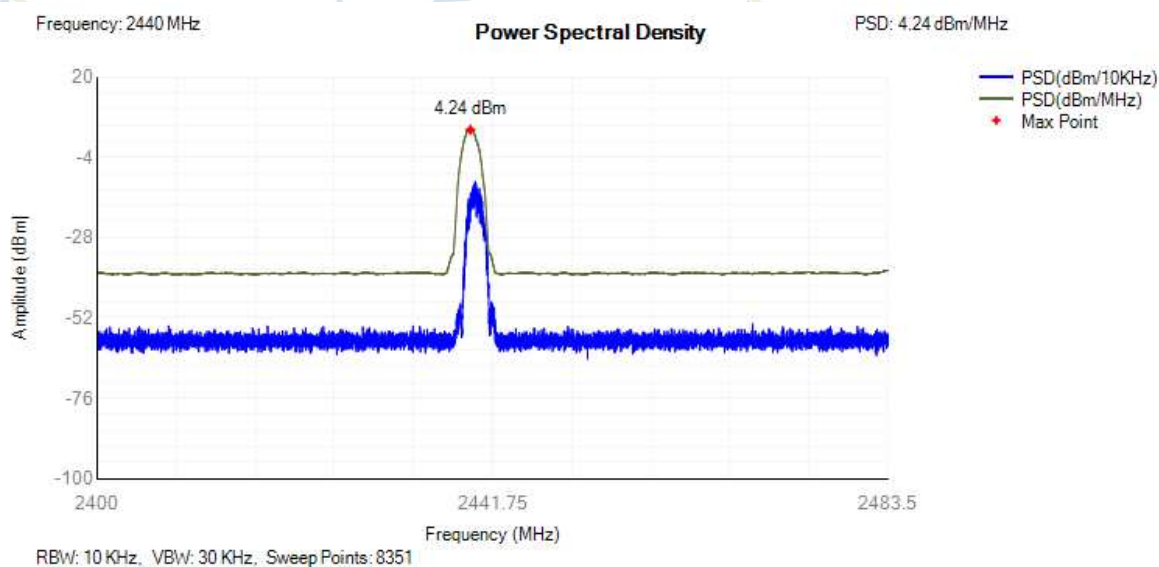


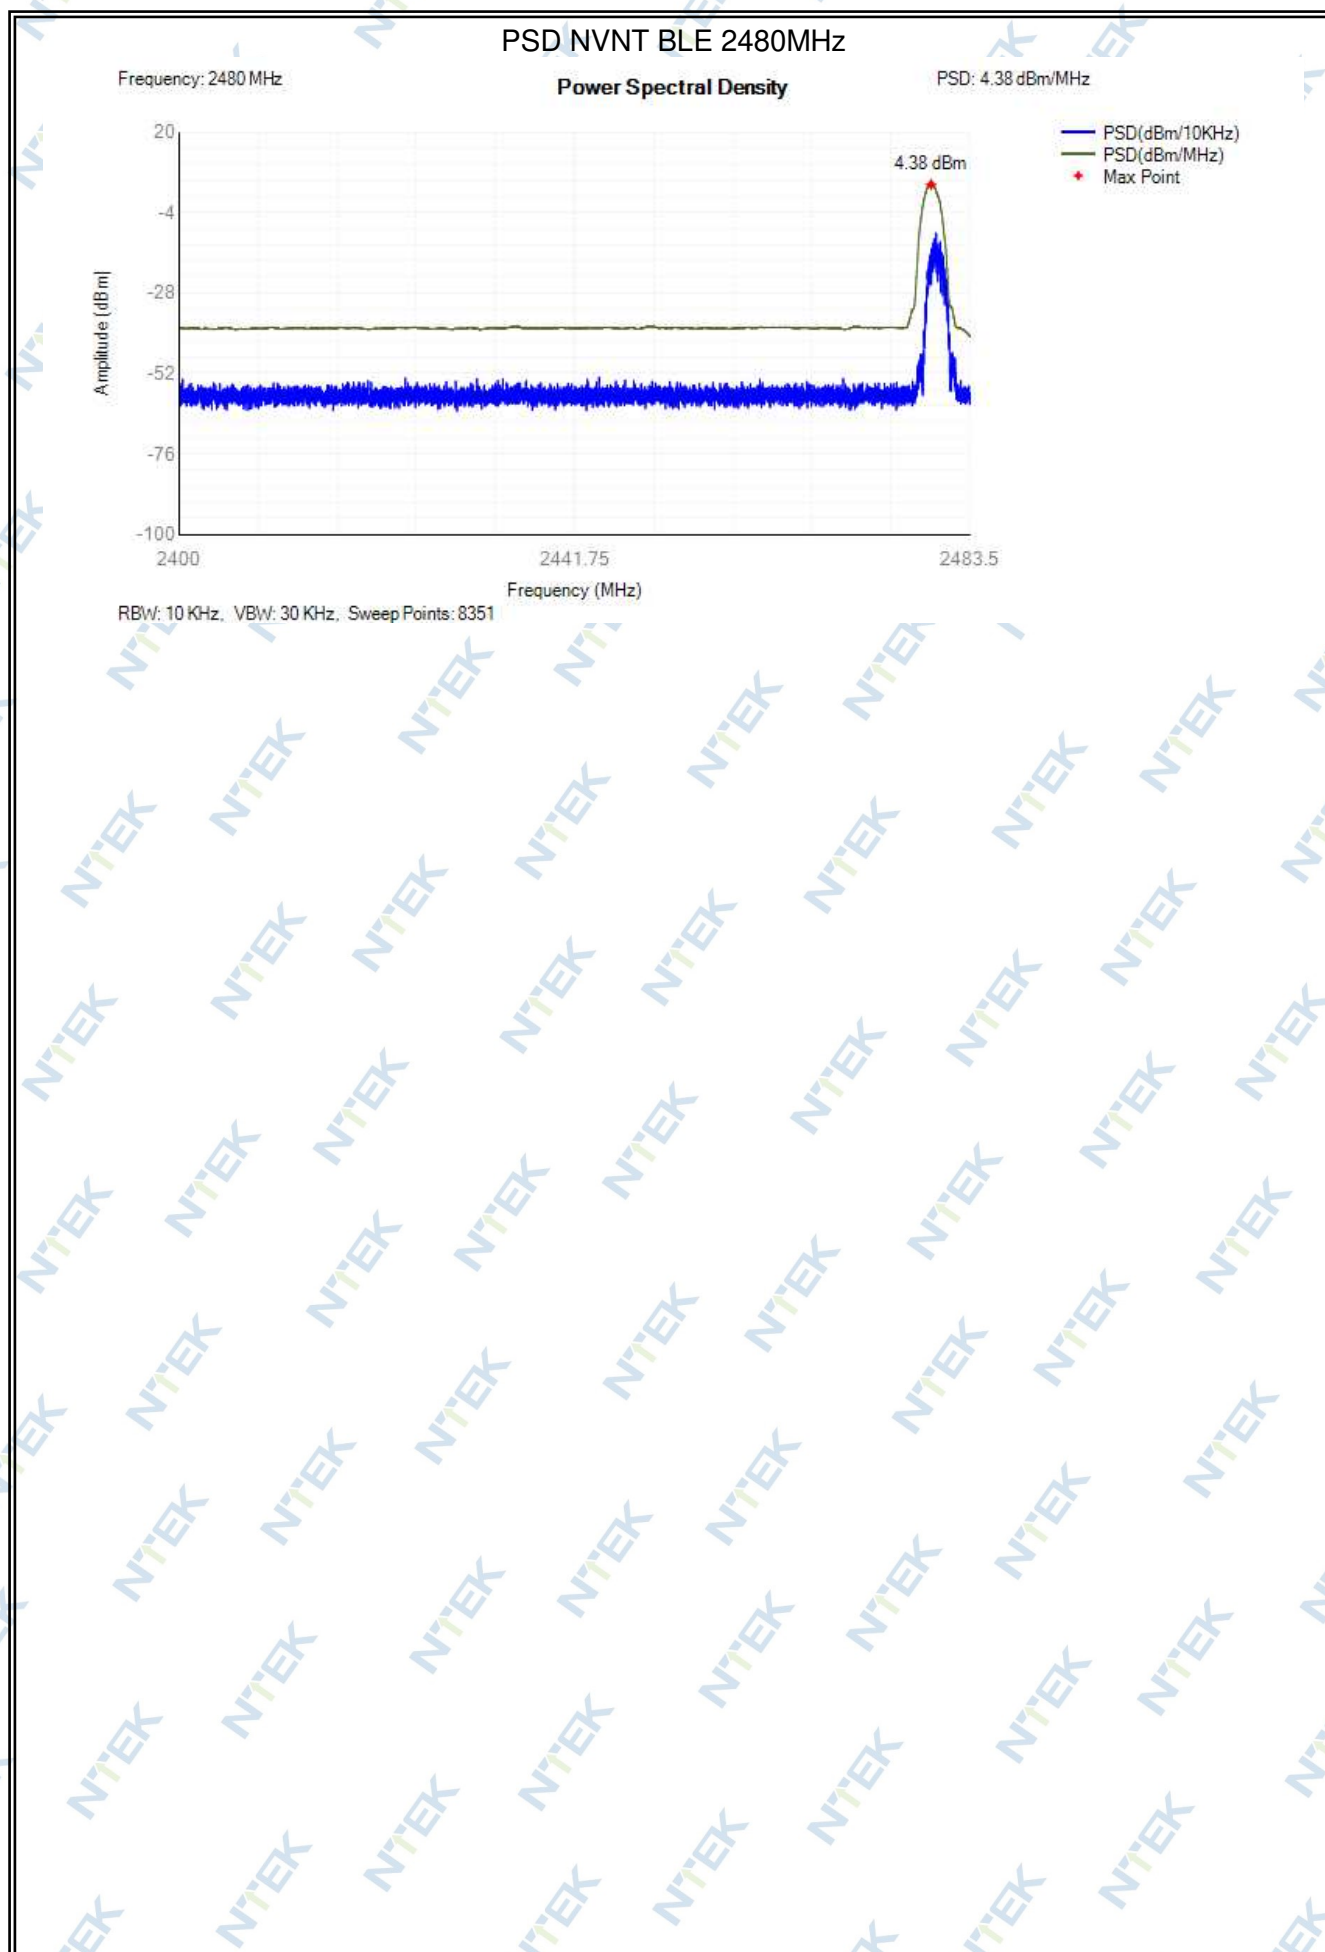


4.9 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	BLE	2402	2401.982	2.05	2400.957	2403.007	2400 - 2483.5MHz	Pass
NVNT	BLE	2440	2439.97	2.05	2438.945	2440.995	2400 - 2483.5MHz	Pass
NVNT	BLE	2480	2479.962	2.042	2478.941	2480.983	2400 - 2483.5MHz	Pass

OBW NVNT BLE 2402MHz

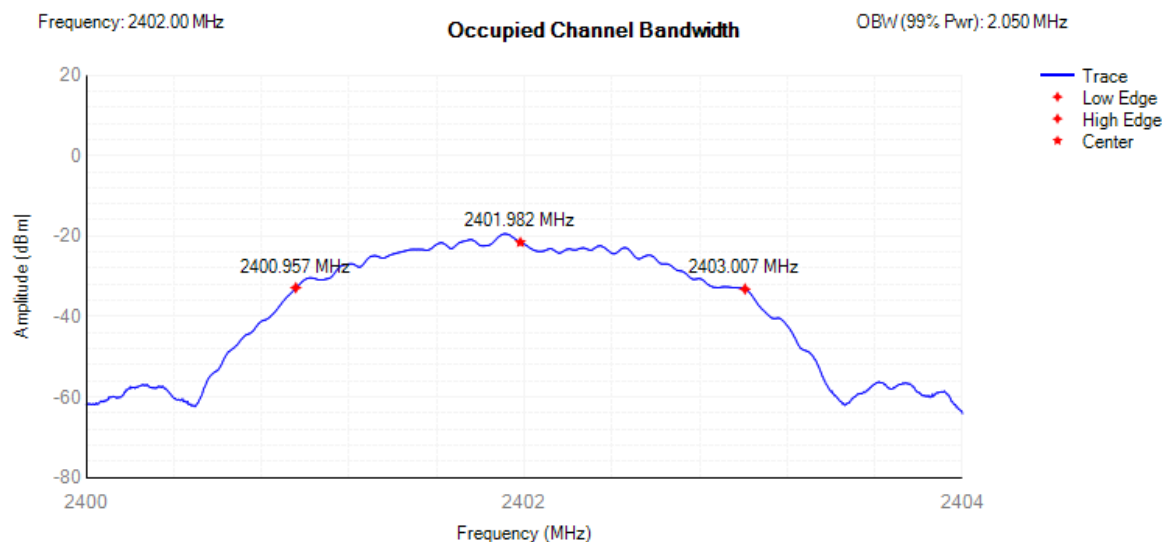

OBW NVNT BLE 2440MHz

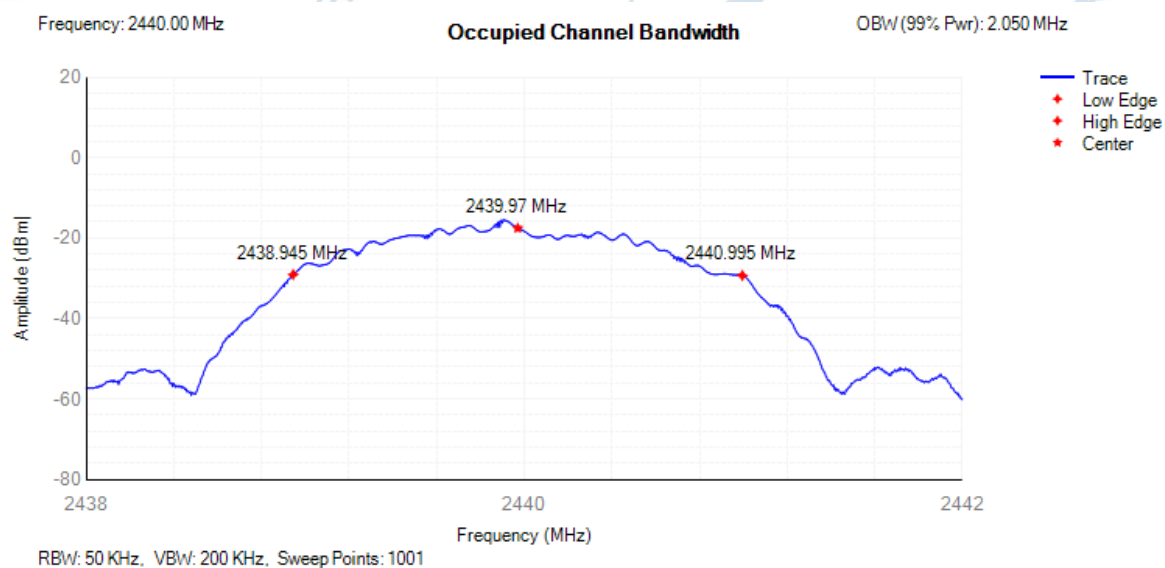


OBW NVNT BLE 2480MHz

Frequency: 2480.00 MHz

Occupied Channel Bandwidth

OBW (99% Pwr): 2.042 MHz

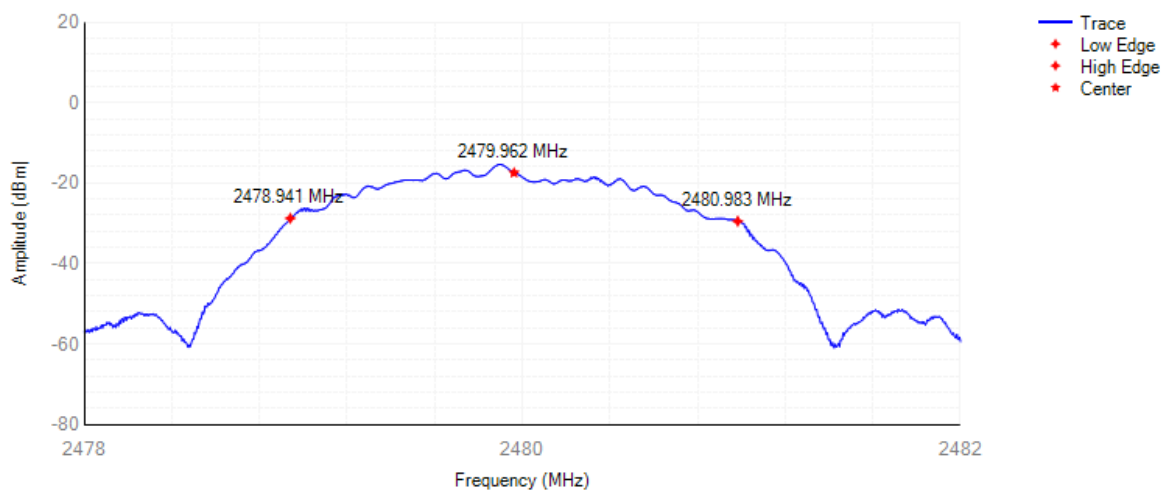


RBW: 50 KHz, VBW: 200 KHz, Sweep Points: 1001


4.10 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	2399.5	-37.12	-10	Pass
NVNT	BLE	2402	2398.5	-60.62	-10	Pass
NVNT	BLE	2402	2398.45	-61.66	-10	Pass
NVNT	BLE	2402	2397.45	-62.56	-20	Pass
NVNT	BLE	2402	2396.45	-63.25	-20	Pass
NVNT	BLE	2402	2396.4	-63.11	-20	Pass
NVNT	BLE	2480	2484	-62.96	-10	Pass
NVNT	BLE	2480	2485	-63.37	-10	Pass
NVNT	BLE	2480	2485.042	-63.05	-10	Pass
NVNT	BLE	2480	2486.042	-63.03	-20	Pass
NVNT	BLE	2480	2487.042	-62.4	-20	Pass
NVNT	BLE	2480	2487.084	-62.68	-20	Pass

Tx. Emissions OOB NVNT BLE 2402MHz

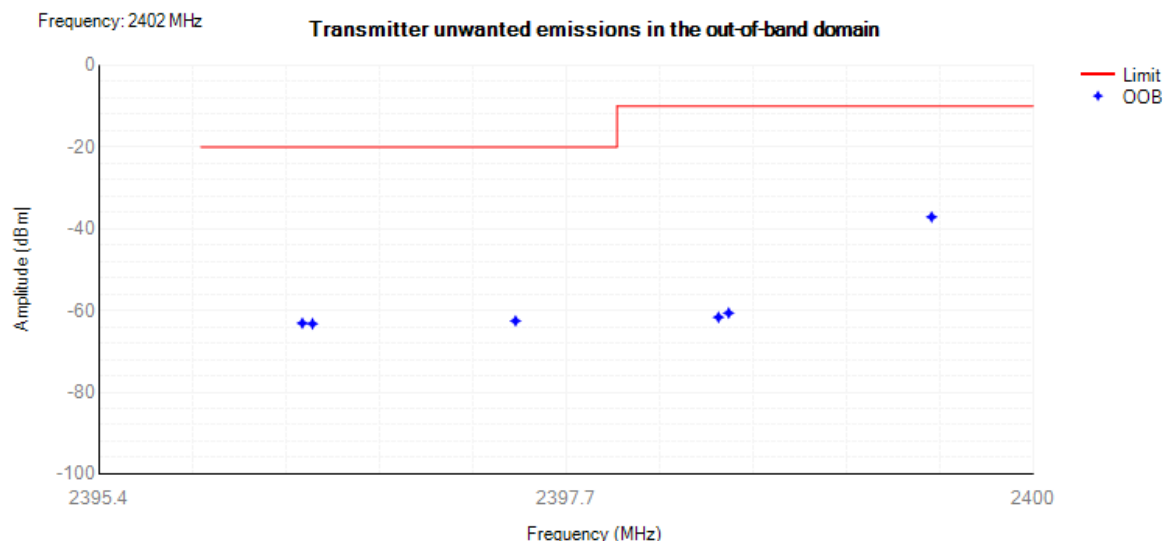


Tx. Emissions OOB NVNT BLE 2480MHz

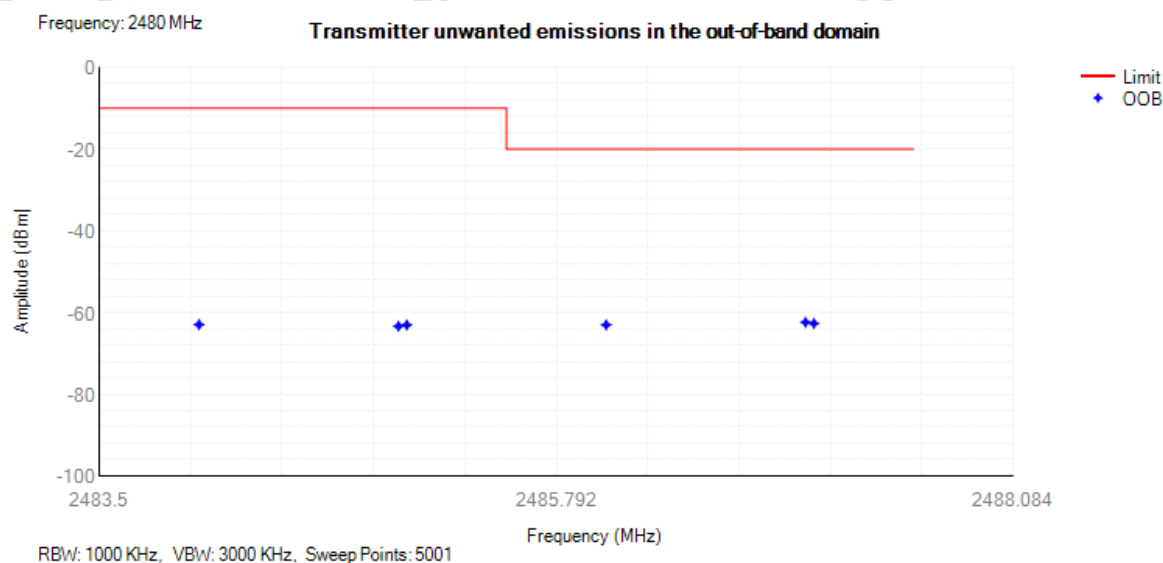

4.11 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -47 MHz	45.85	-66.16	NA	-36	Pass
NVNT	BLE	2402	47 MHz -74 MHz	62.75	-64.93	NA	-54	Pass
NVNT	BLE	2402	74 MHz -87.5 MHz	80.55	-66.45	NA	-36	Pass
NVNT	BLE	2402	87.5 MHz -118 MHz	91	-64.74	NA	-54	Pass
NVNT	BLE	2402	118 MHz -174 MHz	153.55	-64.8	NA	-36	Pass
NVNT	BLE	2402	174 MHz -230 MHz	183.85	-65.4	NA	-54	Pass
NVNT	BLE	2402	230 MHz -470 MHz	372.35	-64.69	NA	-36	Pass
NVNT	BLE	2402	470 MHz -694 MHz	504.45	-64.58	NA	-54	Pass
NVNT	BLE	2402	694 MHz -1000 MHz	988	-64.41	NA	-36	Pass
NVNT	BLE	2402	1000 MHz -2396 MHz	2394.5	-52.06	NA	-30	Pass
NVNT	BLE	2402	2487.5 MHz -12750 MHz	3202.5	-44.22	NA	-30	Pass
NVNT	BLE	2440	30 MHz -47 MHz	45.1	-66.86	NA	-36	Pass
NVNT	BLE	2440	47 MHz -74 MHz	71.55	-65.93	NA	-54	Pass
NVNT	BLE	2440	74 MHz -87.5 MHz	82.8	-66.3	NA	-36	Pass
NVNT	BLE	2440	87.5 MHz -118 MHz	90.2	-65.35	NA	-54	Pass
NVNT	BLE	2440	118 MHz -174 MHz	162.7	-65.54	NA	-36	Pass
NVNT	BLE	2440	174 MHz -230 MHz	229.45	-64.98	NA	-54	Pass
NVNT	BLE	2440	230 MHz -470 MHz	348.15	-64.01	NA	-36	Pass
NVNT	BLE	2440	470 MHz -694 MHz	658.1	-64.25	NA	-54	Pass
NVNT	BLE	2440	694 MHz -1000 MHz	940.75	-63.99	NA	-36	Pass
NVNT	BLE	2440	1000 MHz -2396 MHz	1961	-53.3	NA	-30	Pass
NVNT	BLE	2440	2487.5 MHz -12750 MHz	6794.5	-44.79	NA	-30	Pass
NVNT	BLE	2480	30 MHz -47 MHz	46.2	-66.55	NA	-36	Pass
NVNT	BLE	2480	47 MHz -74 MHz	57.7	-65.79	NA	-54	Pass
NVNT	BLE	2480	74 MHz -87.5 MHz	74.85	-65.25	NA	-36	Pass
NVNT	BLE	2480	87.5 MHz -118 MHz	107.75	-65.85	NA	-54	Pass
NVNT	BLE	2480	118 MHz -174 MHz	142.15	-65.88	NA	-36	Pass
NVNT	BLE	2480	174 MHz -230 MHz	228.05	-64.75	NA	-54	Pass
NVNT	BLE	2480	230 MHz -470 MHz	240.3	-64.73	NA	-36	Pass
NVNT	BLE	2480	470 MHz -694 MHz	589.75	-64.86	NA	-54	Pass
NVNT	BLE	2480	694 MHz -1000 MHz	959.75	-63.98	NA	-36	Pass
NVNT	BLE	2480	1000 MHz -2396 MHz	2329	-53.12	NA	-30	Pass
NVNT	BLE	2480	2487.5 MHz -12750 MHz	6965	-44.57	NA	-30	Pass


Tx. Spurious NVNT BLE 2402MHz

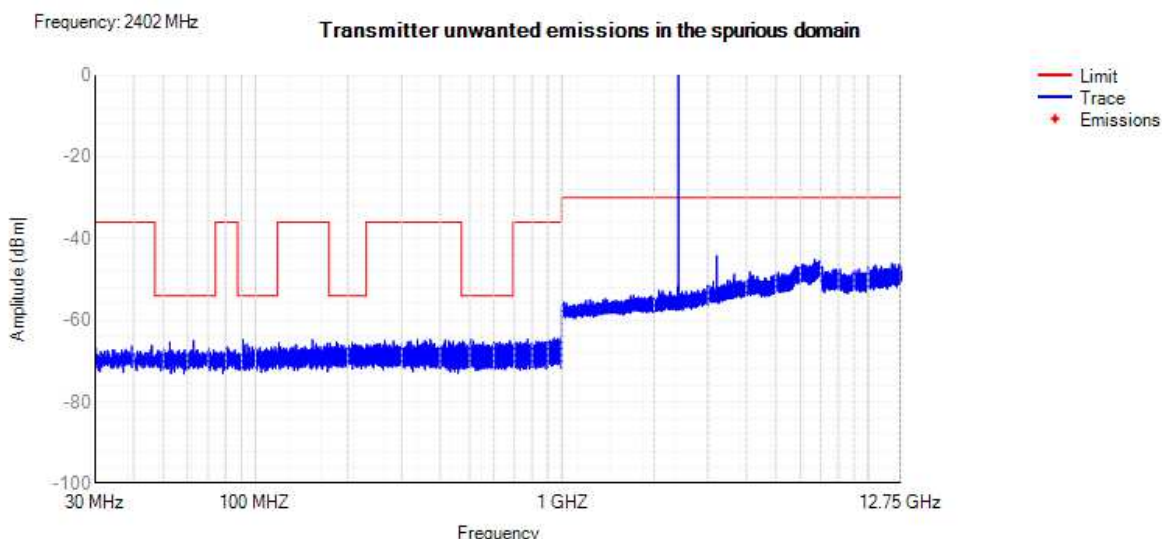

Tx. Spurious NVNT BLE 2440MHz

Frequency: 2440 MHz


Transmitter unwanted emissions in the spurious domain

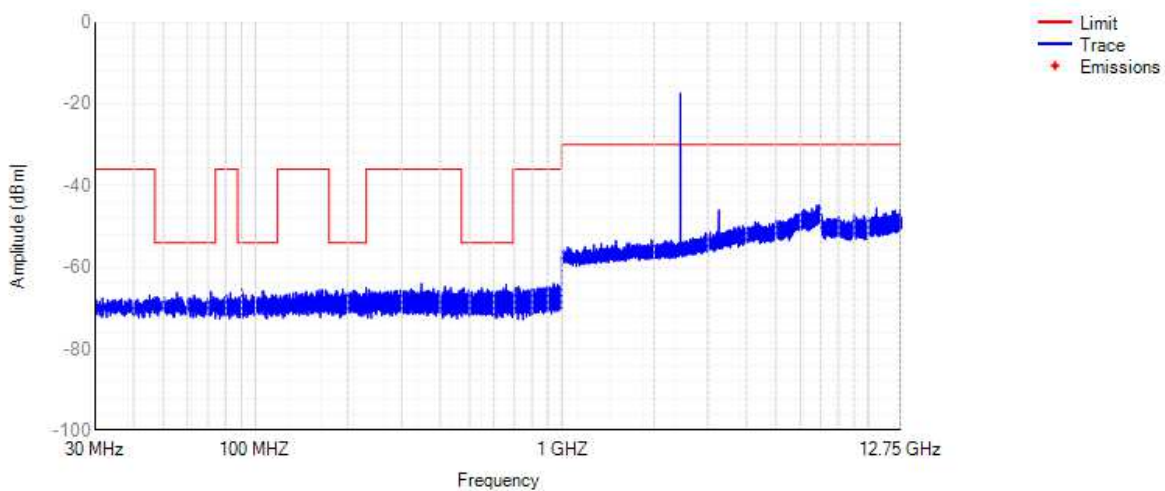

Tx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz


Transmitter unwanted emissions in the spurious domain

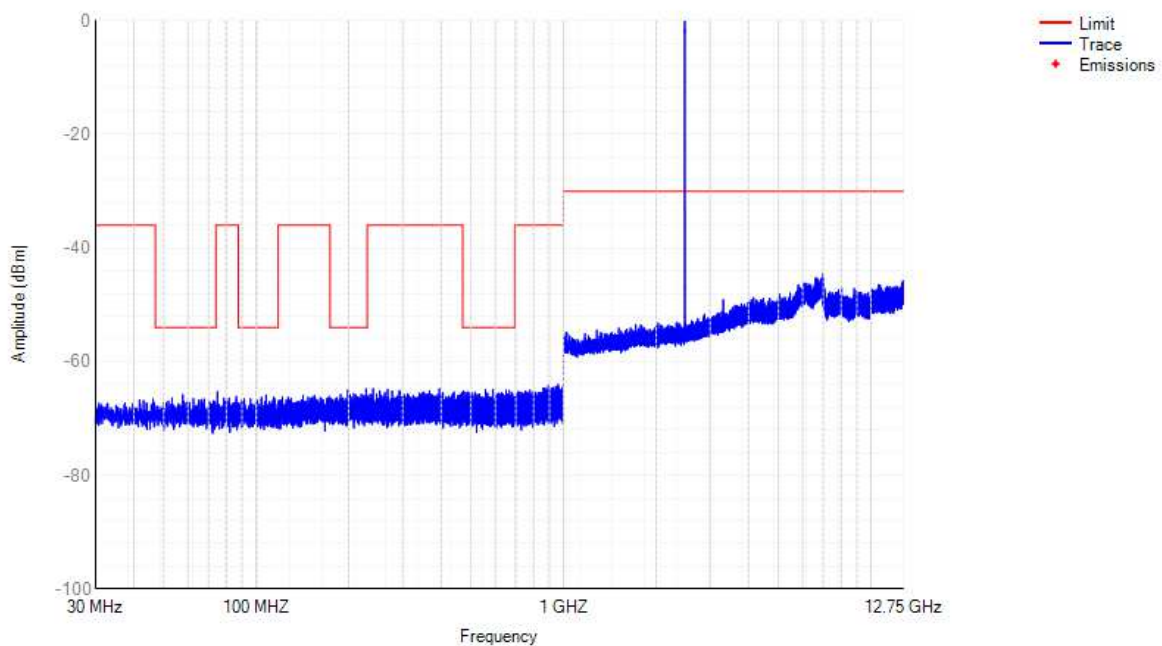


4.12 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -1000 MHz	861.85	-74.3	NA	-57	Pass
NVNT	BLE	2402	1000 MHz -12750 MHz	6882	-55.73	NA	-47	Pass
NVNT	BLE	2440	30 MHz -1000 MHz	960.75	-73.2	NA	-57	Pass
NVNT	BLE	2440	1000 MHz -12750 MHz	2473.5	-48.26	-59.3	-47	Pass
NVNT	BLE	2480	30 MHz -1000 MHz	960.1	-74.34	NA	-57	Pass
NVNT	BLE	2480	1000 MHz -12750 MHz	6910	-54.62	NA	-47	Pass


Rx. Spurious NVNT BLE 2402MHz

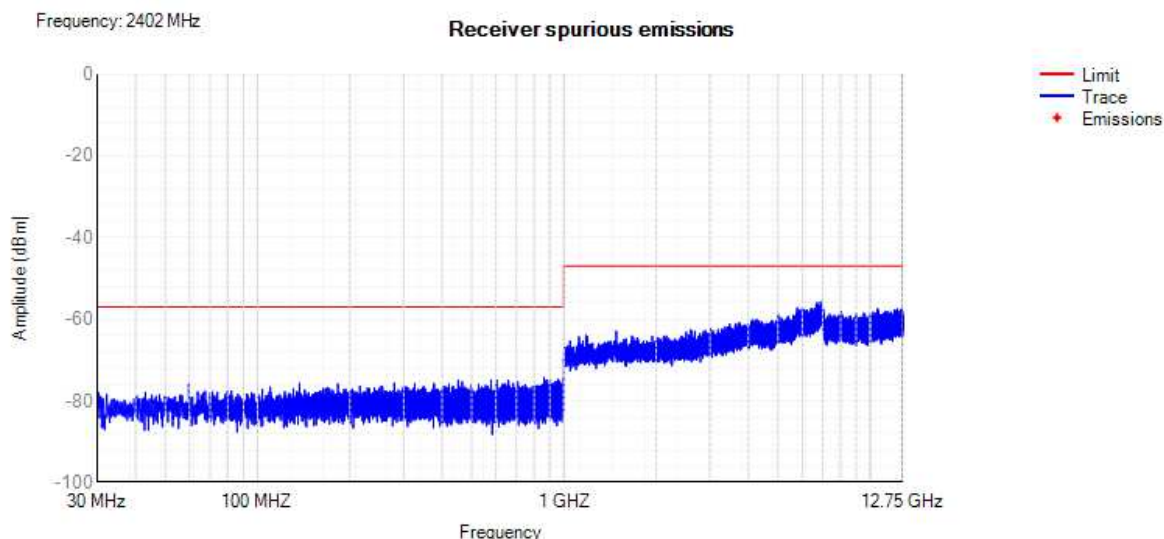

Rx. Spurious NVNT BLE 2440MHz

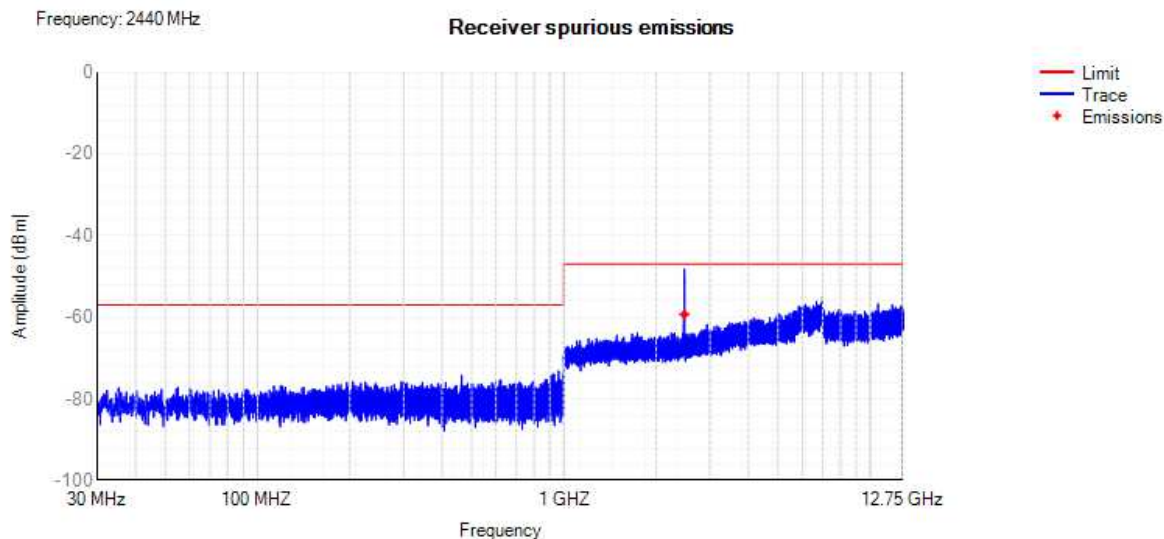

Rx. Spurious NVNT BLE 2480MHz

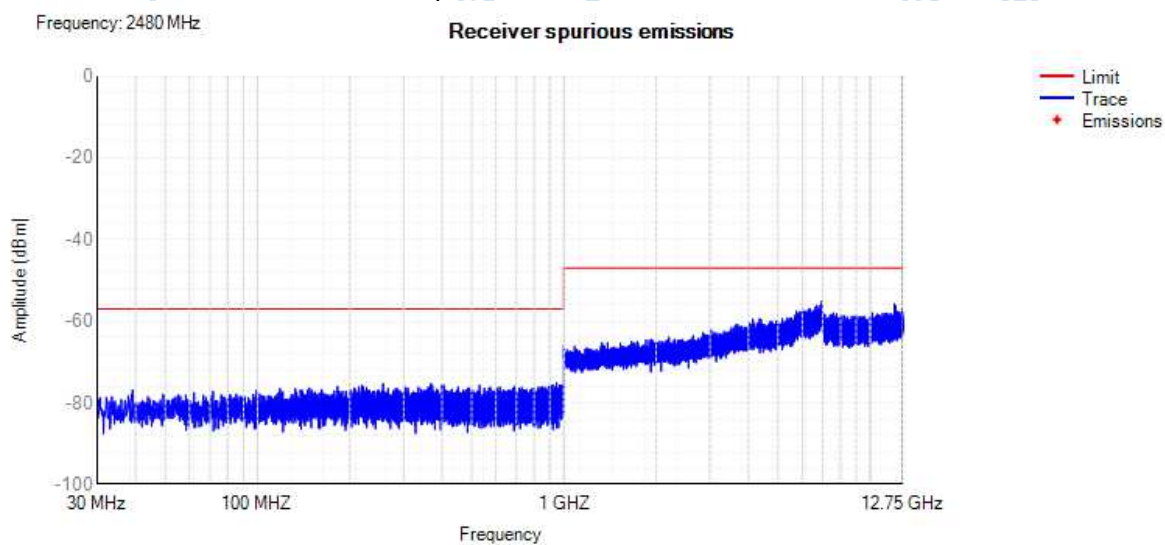


Module 5

1M


4.1 RF Output Power

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	0.3	240	5.3	20	Pass
NVNT	BLE	2440	0.13	240	5.13	20	Pass
NVNT	BLE	2480	1.74	240	6.74	20	Pass
NVLT	BLE	2402	-0.55	240	4.45	20	Pass
NVLT	BLE	2440	-0.65	240	4.35	20	Pass
NVLT	BLE	2480	1.2	240	6.2	20	Pass
NVHT	BLE	2402	-0.61	240	4.39	20	Pass
NVHT	BLE	2440	-0.55	240	4.45	20	Pass
NVHT	BLE	2480	1.4	240	6.4	20	Pass


Power NVNT BLE 2402MHz

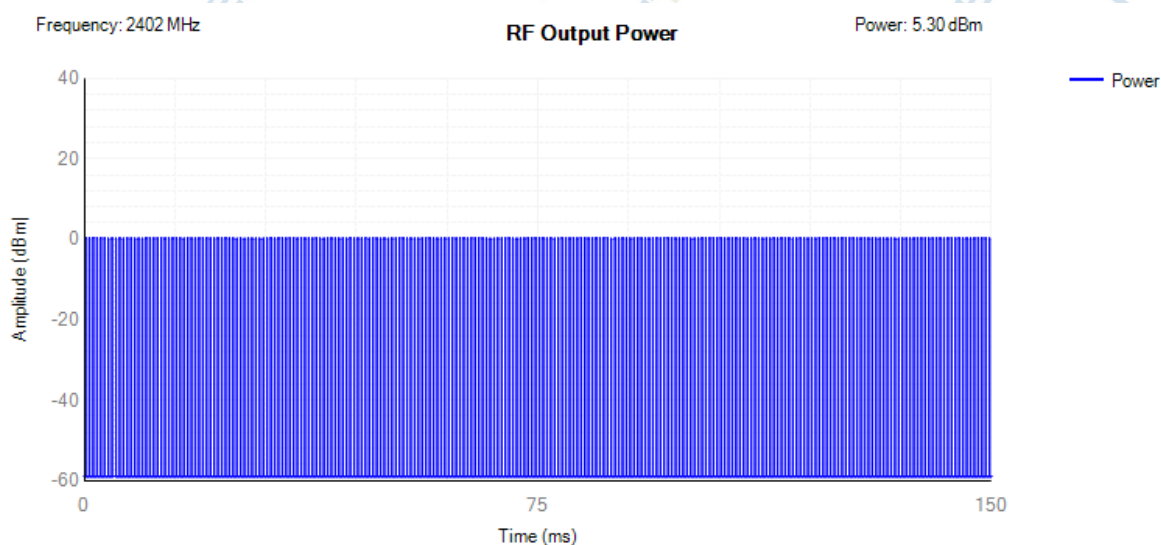

Power NVNT BLE 2440MHz

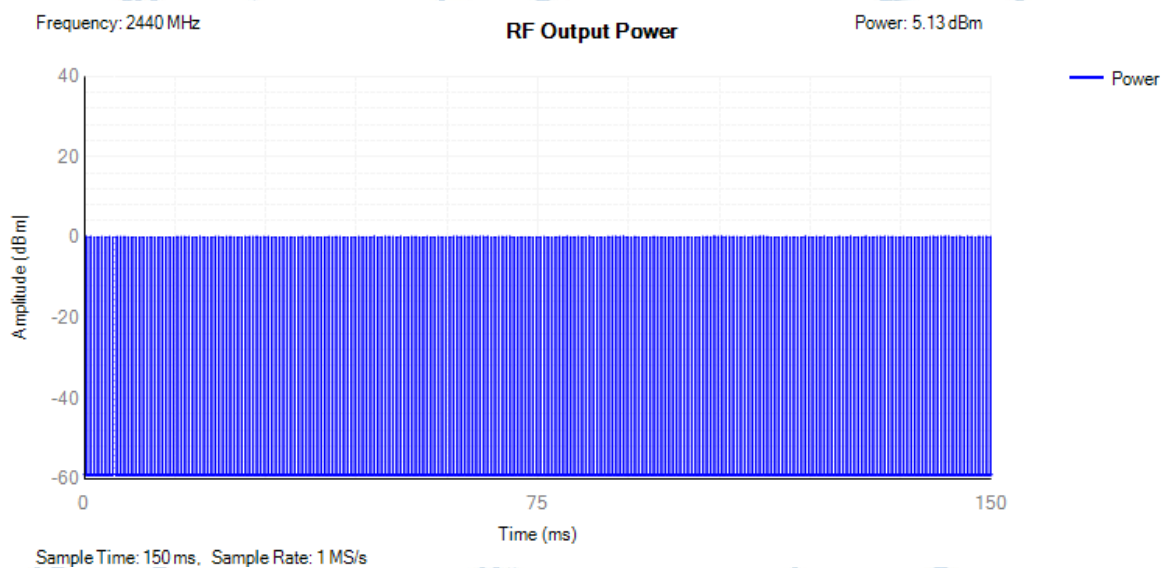


Power NVNT BLE 2480MHz

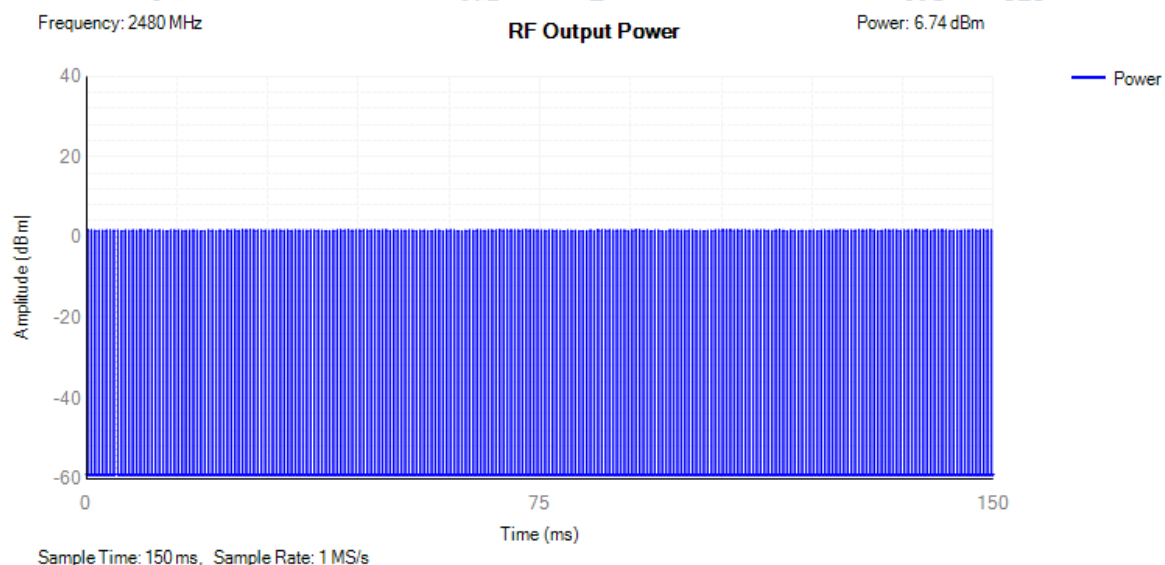


4.2 Power Spectral Density


Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	5.21	10	Pass
NVNT	BLE	2440	5.03	10	Pass
NVNT	BLE	2480	6.65	10	Pass

PSD NVNT BLE 2402MHz

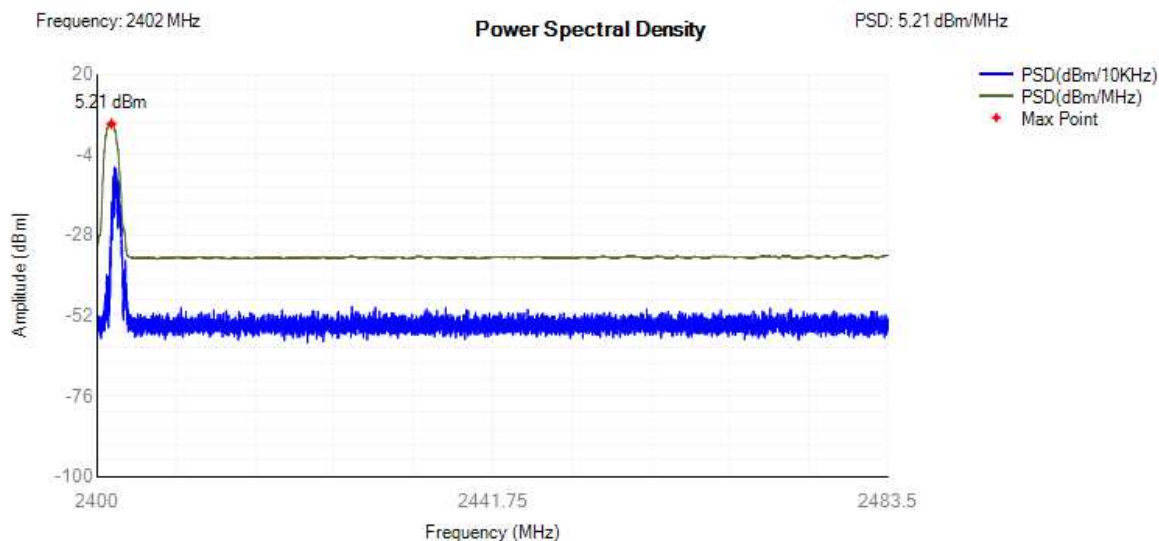

PSD NVNT BLE 2440MHz

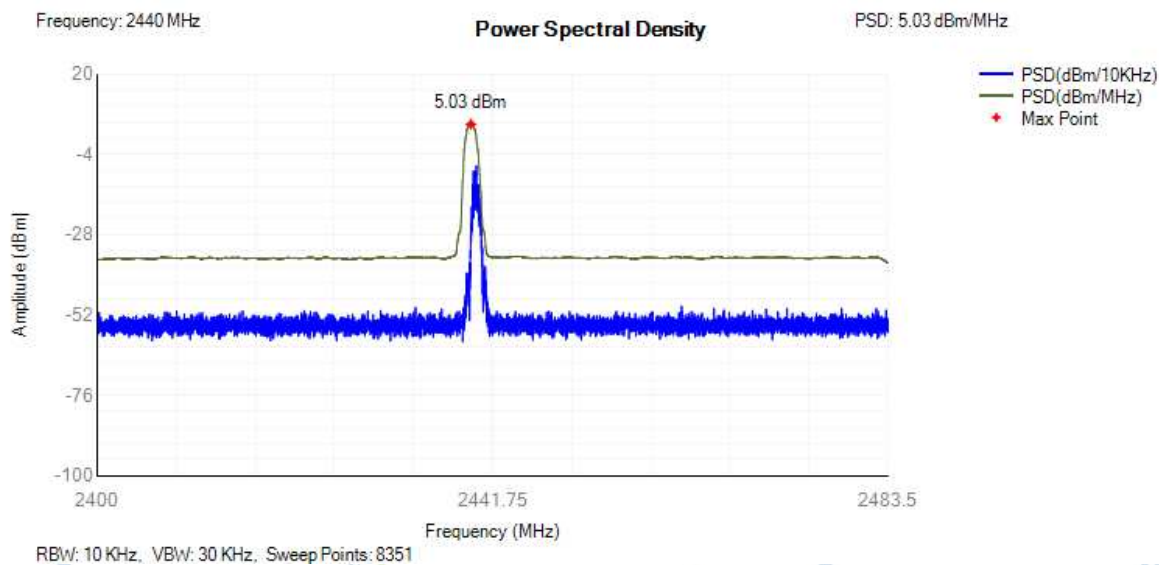


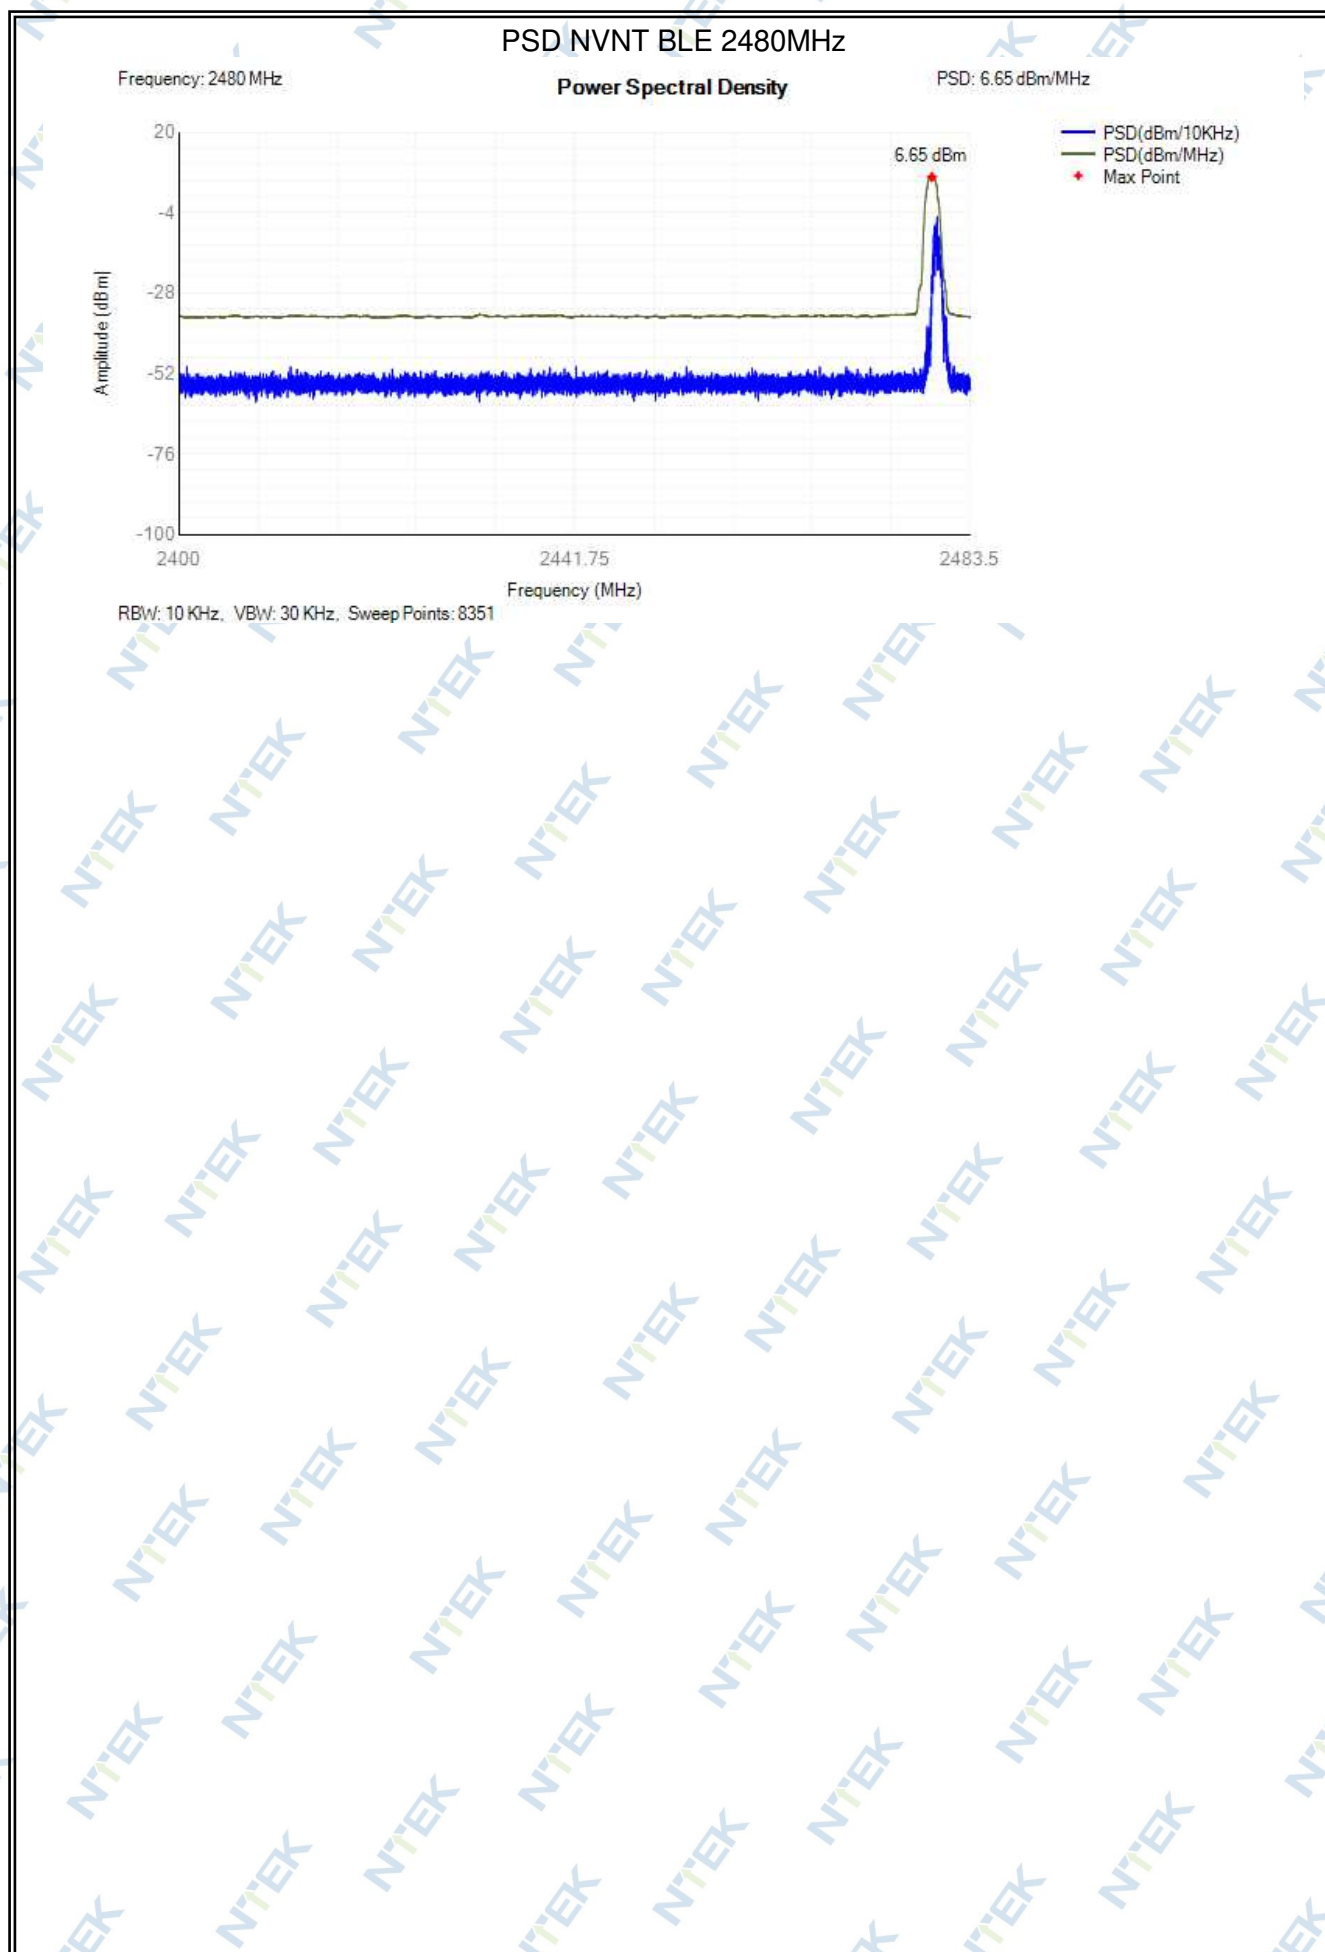

4.3 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	BLE	2402	2402.015	1.025	2401.503	2402.527	2400 - 2483.5MHz	Pass
NVNT	BLE	2440	2440.013	1.029	2439.499	2440.527	2400 - 2483.5MHz	Pass
NVNT	BLE	2480	2480.014	1.031	2479.499	2480.529	2400 - 2483.5MHz	Pass

OBW NVNT BLE 2402MHz

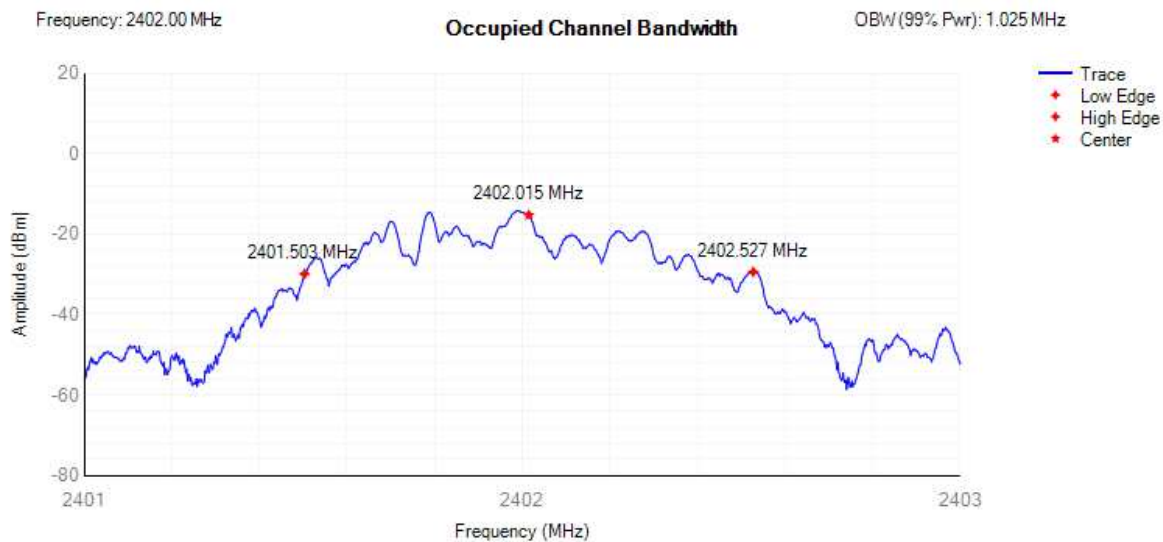

RBW: 20 KHz, VBW: 100 KHz, Sweep Points: 1001

OBW NVNT BLE 2440MHz

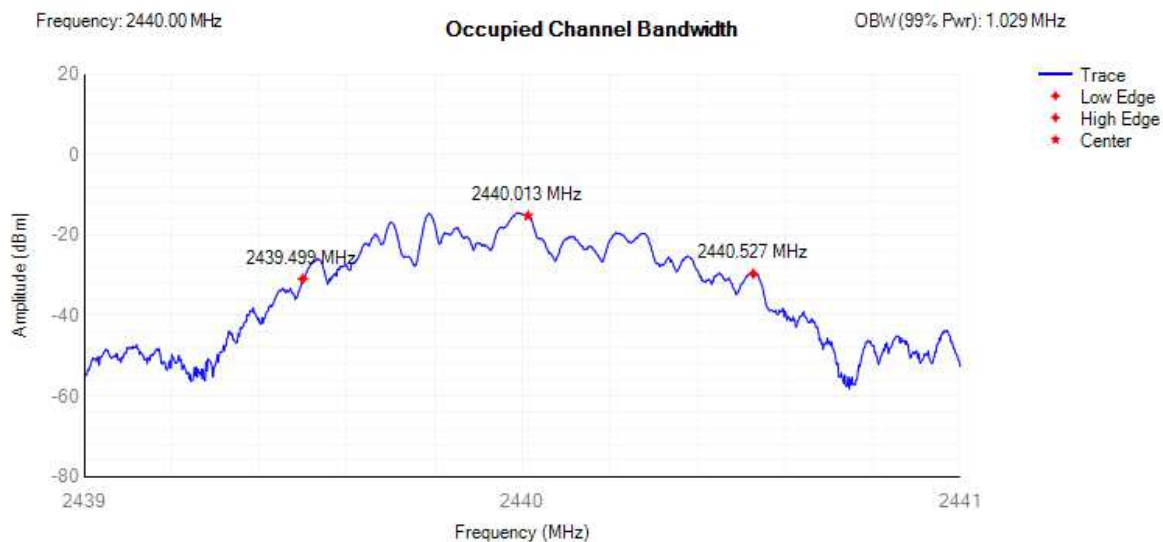


RBW: 20 KHz, VBW: 100 KHz, Sweep Points: 1001

OBW NVNT BLE 2480MHz

Frequency: 2480.00 MHz

Occupied Channel Bandwidth

OBW (99% Pwr): 1.031 MHz

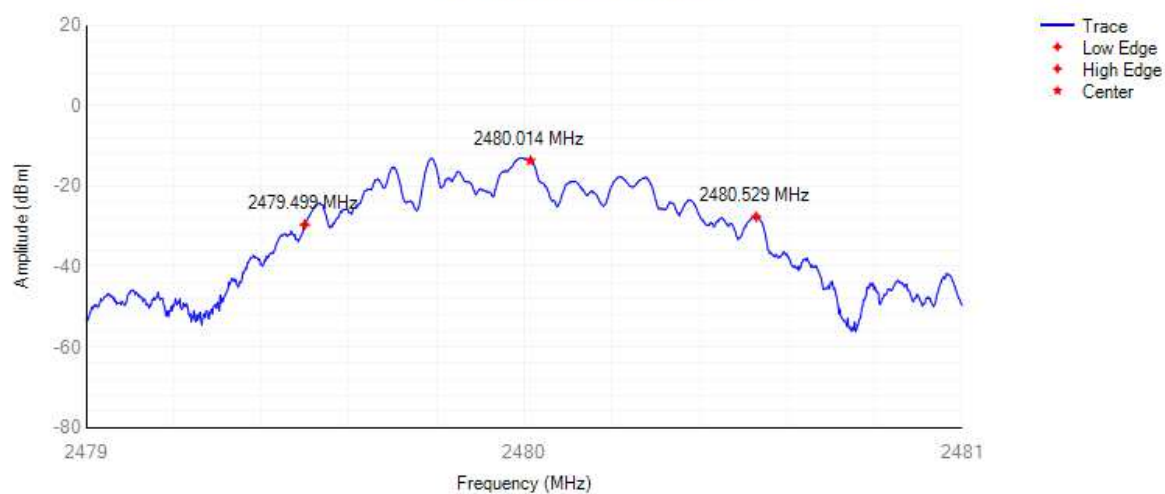


RBW: 20 KHz, VBW: 100 KHz, Sweep Points: 1001


4.4 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	2399.5	-62.69	-10	Pass
NVNT	BLE	2402	2399.475	-63.39	-10	Pass
NVNT	BLE	2402	2398.475	-55.59	-20	Pass
NVNT	BLE	2402	2398.45	-63.45	-20	Pass
NVNT	BLE	2480	2484	-55.19	-10	Pass
NVNT	BLE	2480	2484.031	-53.69	-10	Pass
NVNT	BLE	2480	2485.031	-60.04	-20	Pass
NVNT	BLE	2480	2485.062	-63.05	-20	Pass

Tx. Emissions OOB NVNT BLE 2402MHz

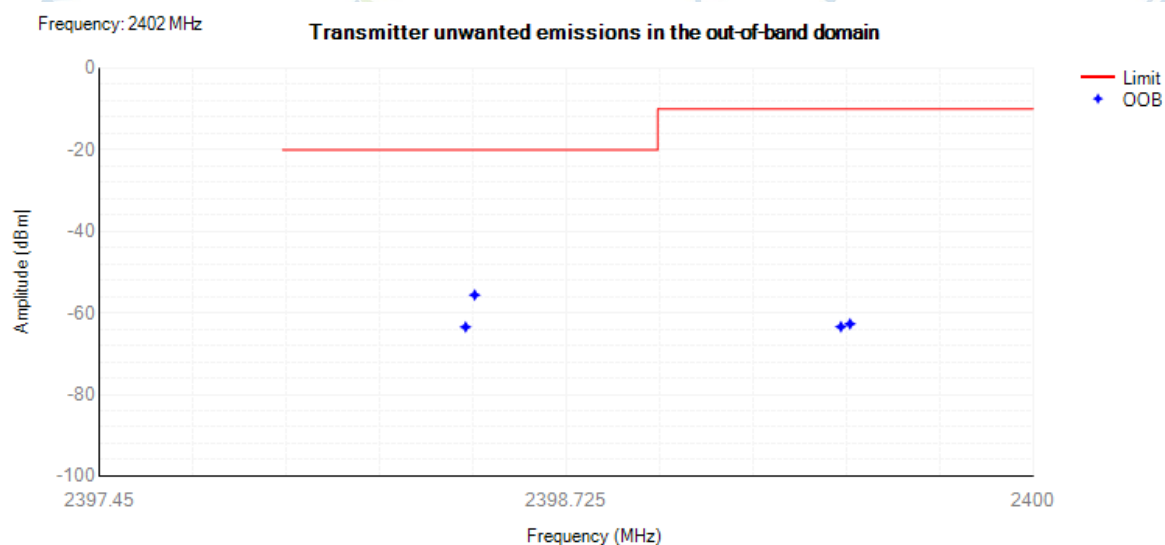

Tx. Emissions OOB NVNT BLE 2480MHz

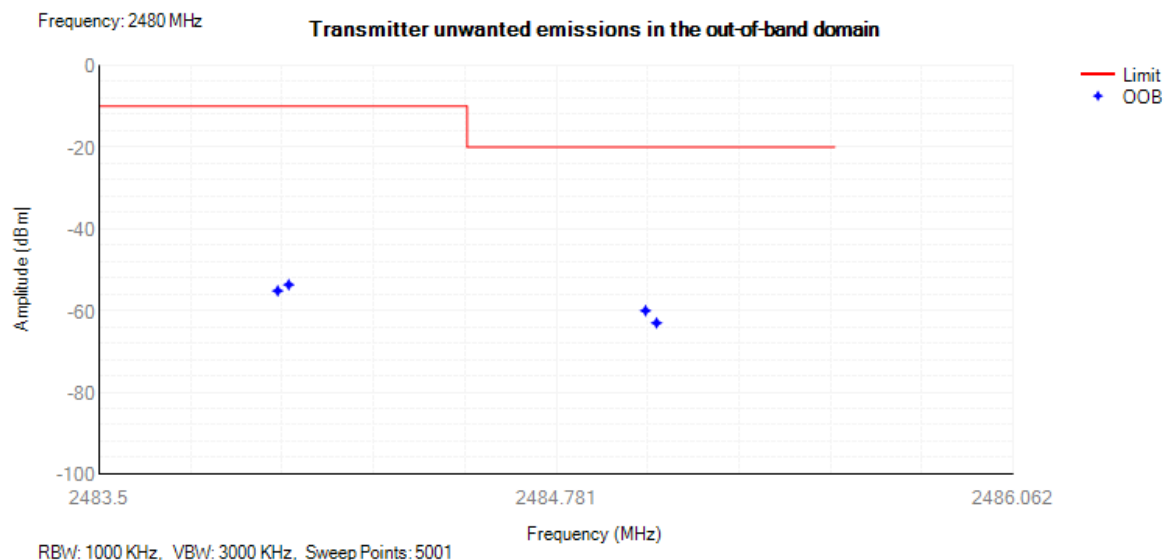


4.5 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -47 MHz	32.55	-67.08	NA	-36	Pass
NVNT	BLE	2402	47 MHz -74 MHz	56.95	-65.55	NA	-54	Pass
NVNT	BLE	2402	74 MHz -87.5 MHz	81.2	-66.79	NA	-36	Pass
NVNT	BLE	2402	87.5 MHz -118 MHz	94.65	-66.06	NA	-54	Pass
NVNT	BLE	2402	118 MHz -174 MHz	164.65	-65.46	NA	-36	Pass
NVNT	BLE	2402	174 MHz -230 MHz	180.7	-65.33	NA	-54	Pass
NVNT	BLE	2402	230 MHz -470 MHz	345.9	-65.02	NA	-36	Pass
NVNT	BLE	2402	470 MHz -694 MHz	622.95	-65.14	NA	-54	Pass
NVNT	BLE	2402	694 MHz -1000 MHz	957.1	-64.15	NA	-36	Pass
NVNT	BLE	2402	1000 MHz -2398 MHz	2397	-39.67	NA	-30	Pass
NVNT	BLE	2402	2485.5 MHz -12750 MHz	6857.5	-45.62	NA	-30	Pass
NVNT	BLE	2440	30 MHz -47 MHz	39.4	-65.74	NA	-36	Pass
NVNT	BLE	2440	47 MHz -74 MHz	71.1	-65.78	NA	-54	Pass
NVNT	BLE	2440	74 MHz -87.5 MHz	77.3	-66.65	NA	-36	Pass
NVNT	BLE	2440	87.5 MHz -118 MHz	104.4	-64.93	NA	-54	Pass
NVNT	BLE	2440	118 MHz -174 MHz	135.25	-65.34	NA	-36	Pass
NVNT	BLE	2440	174 MHz -230 MHz	202	-65.01	NA	-54	Pass
NVNT	BLE	2440	230 MHz -470 MHz	281.45	-64.67	NA	-36	Pass
NVNT	BLE	2440	470 MHz -694 MHz	668.8	-65.2	NA	-54	Pass
NVNT	BLE	2440	694 MHz -1000 MHz	894.9	-64.13	NA	-36	Pass
NVNT	BLE	2440	1000 MHz -2398 MHz	2330.5	-51.62	NA	-30	Pass
NVNT	BLE	2440	2485.5 MHz -12750 MHz	6865	-45.19	NA	-30	Pass
NVNT	BLE	2480	30 MHz -47 MHz	34.95	-67.37	NA	-36	Pass
NVNT	BLE	2480	47 MHz -74 MHz	68.15	-66.02	NA	-54	Pass
NVNT	BLE	2480	74 MHz -87.5 MHz	78.4	-66.45	NA	-36	Pass
NVNT	BLE	2480	87.5 MHz -118 MHz	95.5	-66.44	NA	-54	Pass
NVNT	BLE	2480	118 MHz -174 MHz	131.05	-64.92	NA	-36	Pass
NVNT	BLE	2480	174 MHz -230 MHz	201.05	-65.1	NA	-54	Pass
NVNT	BLE	2480	230 MHz -470 MHz	278.15	-65	NA	-36	Pass
NVNT	BLE	2480	470 MHz -694 MHz	663.3	-64.52	NA	-54	Pass
NVNT	BLE	2480	694 MHz -1000 MHz	976.85	-64.09	NA	-36	Pass
NVNT	BLE	2480	1000 MHz -2398 MHz	2352	-47.82	NA	-30	Pass
NVNT	BLE	2480	2485.5 MHz -12750 MHz	6799.5	-44.88	NA	-30	Pass

Tx. Spurious NVNT BLE 2402MHz

Frequency: 2402 MHz


Transmitter unwanted emissions in the spurious domain

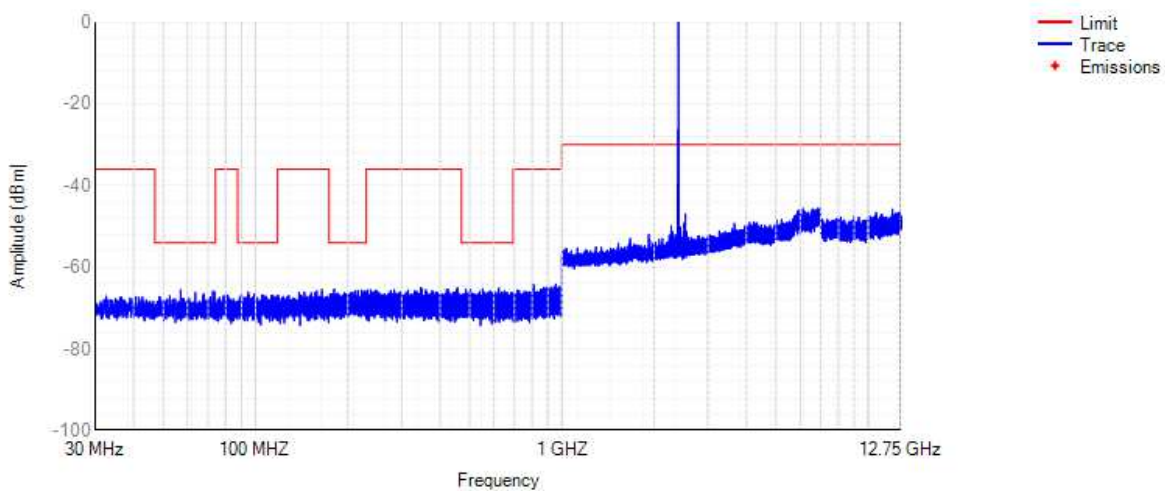

Tx. Spurious NVNT BLE 2440MHz

Frequency: 2440 MHz


Transmitter unwanted emissions in the spurious domain

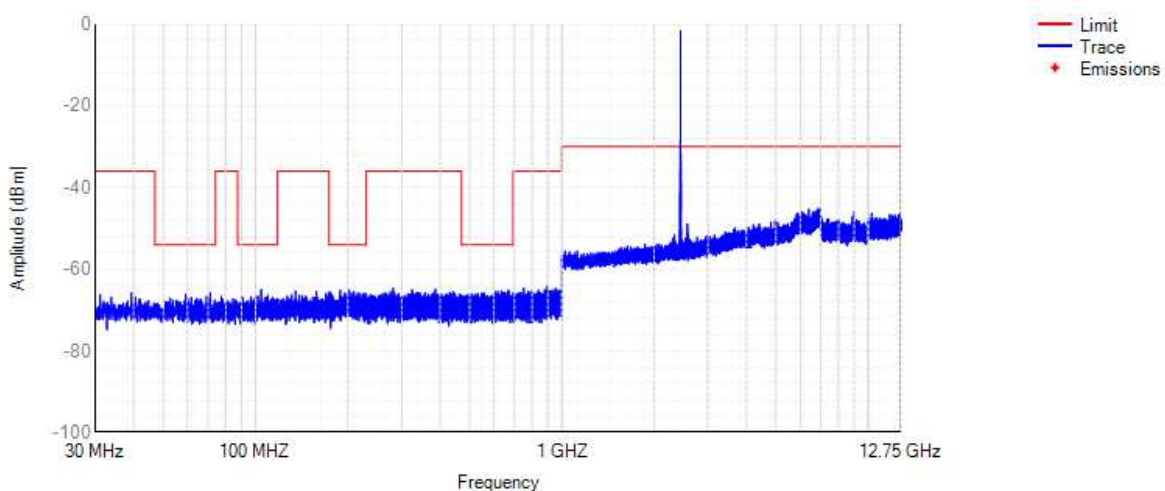

Tx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz


Transmitter unwanted emissions in the spurious domain

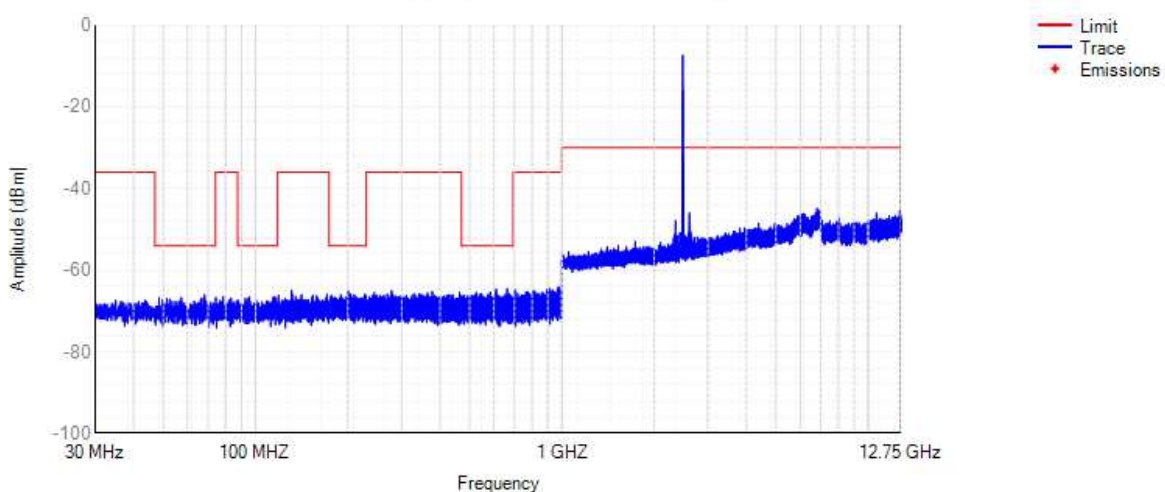


4.6 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -1000 MHz	905.619	-69.5	NA	-57	Pass
NVNT	BLE	2402	1000 MHz -12750 MHz	6999	-55.02	NA	-47	Pass
NVNT	BLE	2440	30 MHz -1000 MHz	893.15	-67.84	NA	-57	Pass
NVNT	BLE	2440	1000 MHz -12750 MHz	2604	-45.2	-69.72	-47	Pass
NVNT	BLE	2480	30 MHz -1000 MHz	997.9	-73.05	NA	-57	Pass
NVNT	BLE	2480	1000 MHz -12750 MHz	6976	-54.88	NA	-47	Pass

Rx. Spurious NVNT BLE 2402MHz

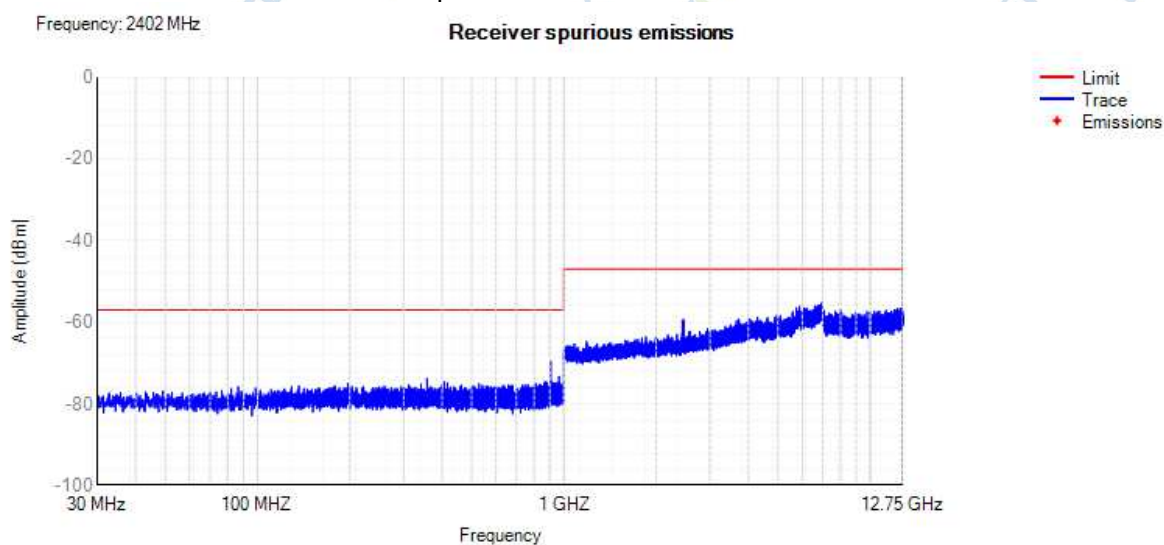


Rx. Spurious NVNT BLE 2440MHz

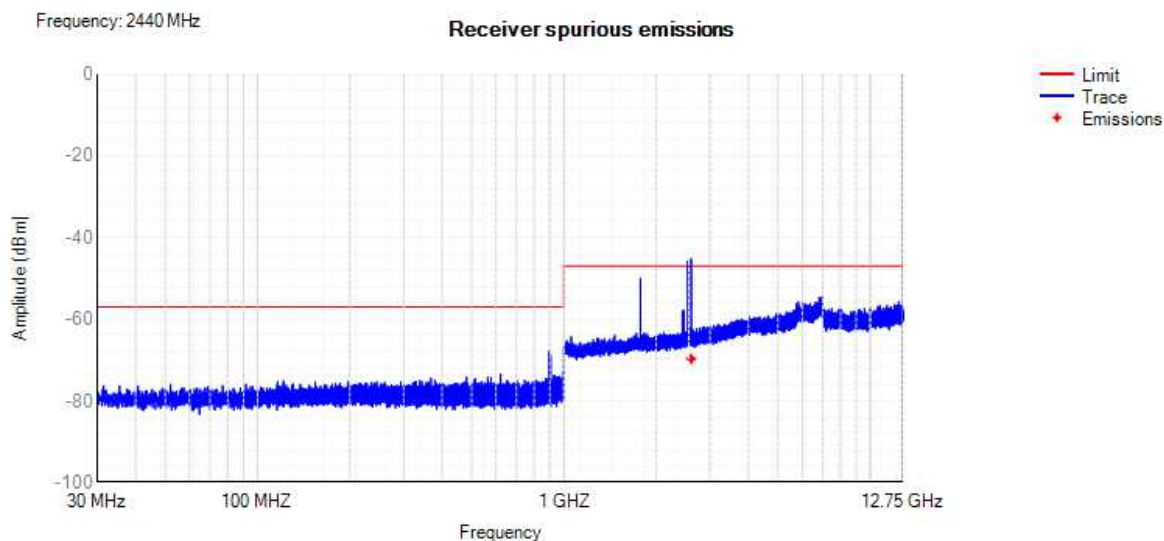

Rx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz

Receiver spurious emissions

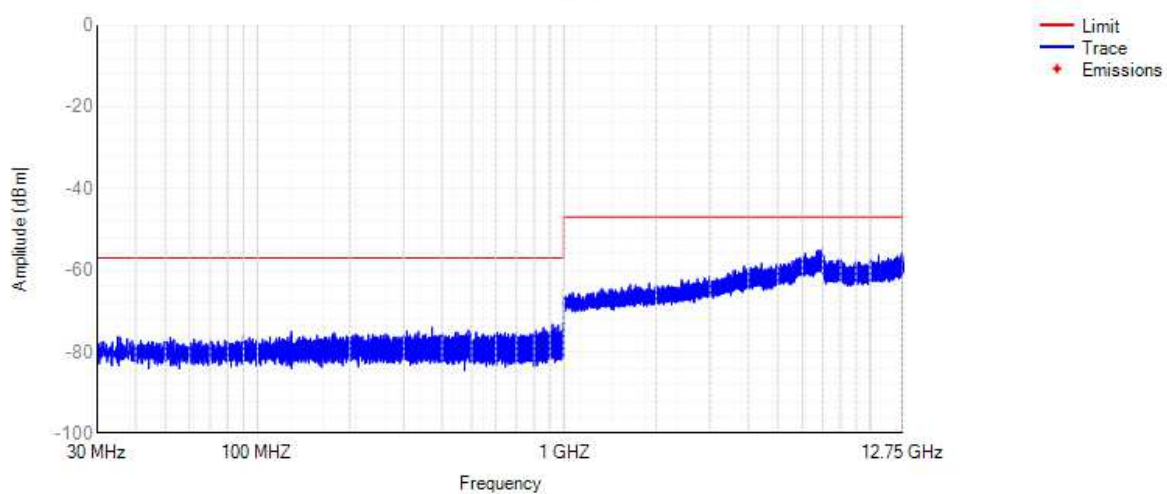


Module 5

2M


4.7 RF Output Power

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	1.06	160	6.06	20	Pass
NVNT	BLE	2440	0.53	160	5.53	20	Pass
NVNT	BLE	2480	1.81	160	6.81	20	Pass
NVLT	BLE	2402	0.21	160	5.21	20	Pass
NVLT	BLE	2440	-0.25	160	4.75	20	Pass
NVLT	BLE	2480	1.27	160	6.27	20	Pass
NVHT	BLE	2402	0.15	160	5.15	20	Pass
NVHT	BLE	2440	-0.15	160	4.85	20	Pass
NVHT	BLE	2480	1.47	160	6.47	20	Pass


Power NVNT BLE 2402MHz

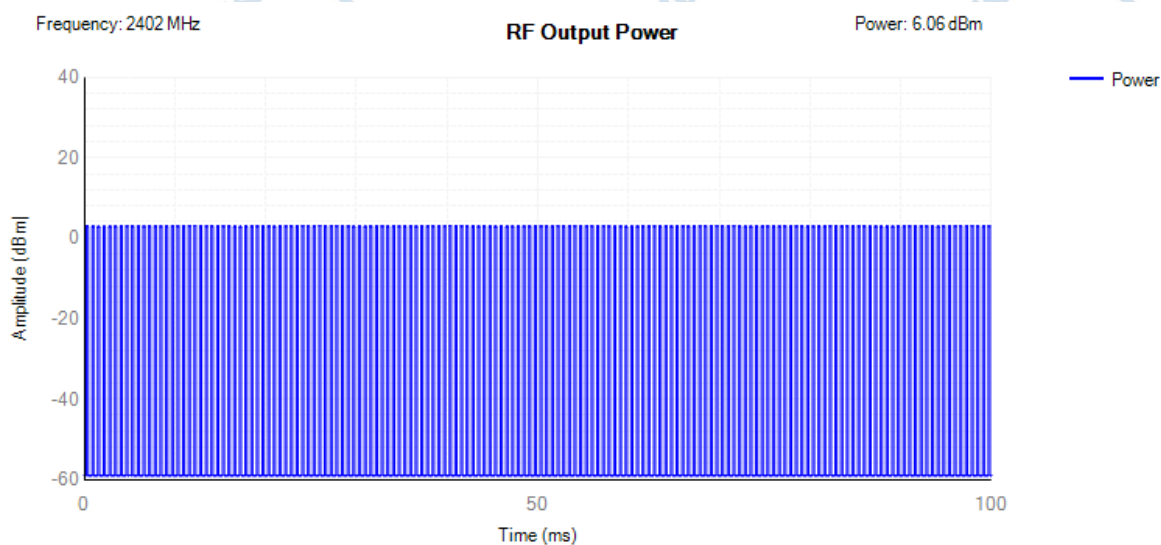

Power NVNT BLE 2440MHz

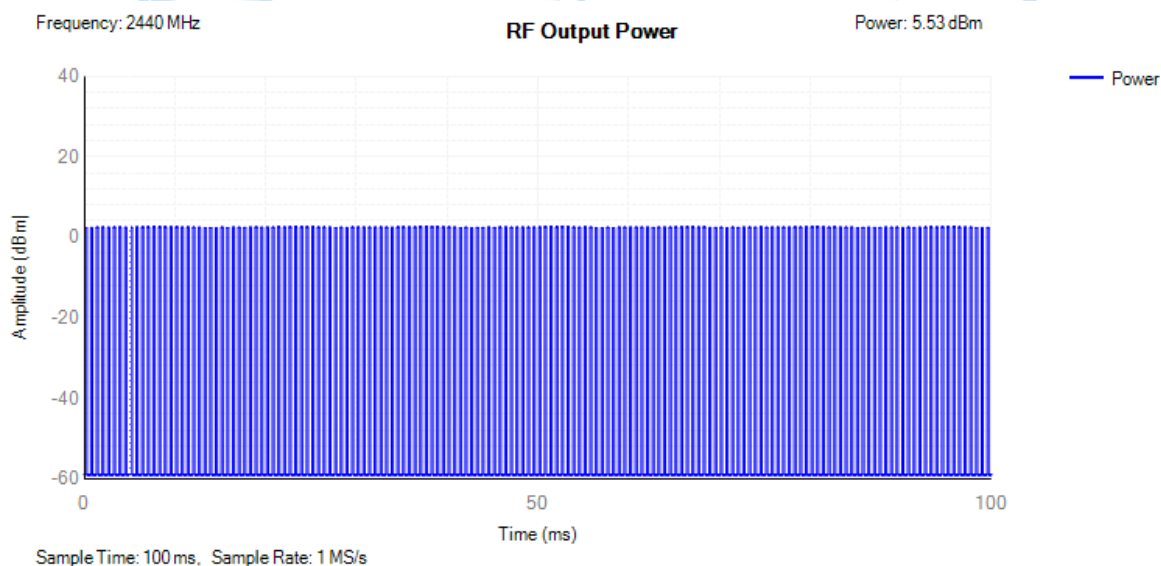


Power NVNT BLE 2480MHz

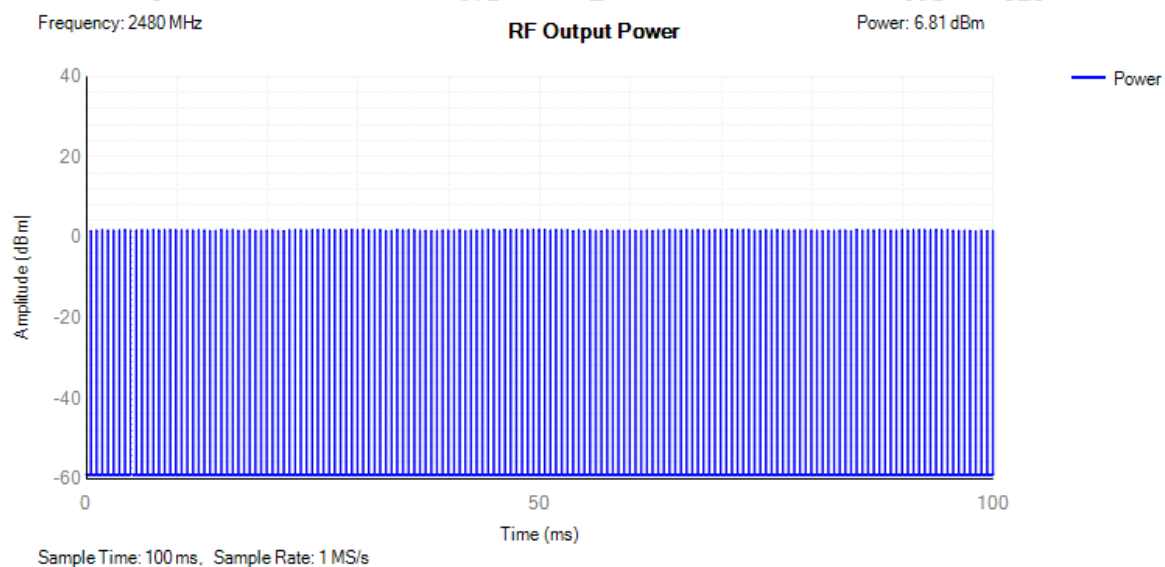


4.8 Power Spectral Density


Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	4.76	10	Pass
NVNT	BLE	2440	4.24	10	Pass
NVNT	BLE	2480	5.87	10	Pass

PSD NVNT BLE 2402MHz

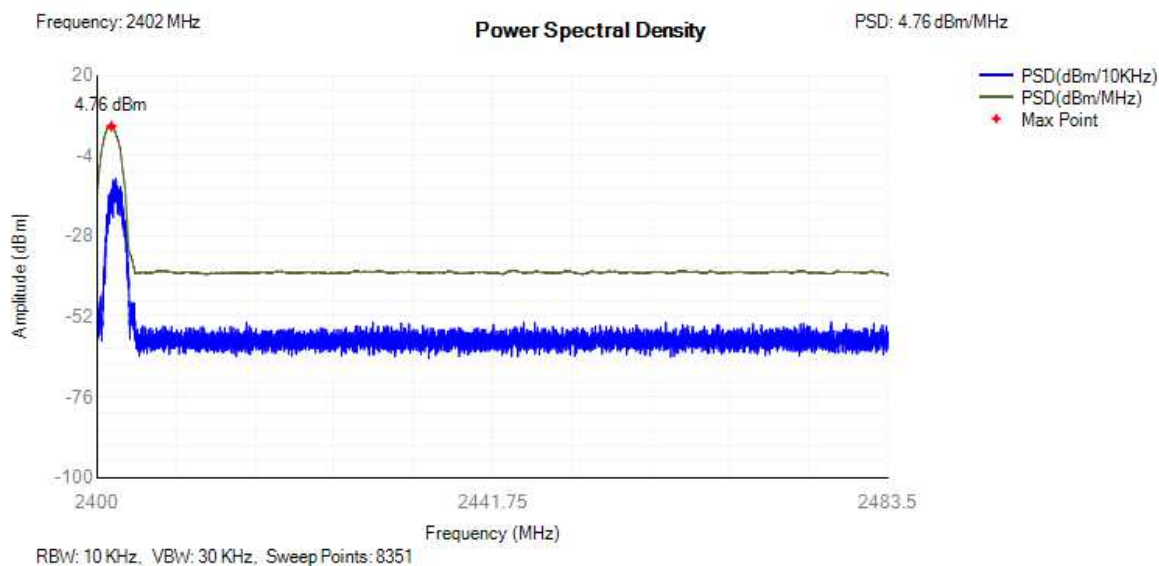

PSD NVNT BLE 2440MHz

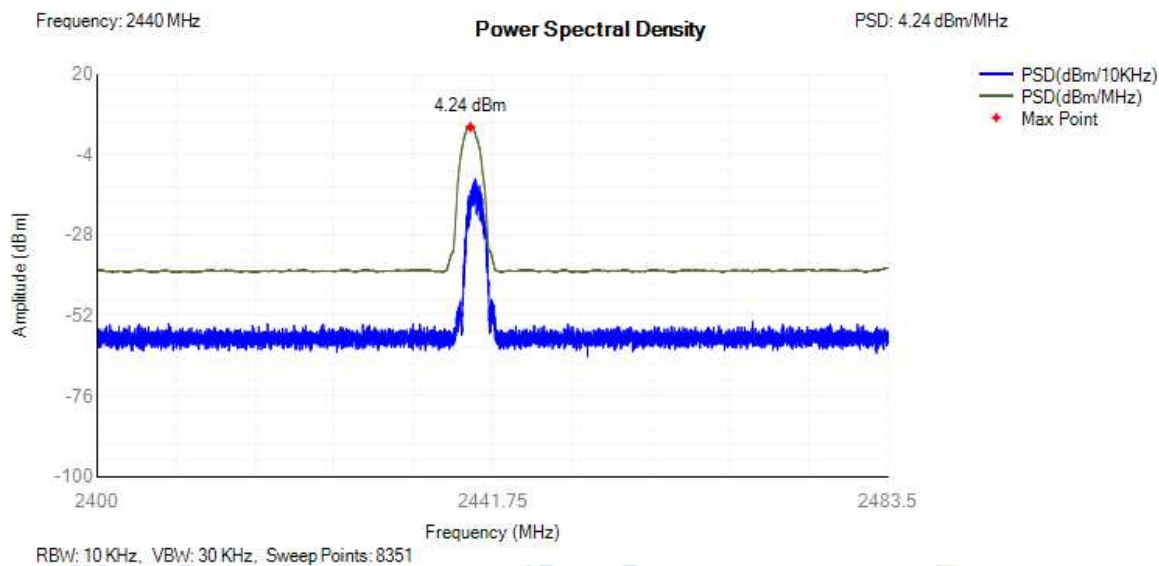


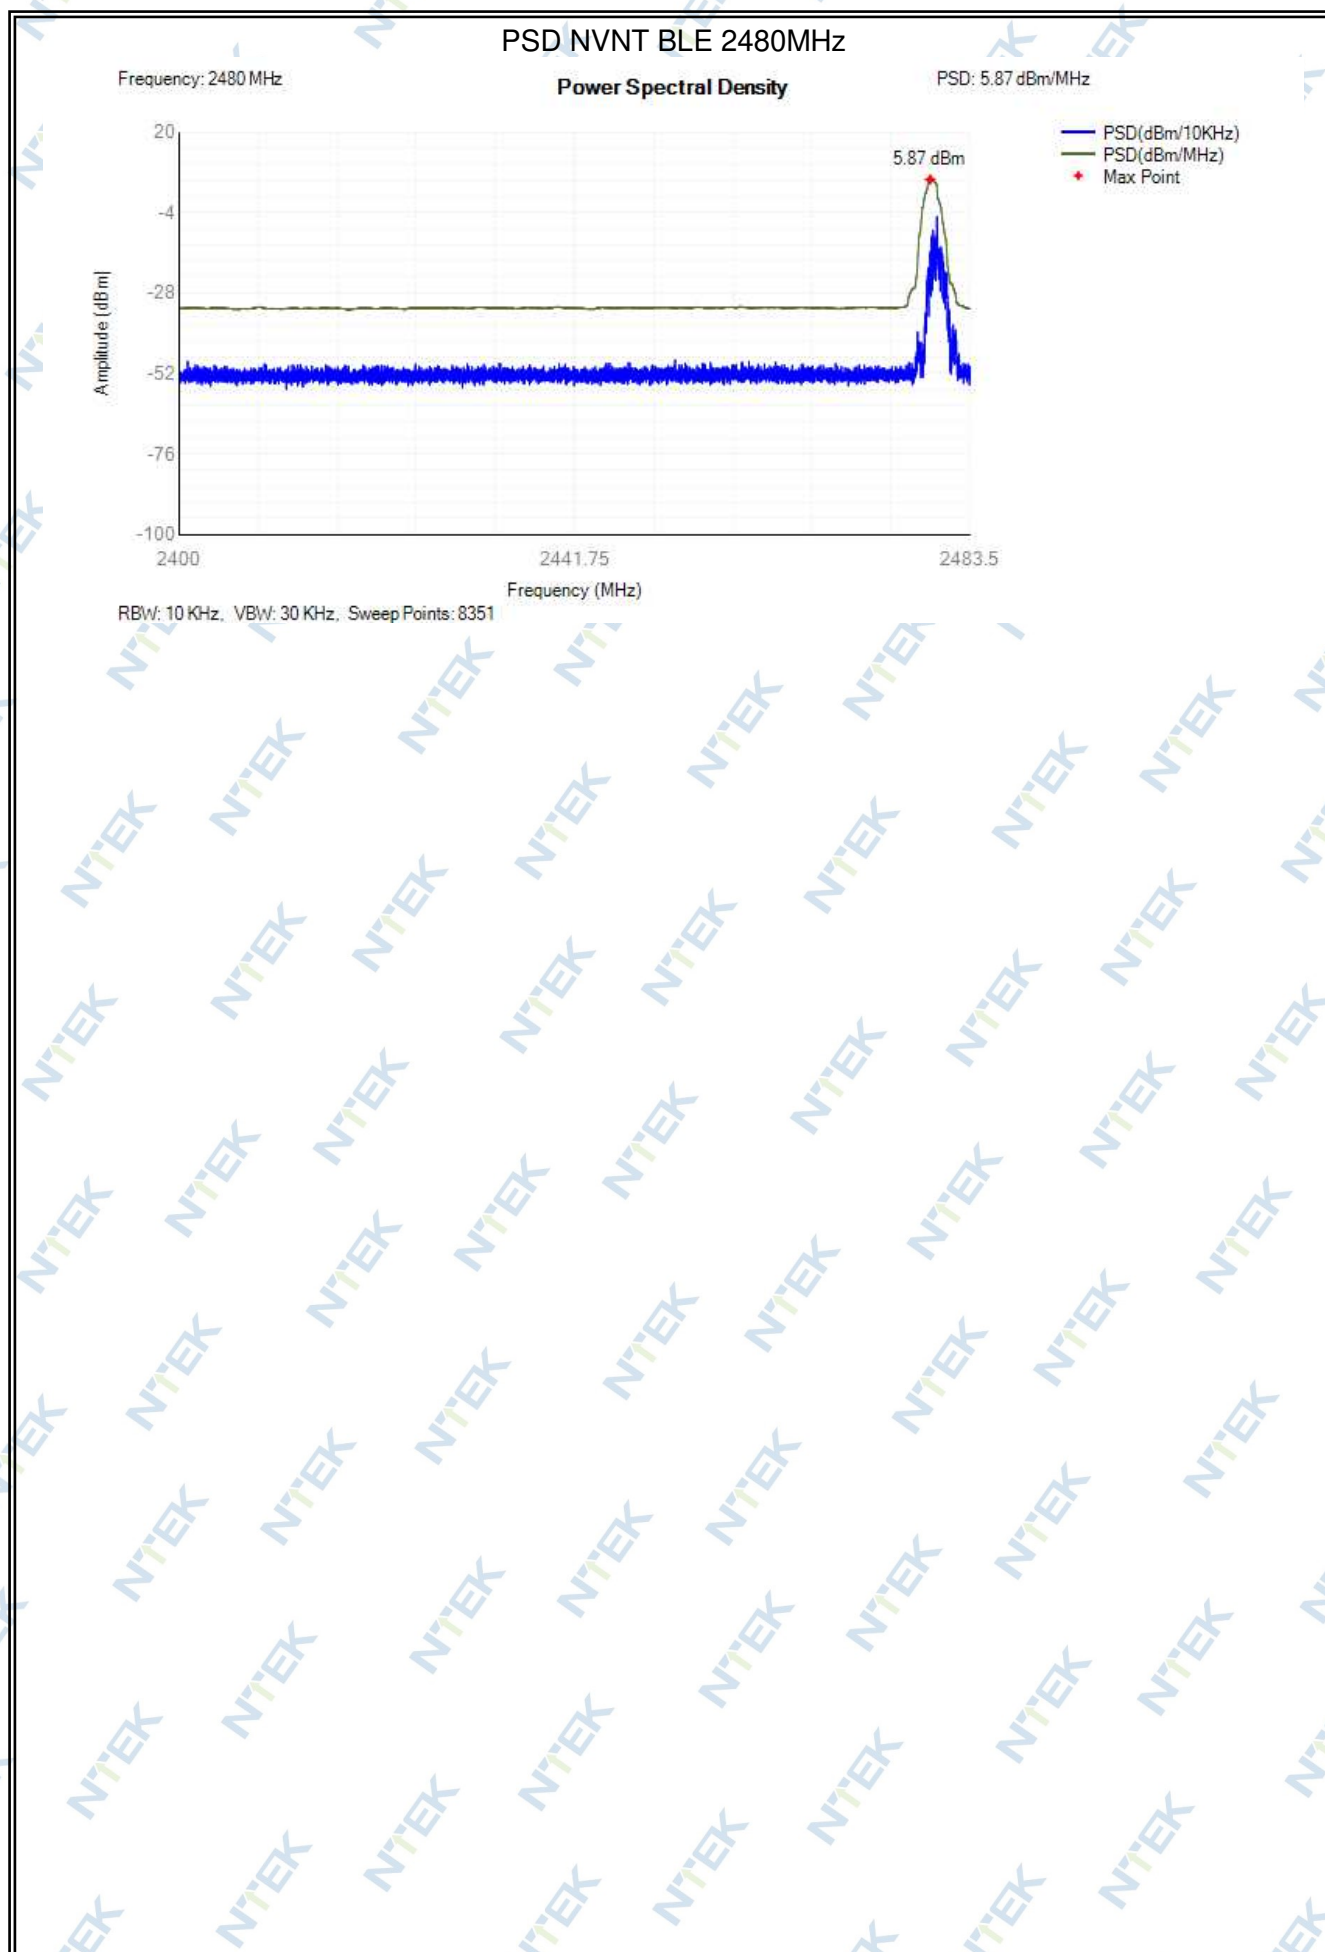


4.9 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	BLE	2402	2402.014	2.05	2400.957	2403.007	2400 - 2483.5MHz	Pass
NVNT	BLE	2440	2440.014	2.05	2438.945	2440.995	2400 - 2483.5MHz	Pass
NVNT	BLE	2480	2480.016	2.054	2478.989	2481.043	2400 - 2483.5MHz	Pass

OBW NVNT BLE 2402MHz

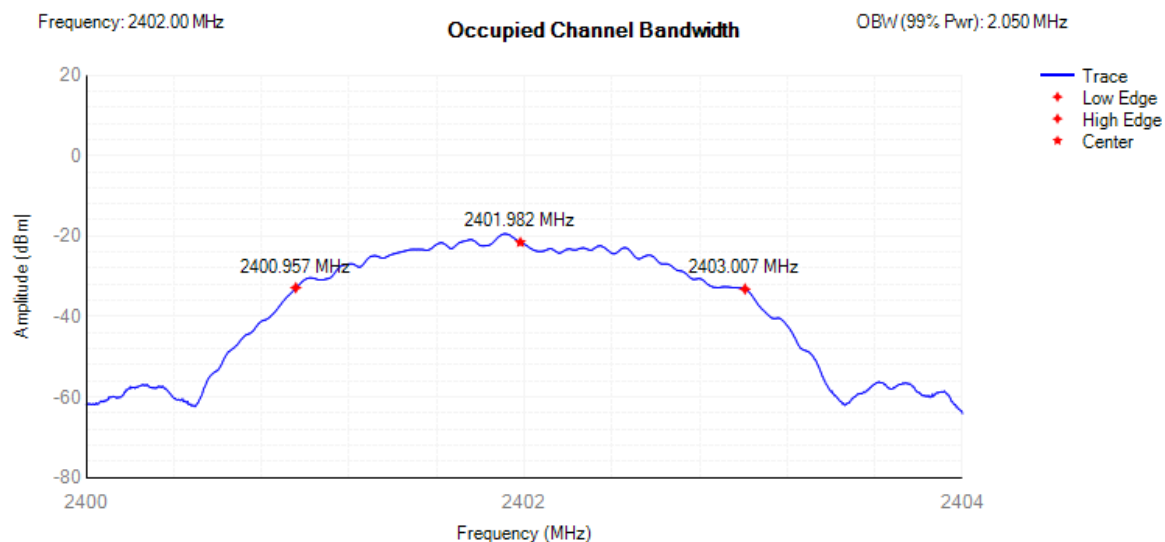

OBW NVNT BLE 2440MHz

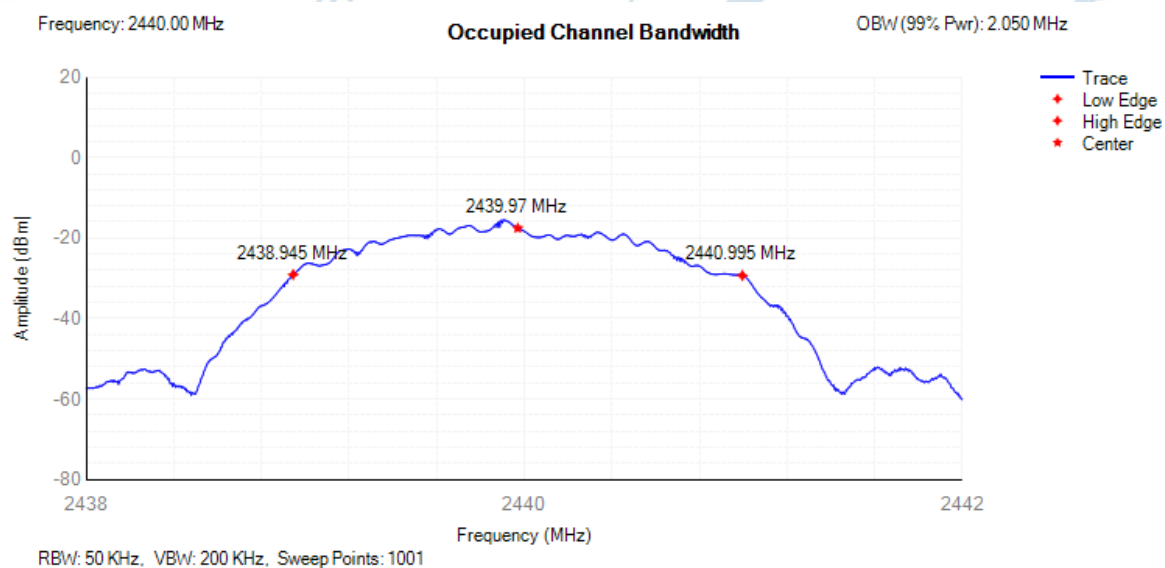


OBW NVNT BLE 2480MHz

Frequency: 2480.00 MHz

Occupied Channel Bandwidth

OBW (99% Pwr): 2.054 MHz

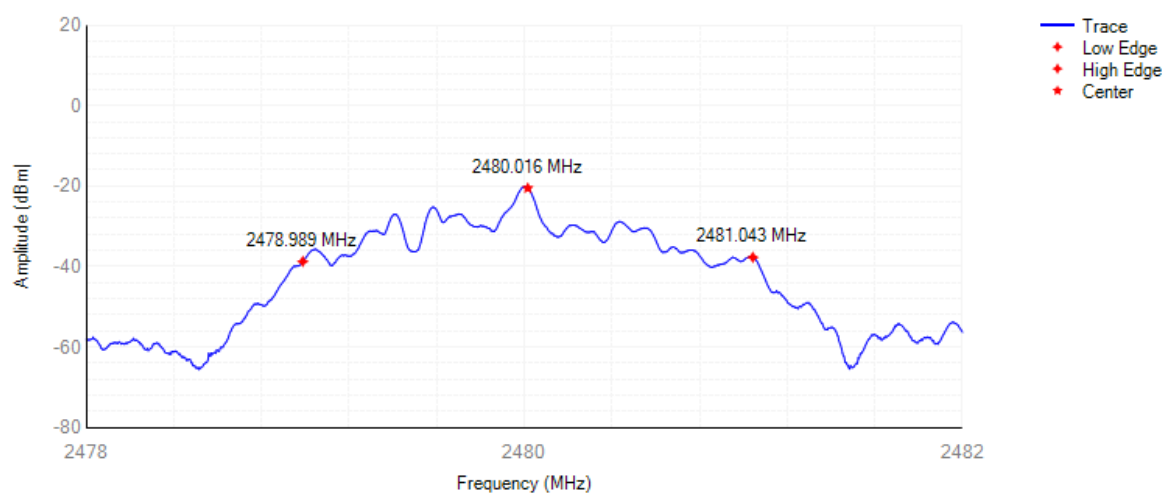


RBW: 50 KHz, VBW: 200 KHz, Sweep Points: 1001


4.10 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	2399.5	-37.12	-10	Pass
NVNT	BLE	2402	2398.5	-60.62	-10	Pass
NVNT	BLE	2402	2398.45	-61.66	-10	Pass
NVNT	BLE	2402	2397.45	-62.56	-20	Pass
NVNT	BLE	2402	2396.45	-63.25	-20	Pass
NVNT	BLE	2402	2396.4	-63.11	-20	Pass
NVNT	BLE	2480	2484	-62.66	-10	Pass
NVNT	BLE	2480	2485	-63.5	-10	Pass
NVNT	BLE	2480	2485.054	-63.09	-10	Pass
NVNT	BLE	2480	2486.054	-56.48	-20	Pass
NVNT	BLE	2480	2487.054	-63.1	-20	Pass
NVNT	BLE	2480	2487.108	-63.27	-20	Pass

Tx. Emissions OOB NVNT BLE 2402MHz

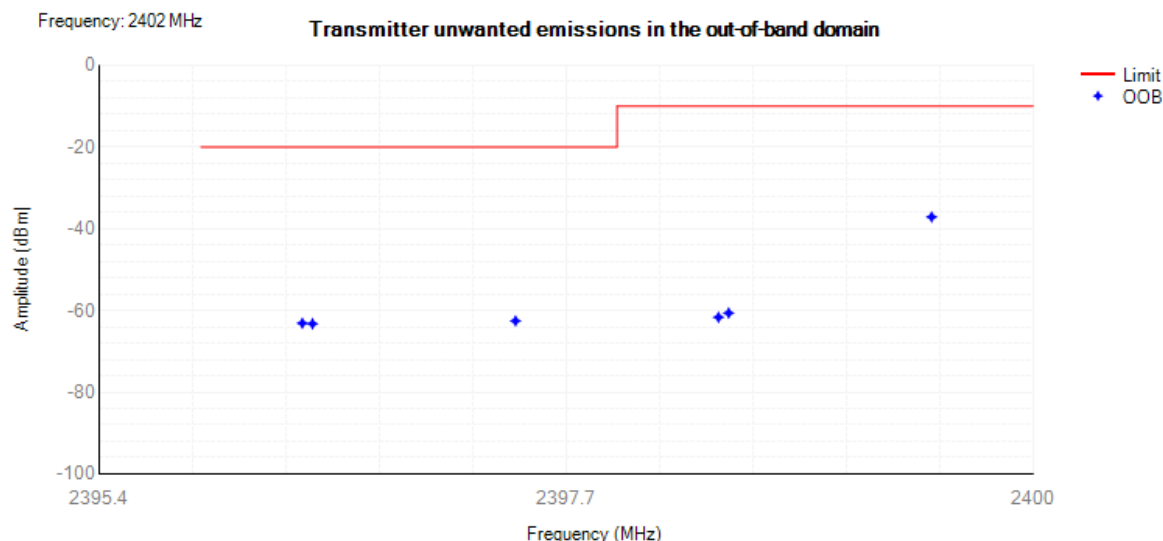

Tx. Emissions OOB NVNT BLE 2480MHz

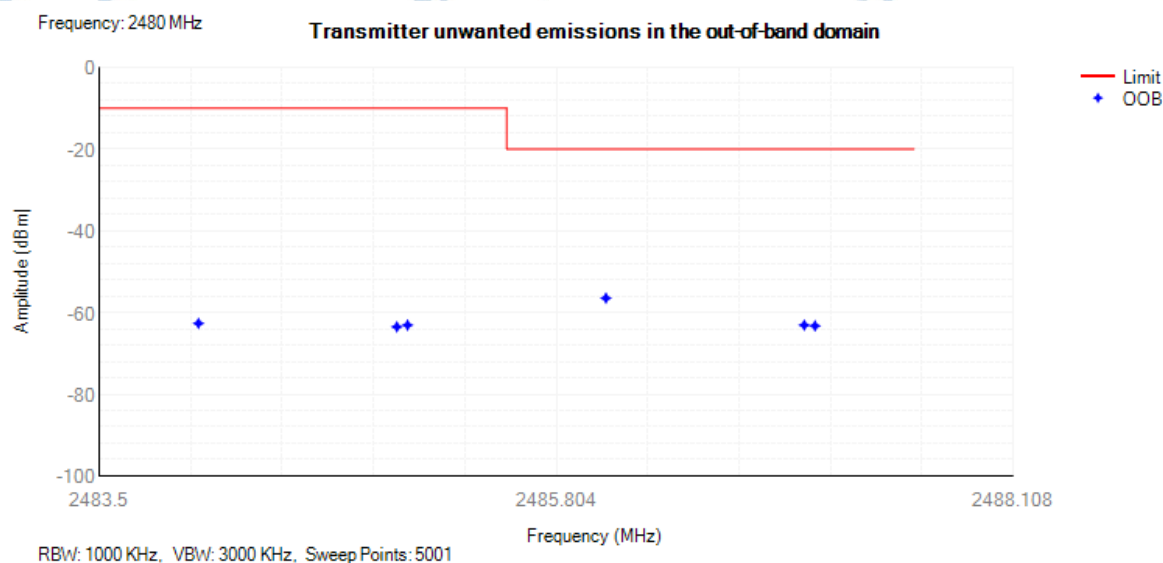


4.11 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -47 MHz	45.85	-66.16	NA	-36	Pass
NVNT	BLE	2402	47 MHz -74 MHz	62.75	-64.93	NA	-54	Pass
NVNT	BLE	2402	74 MHz -87.5 MHz	80.55	-66.45	NA	-36	Pass
NVNT	BLE	2402	87.5 MHz -118 MHz	91	-64.74	NA	-54	Pass
NVNT	BLE	2402	118 MHz -174 MHz	153.55	-64.8	NA	-36	Pass
NVNT	BLE	2402	174 MHz -230 MHz	183.85	-65.4	NA	-54	Pass
NVNT	BLE	2402	230 MHz -470 MHz	372.35	-64.69	NA	-36	Pass
NVNT	BLE	2402	470 MHz -694 MHz	504.45	-64.58	NA	-54	Pass
NVNT	BLE	2402	694 MHz -1000 MHz	988	-64.41	NA	-36	Pass
NVNT	BLE	2402	1000 MHz -2396 MHz	2394.5	-52.06	NA	-30	Pass
NVNT	BLE	2402	2487.5 MHz -12750 MHz	3202.5	-44.22	NA	-30	Pass
NVNT	BLE	2440	30 MHz -47 MHz	45.1	-66.86	NA	-36	Pass
NVNT	BLE	2440	47 MHz -74 MHz	71.55	-65.93	NA	-54	Pass
NVNT	BLE	2440	74 MHz -87.5 MHz	82.8	-66.3	NA	-36	Pass
NVNT	BLE	2440	87.5 MHz -118 MHz	90.2	-65.35	NA	-54	Pass
NVNT	BLE	2440	118 MHz -174 MHz	162.7	-65.54	NA	-36	Pass
NVNT	BLE	2440	174 MHz -230 MHz	229.45	-64.98	NA	-54	Pass
NVNT	BLE	2440	230 MHz -470 MHz	348.15	-64.01	NA	-36	Pass
NVNT	BLE	2440	470 MHz -694 MHz	658.1	-64.25	NA	-54	Pass
NVNT	BLE	2440	694 MHz -1000 MHz	940.75	-63.99	NA	-36	Pass
NVNT	BLE	2440	1000 MHz -2396 MHz	1961	-53.3	NA	-30	Pass
NVNT	BLE	2440	2487.5 MHz -12750 MHz	6794.5	-44.79	NA	-30	Pass
NVNT	BLE	2480	30 MHz -47 MHz	30.9	-66.41	NA	-36	Pass
NVNT	BLE	2480	47 MHz -74 MHz	62.55	-66.05	NA	-54	Pass
NVNT	BLE	2480	74 MHz -87.5 MHz	84.6	-67.34	NA	-36	Pass
NVNT	BLE	2480	87.5 MHz -118 MHz	97.75	-66.17	NA	-54	Pass
NVNT	BLE	2480	118 MHz -174 MHz	170.9	-65.63	NA	-36	Pass
NVNT	BLE	2480	174 MHz -230 MHz	197.3	-65.05	NA	-54	Pass
NVNT	BLE	2480	230 MHz -470 MHz	403.85	-64.01	NA	-36	Pass
NVNT	BLE	2480	470 MHz -694 MHz	637	-64.86	NA	-54	Pass
NVNT	BLE	2480	694 MHz -1000 MHz	996.3	-64.41	NA	-36	Pass
NVNT	BLE	2480	1000 MHz -2396 MHz	2346.5	-50.5	NA	-30	Pass
NVNT	BLE	2480	2487.5 MHz -12750 MHz	6886	-45.08	NA	-30	Pass

Tx. Spurious NVNT BLE 2402MHz

Frequency: 2402 MHz


Transmitter unwanted emissions in the spurious domain

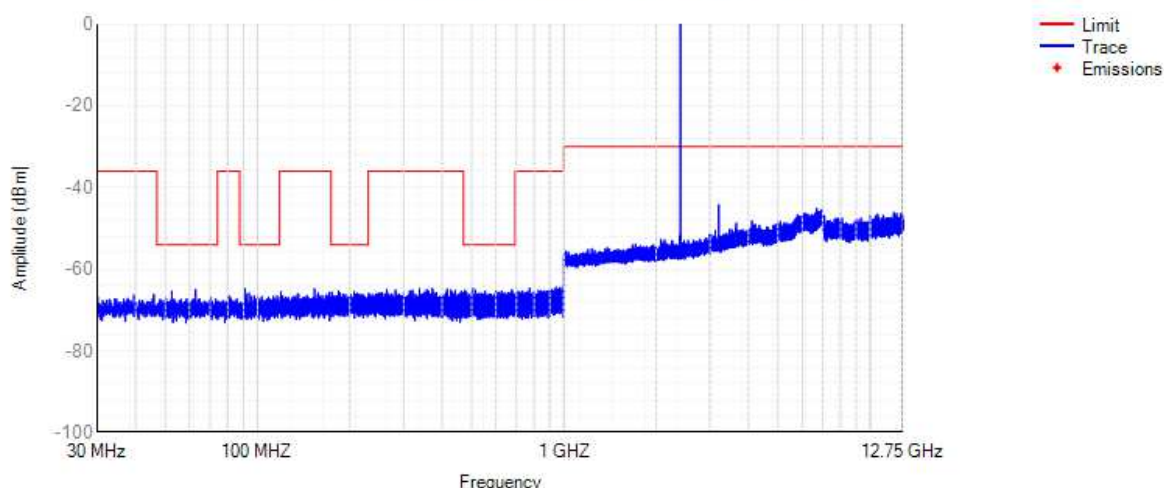

Tx. Spurious NVNT BLE 2440MHz

Frequency: 2440 MHz


Transmitter unwanted emissions in the spurious domain

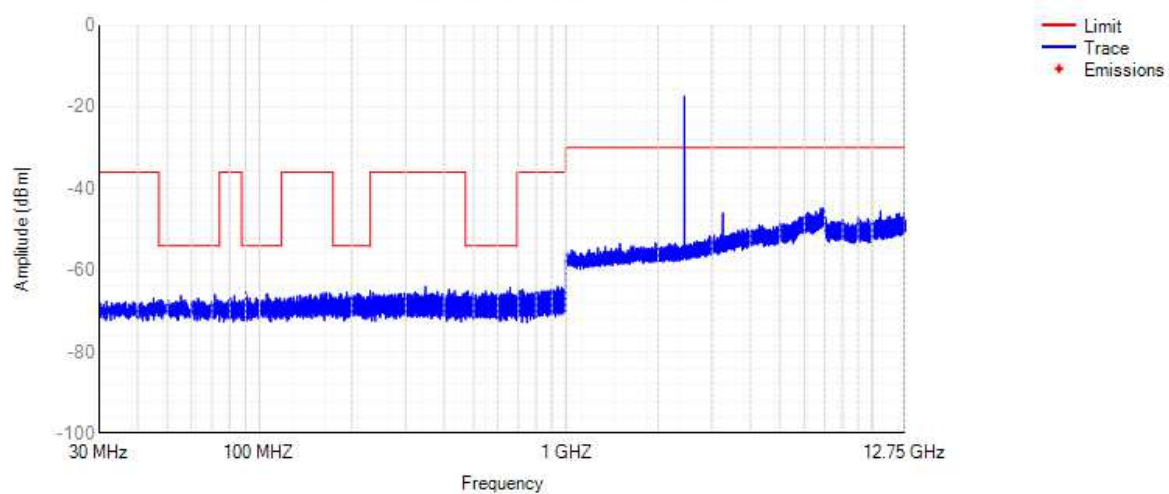

Tx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz


Transmitter unwanted emissions in the spurious domain

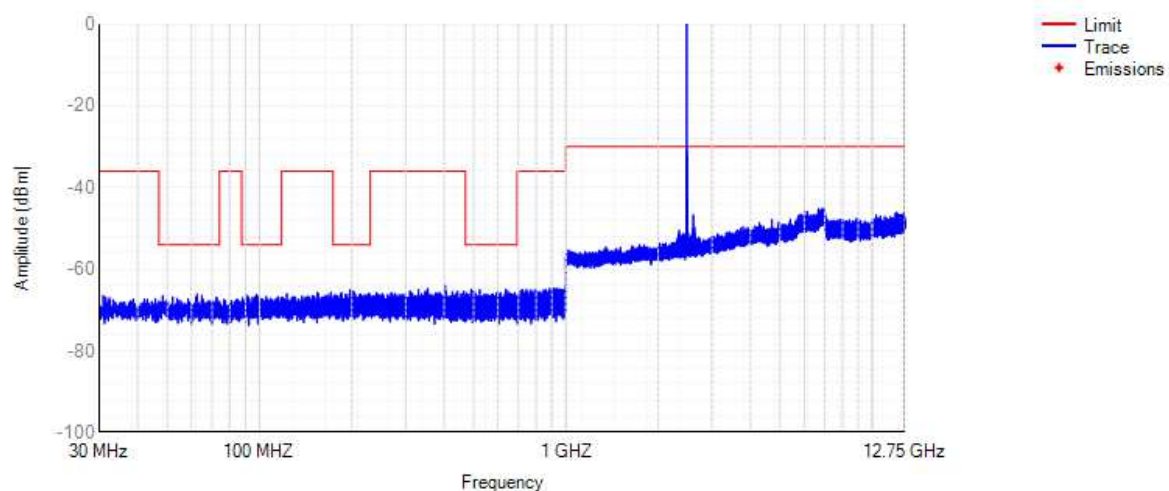


4.12 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -1000 MHz	861.85	-74.3	NA	-57	Pass
NVNT	BLE	2402	1000 MHz -12750 MHz	6882	-55.73	NA	-47	Pass
NVNT	BLE	2440	30 MHz -1000 MHz	960.75	-73.2	NA	-57	Pass
NVNT	BLE	2440	1000 MHz -12750 MHz	2473.5	-48.26	NA	-47	Pass
NVNT	BLE	2480	30 MHz -1000 MHz	881.5	-72.14	NA	-57	Pass
NVNT	BLE	2480	1000 MHz -12750 MHz	6985.5	-55.39	NA	-47	Pass

Rx. Spurious NVNT BLE 2402MHz

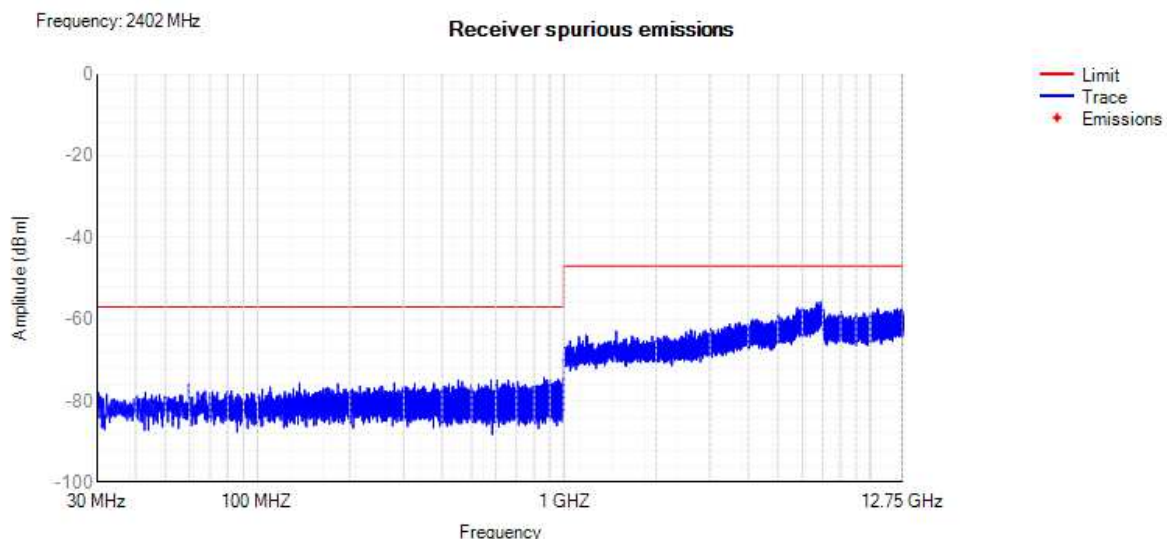


Rx. Spurious NVNT BLE 2440MHz

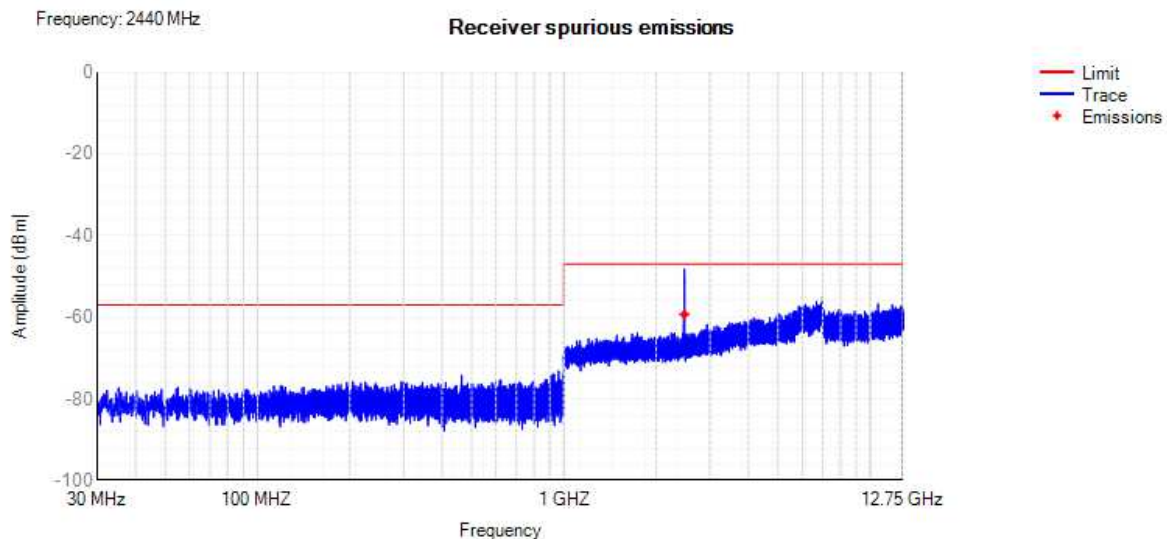

Rx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz

Receiver spurious emissions

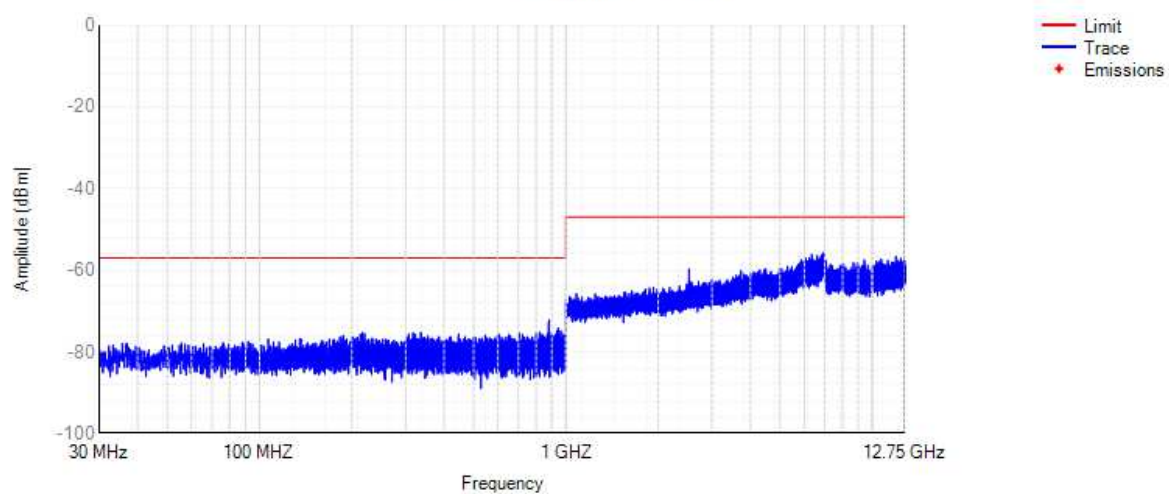


Module 6

1M


4.1 RF Output Power

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	-0.16	240	4.84	20	Pass
NVNT	BLE	2440	1.77	240	6.77	20	Pass
NVNT	BLE	2480	0.79	240	5.79	20	Pass
NVLT	BLE	2402	-1.01	240	3.99	20	Pass
NVLT	BLE	2440	0.99	240	5.99	20	Pass
NVLT	BLE	2480	0.25	240	5.25	20	Pass
NVHT	BLE	2402	-1.07	240	3.93	20	Pass
NVHT	BLE	2440	1.09	240	6.09	20	Pass
NVHT	BLE	2480	0.45	240	5.45	20	Pass


Power NVNT BLE 2402MHz

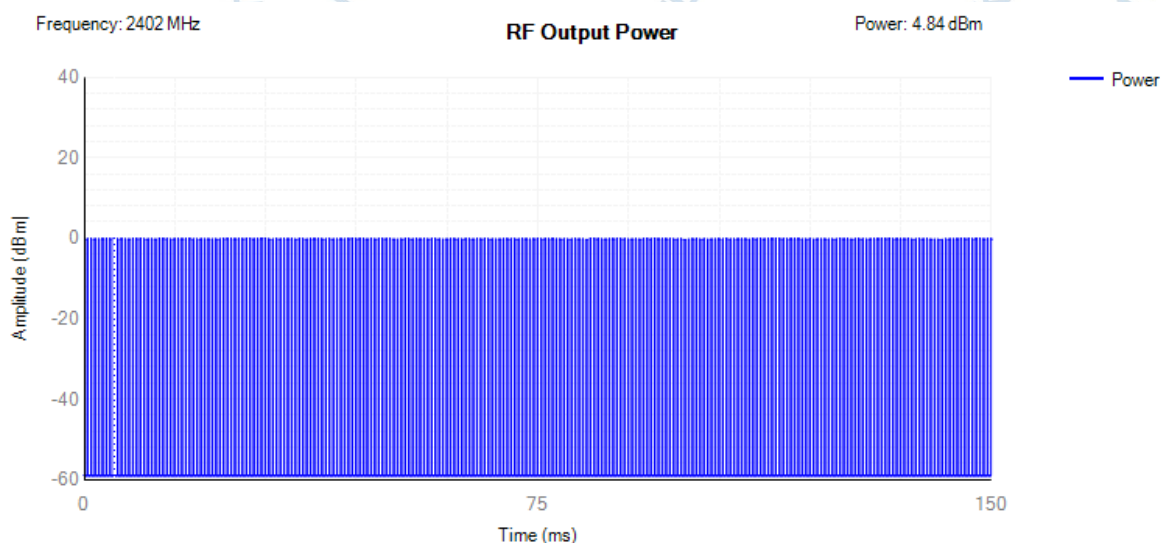

Power NVNT BLE 2440MHz

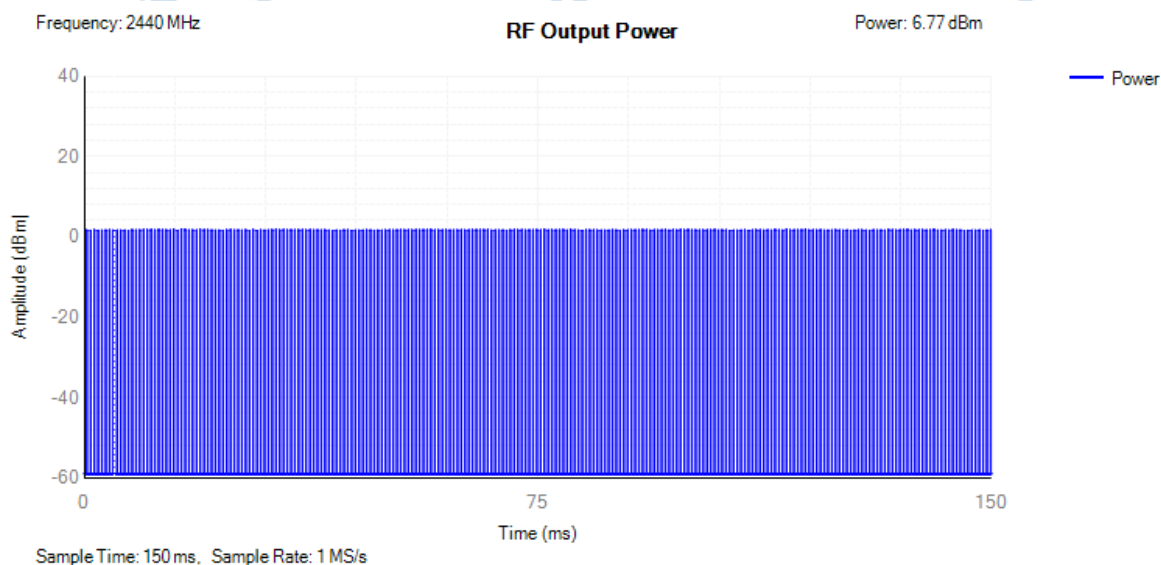


Power NVNT BLE 2480MHz

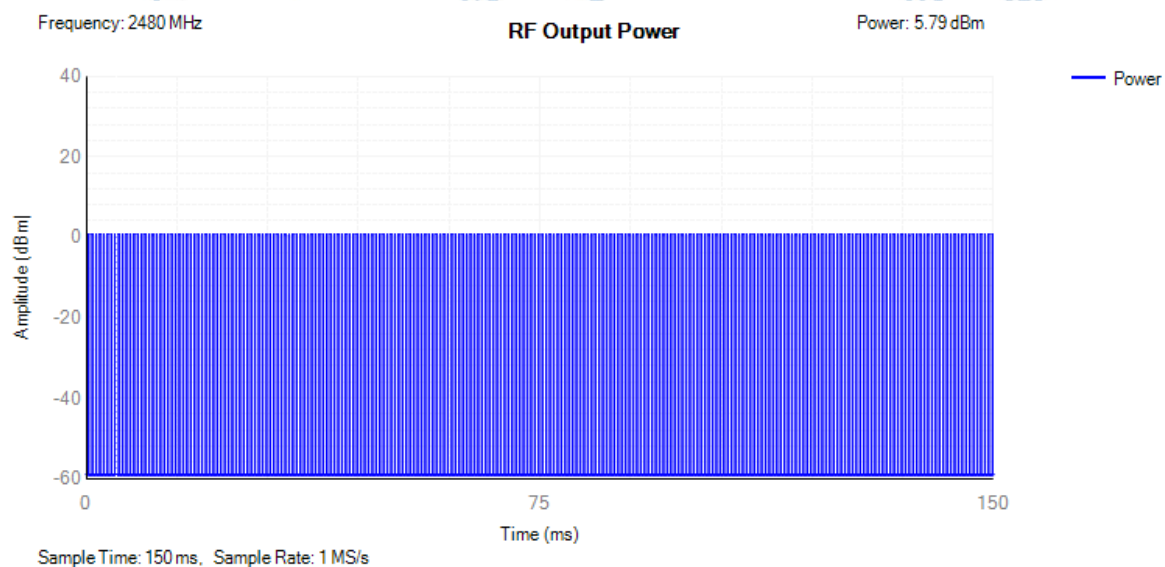


4.2 Power Spectral Density


Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	4.74	10	Pass
NVNT	BLE	2440	5.7	10	Pass
NVNT	BLE	2480	5.7	10	Pass

PSD NVNT BLE 2402MHz

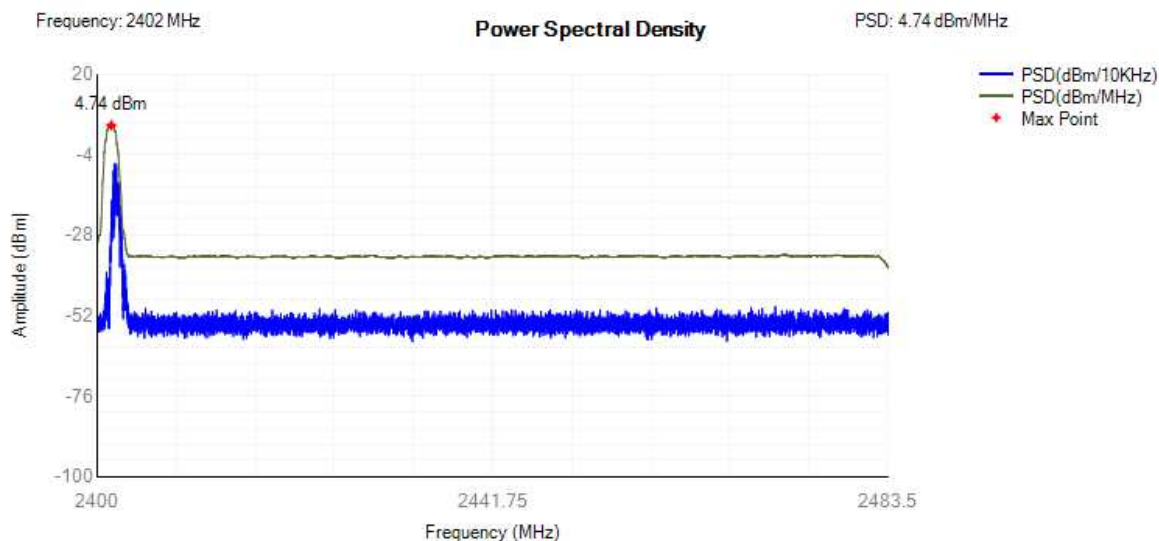

PSD NVNT BLE 2440MHz

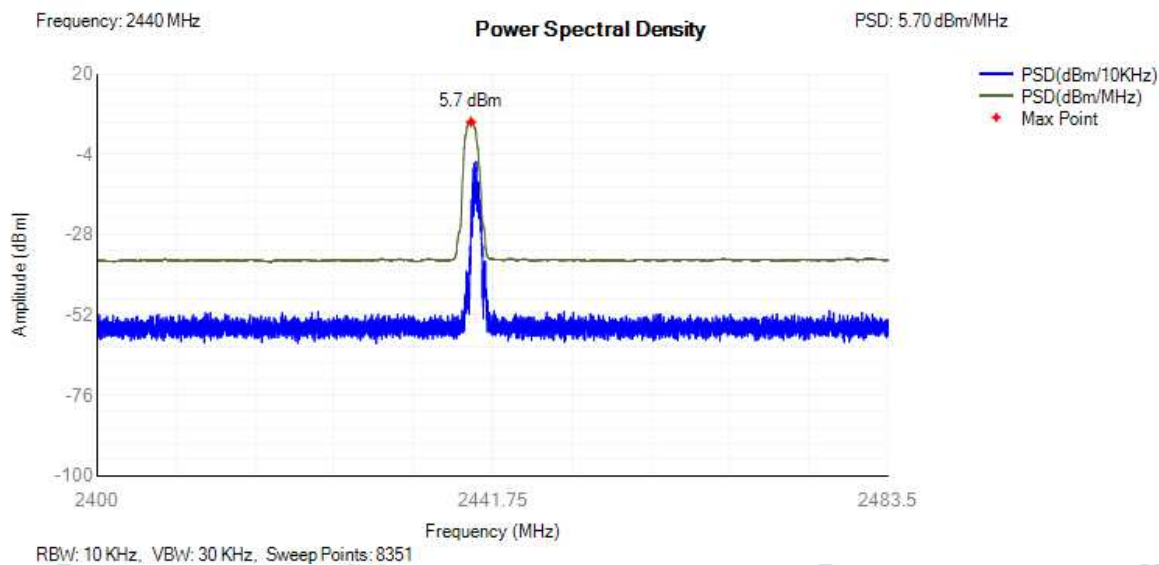


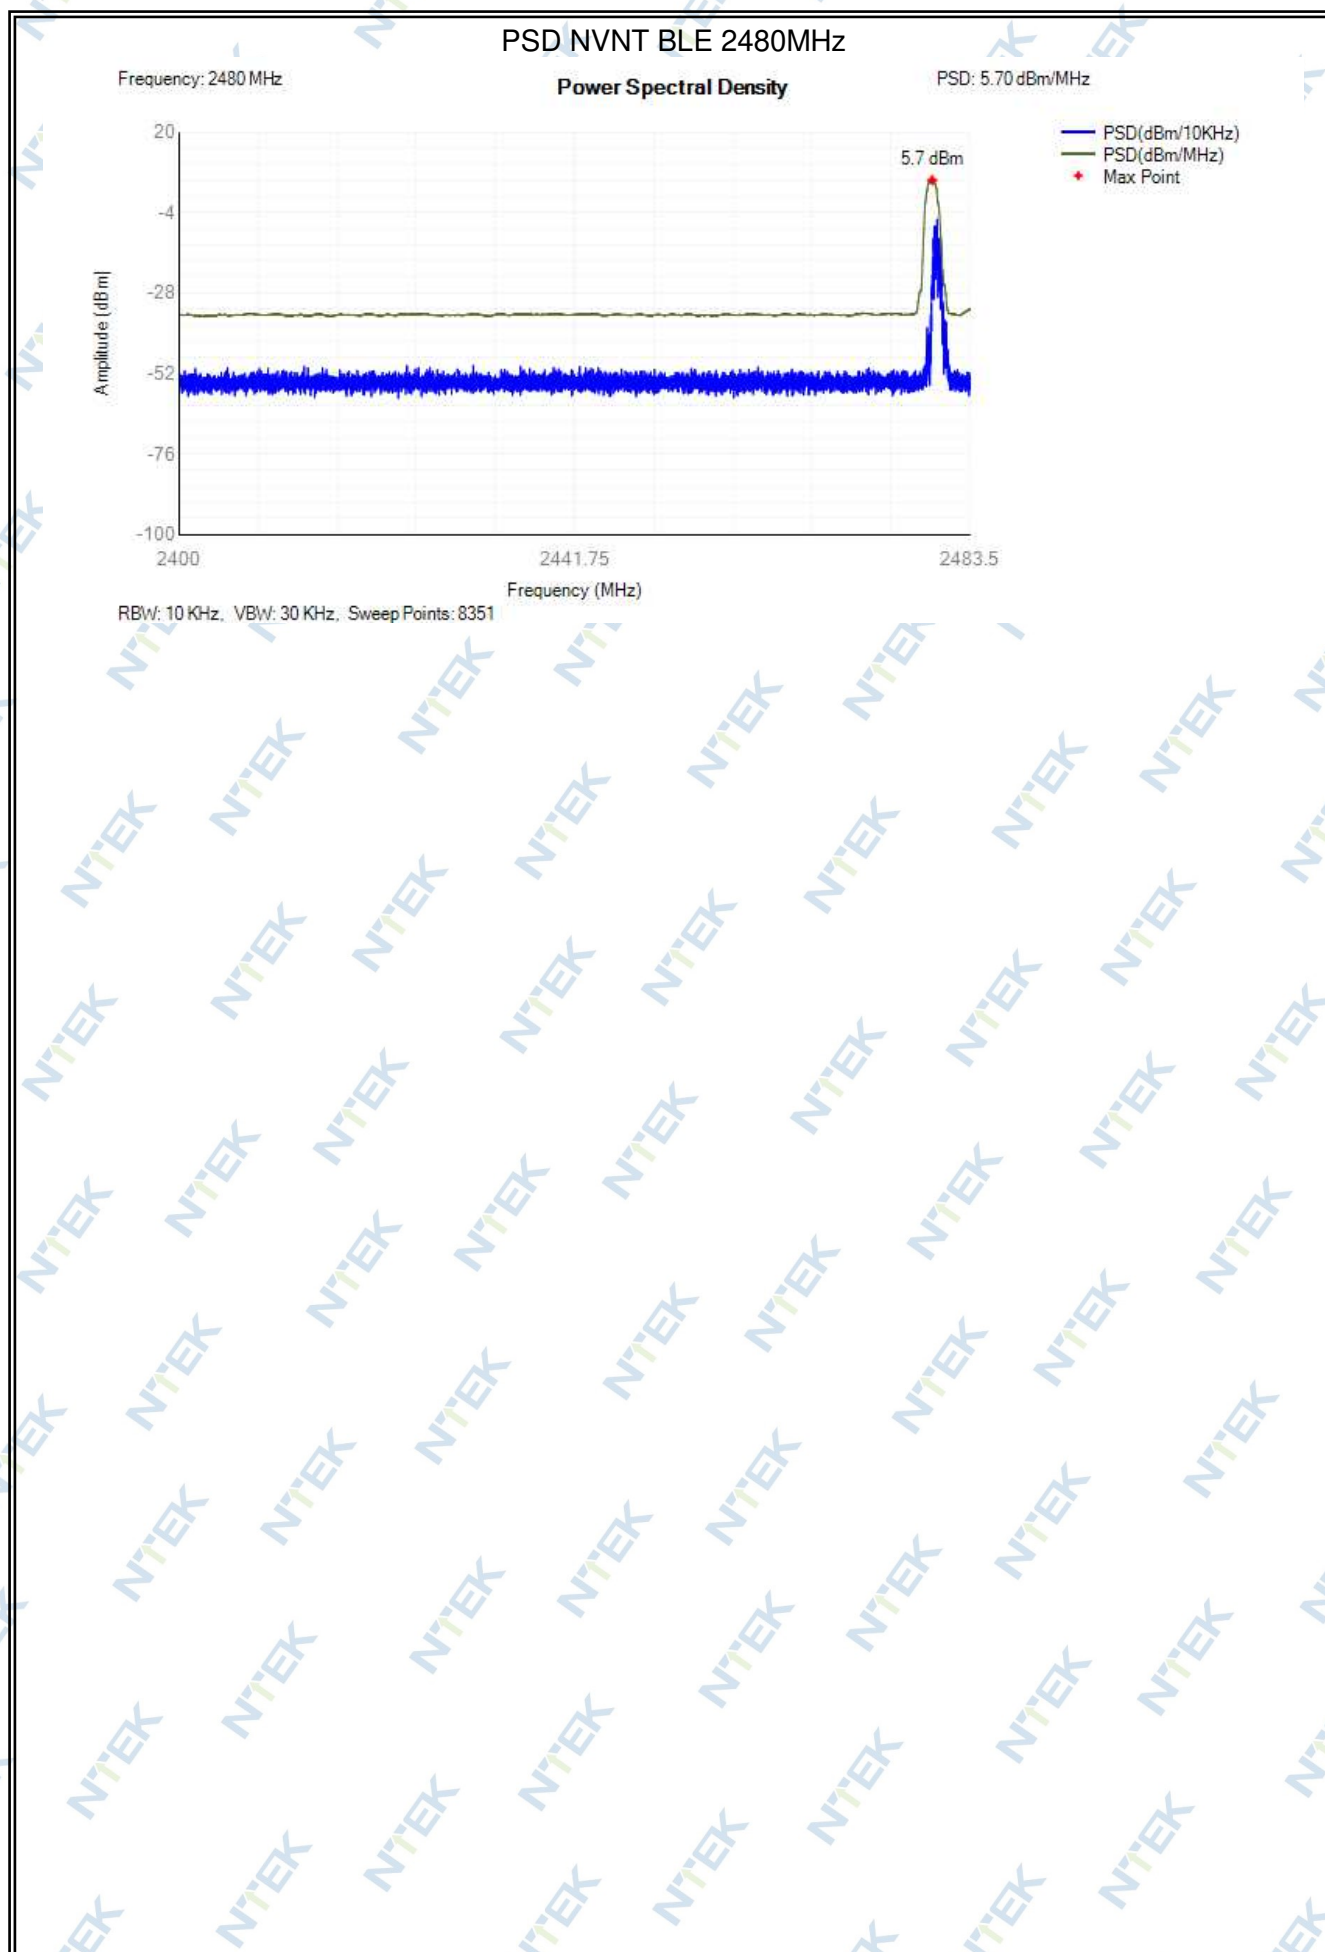


4.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	BLE	2402	2402.011	1.021	2401.501	2402.521	2400 - 2483.5MHz	Pass
NVNT	BLE	2440	2440.009	1.025	2439.497	2440.521	2400 - 2483.5MHz	Pass
NVNT	BLE	2480	2480.011	1.025	2479.499	2480.523	2400 - 2483.5MHz	Pass

OBW NVNT BLE 2402MHz

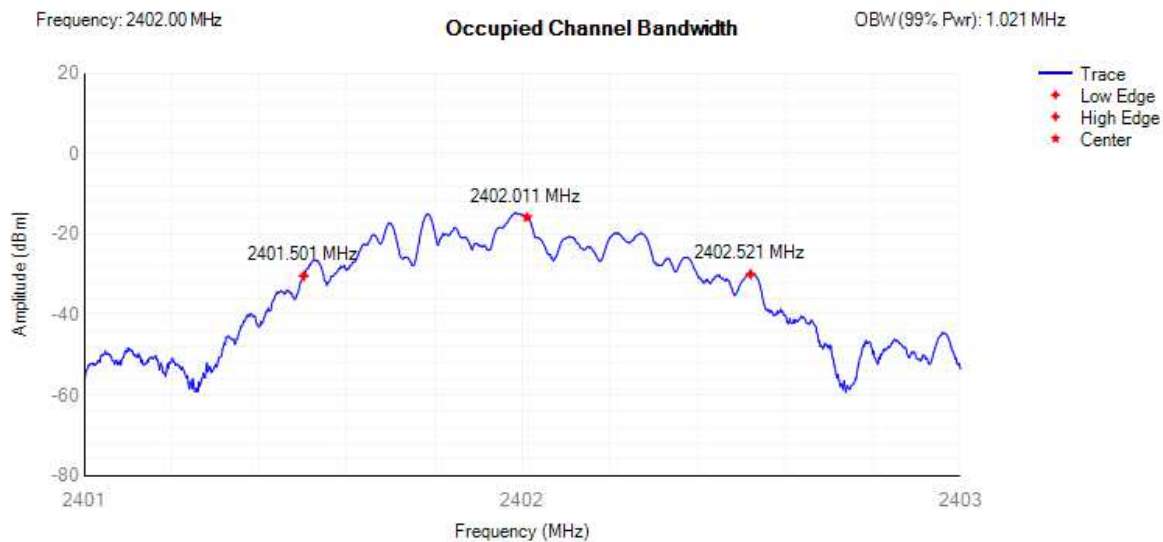

OBW NVNT BLE 2440MHz

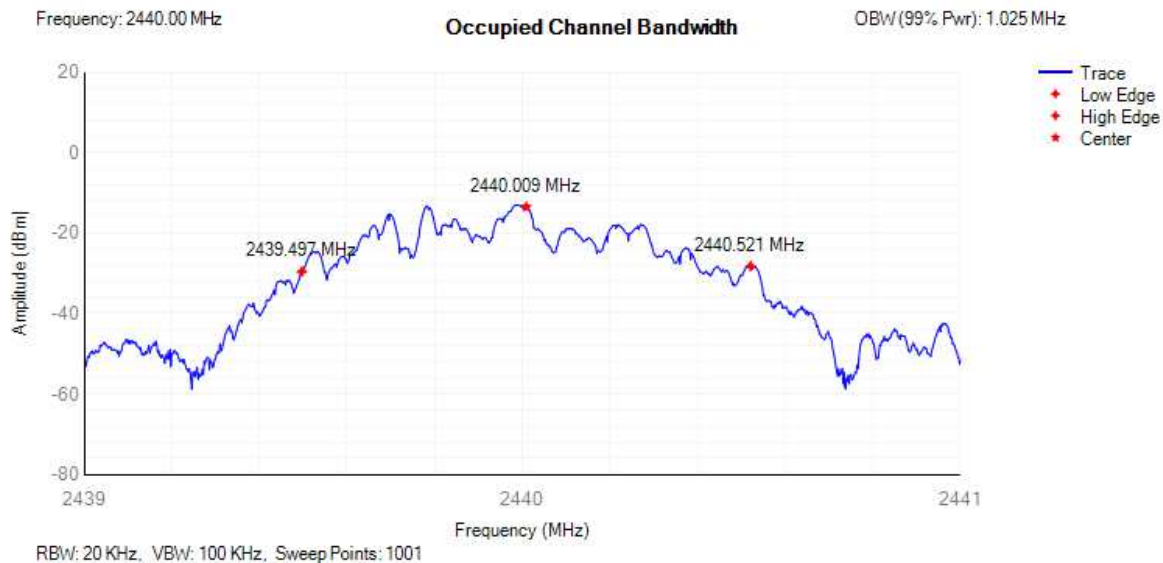


OBW NVNT BLE 2480MHz

Frequency: 2480.00 MHz

Occupied Channel Bandwidth

OBW (99% Pwr): 1.025 MHz

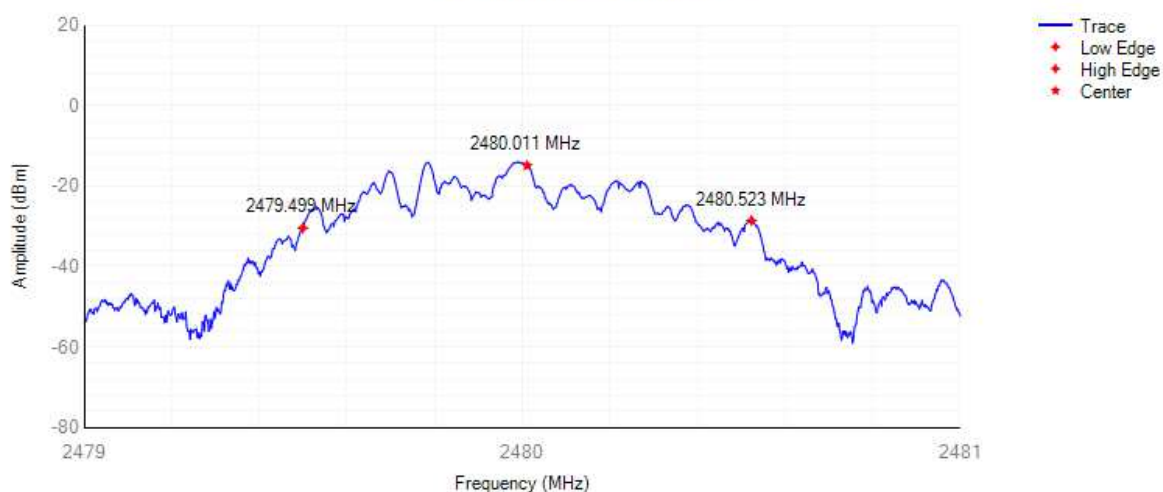


RBW: 20 KHz, VBW: 100 KHz, Sweep Points: 1001


4.4 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	2399.5	-63.95	-10	Pass
NVNT	BLE	2402	2399.479	-63.71	-10	Pass
NVNT	BLE	2402	2398.479	-63.61	-20	Pass
NVNT	BLE	2402	2398.458	-63.15	-20	Pass
NVNT	BLE	2480	2484	-58.54	-10	Pass
NVNT	BLE	2480	2484.025	-57.98	-10	Pass
NVNT	BLE	2480	2485.025	-59.12	-20	Pass
NVNT	BLE	2480	2485.05	-60.68	-20	Pass

Tx. Emissions OOB NVNT BLE 2402MHz

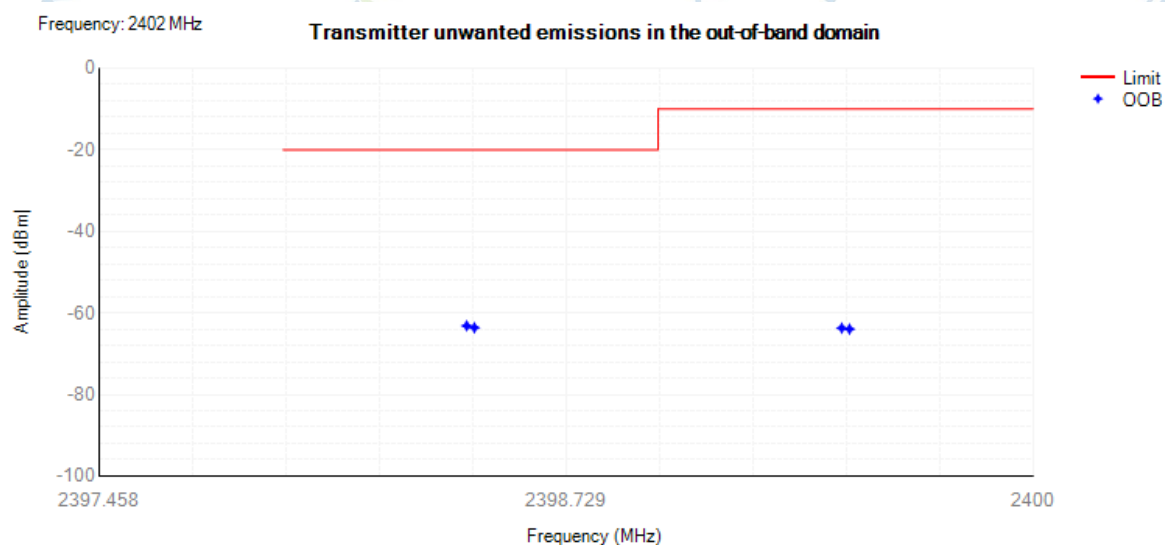

Tx. Emissions OOB NVNT BLE 2480MHz

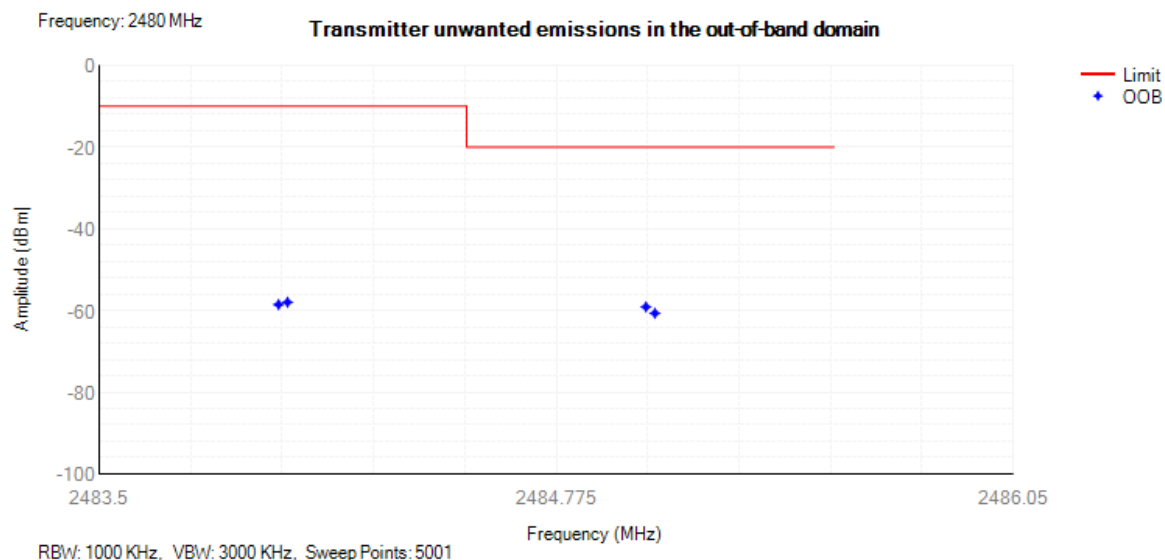


4.5 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -47 MHz	46.15	-66.9	NA	-36	Pass
NVNT	BLE	2402	47 MHz -74 MHz	54.2	-65.82	NA	-54	Pass
NVNT	BLE	2402	74 MHz -87.5 MHz	81.55	-66.08	NA	-36	Pass
NVNT	BLE	2402	87.5 MHz -118 MHz	108.85	-66.6	NA	-54	Pass
NVNT	BLE	2402	118 MHz -174 MHz	154.4	-65.65	NA	-36	Pass
NVNT	BLE	2402	174 MHz -230 MHz	198.65	-65.05	NA	-54	Pass
NVNT	BLE	2402	230 MHz -470 MHz	236	-64.51	NA	-36	Pass
NVNT	BLE	2402	470 MHz -694 MHz	529.55	-64.68	NA	-54	Pass
NVNT	BLE	2402	694 MHz -1000 MHz	769.6	-63.82	NA	-36	Pass
NVNT	BLE	2402	1000 MHz -2398 MHz	2397	-44.85	NA	-30	Pass
NVNT	BLE	2402	2485.5 MHz -12750 MHz	12718.5	-44.5	NA	-30	Pass
NVNT	BLE	2440	30 MHz -47 MHz	35.65	-66.27	NA	-36	Pass
NVNT	BLE	2440	47 MHz -74 MHz	50.35	-67.03	NA	-54	Pass
NVNT	BLE	2440	74 MHz -87.5 MHz	86.25	-65.8	NA	-36	Pass
NVNT	BLE	2440	87.5 MHz -118 MHz	111.8	-66.68	NA	-54	Pass
NVNT	BLE	2440	118 MHz -174 MHz	172.8	-65.71	NA	-36	Pass
NVNT	BLE	2440	174 MHz -230 MHz	186.2	-65.69	NA	-54	Pass
NVNT	BLE	2440	230 MHz -470 MHz	355	-64.78	NA	-36	Pass
NVNT	BLE	2440	470 MHz -694 MHz	582.85	-65.15	NA	-54	Pass
NVNT	BLE	2440	694 MHz -1000 MHz	971.75	-63.11	NA	-36	Pass
NVNT	BLE	2440	1000 MHz -2398 MHz	2311.5	-47.91	NA	-30	Pass
NVNT	BLE	2440	2485.5 MHz -12750 MHz	6627	-44.82	NA	-30	Pass
NVNT	BLE	2480	30 MHz -47 MHz	44.1	-67.03	NA	-36	Pass
NVNT	BLE	2480	47 MHz -74 MHz	61.65	-65.29	NA	-54	Pass
NVNT	BLE	2480	74 MHz -87.5 MHz	81.75	-66.83	NA	-36	Pass
NVNT	BLE	2480	87.5 MHz -118 MHz	105.45	-66.66	NA	-54	Pass
NVNT	BLE	2480	118 MHz -174 MHz	120.25	-65.41	NA	-36	Pass
NVNT	BLE	2480	174 MHz -230 MHz	209.6	-65.16	NA	-54	Pass
NVNT	BLE	2480	230 MHz -470 MHz	460.6	-64.5	NA	-36	Pass
NVNT	BLE	2480	470 MHz -694 MHz	660.15	-65.02	NA	-54	Pass
NVNT	BLE	2480	694 MHz -1000 MHz	930.85	-63.09	NA	-36	Pass
NVNT	BLE	2480	1000 MHz -2398 MHz	2326.5	-49.76	NA	-30	Pass
NVNT	BLE	2480	2485.5 MHz -12750 MHz	6893	-45.19	NA	-30	Pass

Tx. Spurious NVNT BLE 2402MHz

Frequency: 2402 MHz


Transmitter unwanted emissions in the spurious domain

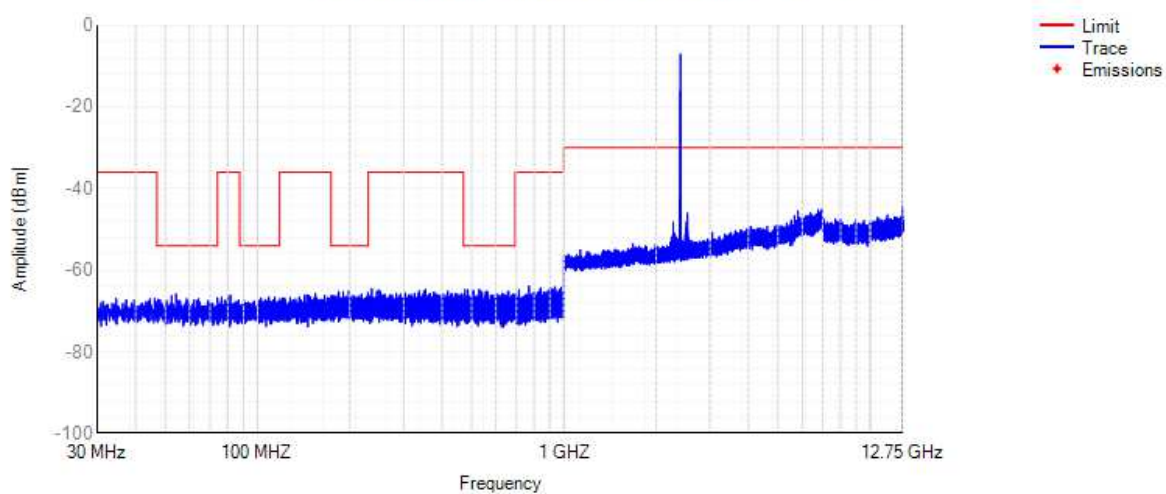

Tx. Spurious NVNT BLE 2440MHz

Frequency: 2440 MHz


Transmitter unwanted emissions in the spurious domain

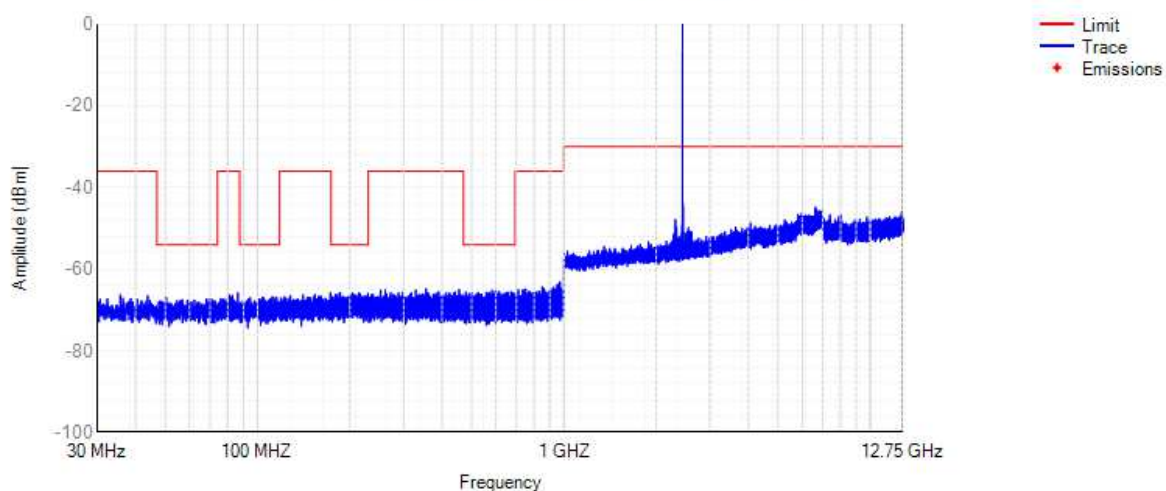

Tx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz


Transmitter unwanted emissions in the spurious domain

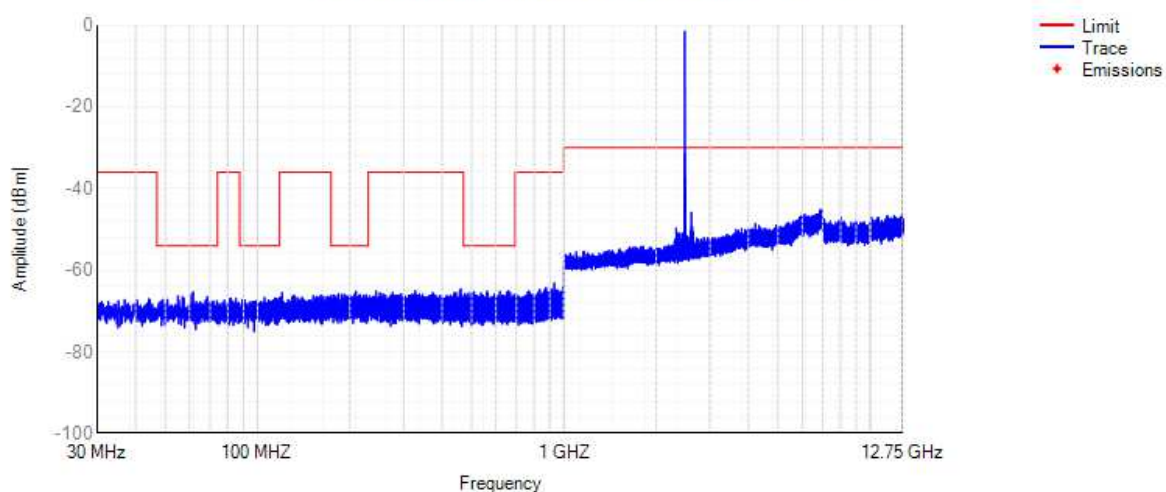


4.6 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -1000 MHz	828.795	-62.99	-81.87	-57	Pass
NVNT	BLE	2402	1000 MHz -12750 MHz	6949	-55.39	NA	-47	Pass
NVNT	BLE	2440	30 MHz -1000 MHz	829.8	-51.77	-78.07	-57	Pass
NVNT	BLE	2440	1000 MHz -12750 MHz	6951	-55.14	NA	-47	Pass
NVNT	BLE	2480	30 MHz -1000 MHz	825.55	-49.28	-62.16	-57	Pass
NVNT	BLE	2480	1000 MHz -12750 MHz	6981	-54.83	NA	-47	Pass

Rx. Spurious NVNT BLE 2402MHz

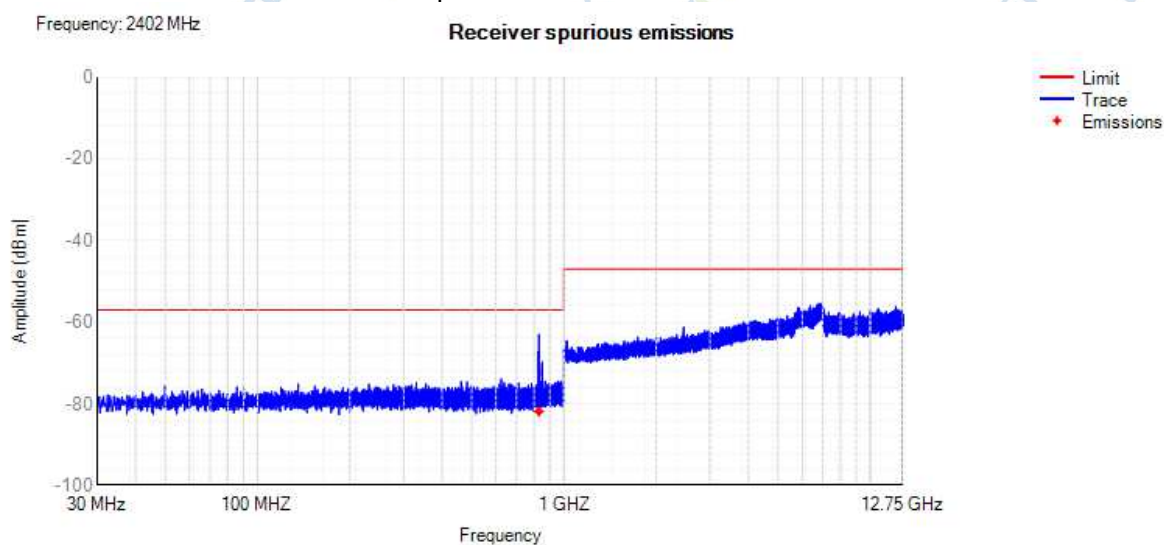


Rx. Spurious NVNT BLE 2440MHz

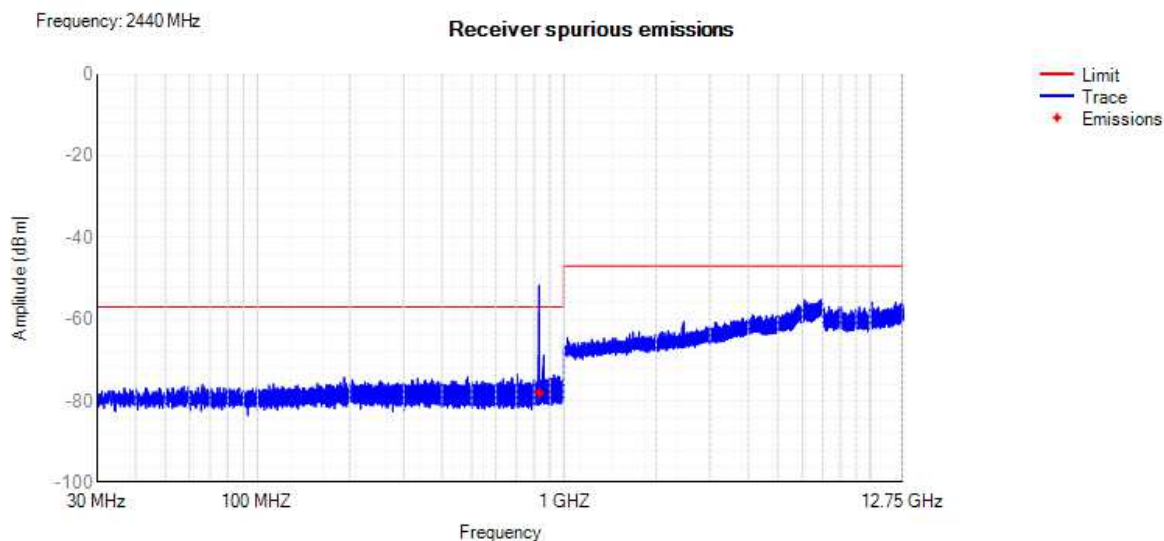

Rx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz

Receiver spurious emissions

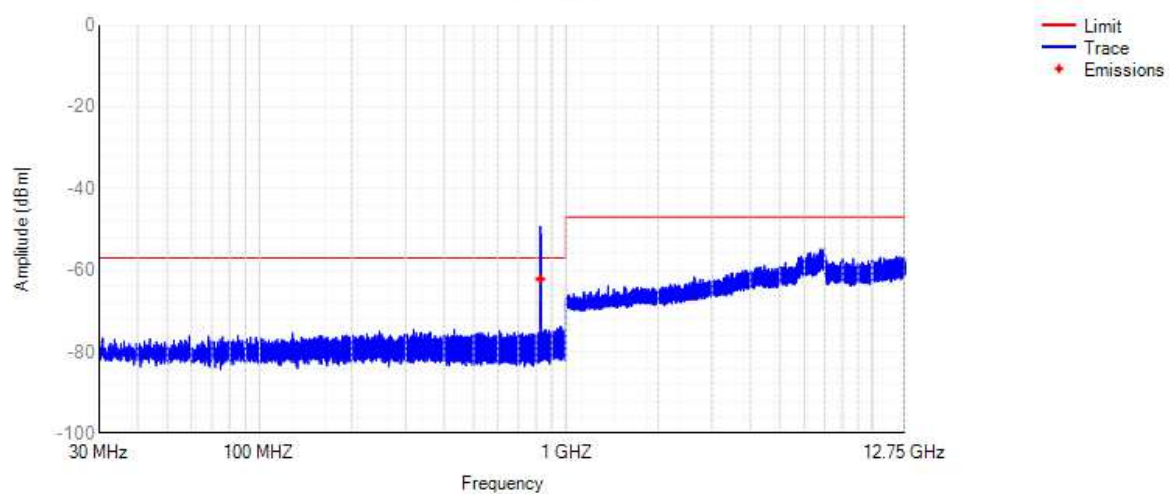


Module 6

2M


4.7 RF Output Power

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	-0.05	161	4.95	20	Pass
NVNT	BLE	2440	1.9	161	6.9	20	Pass
NVNT	BLE	2480	0.85	160	5.85	20	Pass
NVLT	BLE	2402	-0.9	160	4.1	20	Pass
NVLT	BLE	2440	1.12	160	6.12	20	Pass
NVLT	BLE	2480	0.31	160	5.31	20	Pass
NVHT	BLE	2402	-0.96	160	4.04	20	Pass
NVHT	BLE	2440	1.22	160	6.22	20	Pass
NVHT	BLE	2480	0.51	160	5.51	20	Pass


Power NVNT BLE 2402MHz

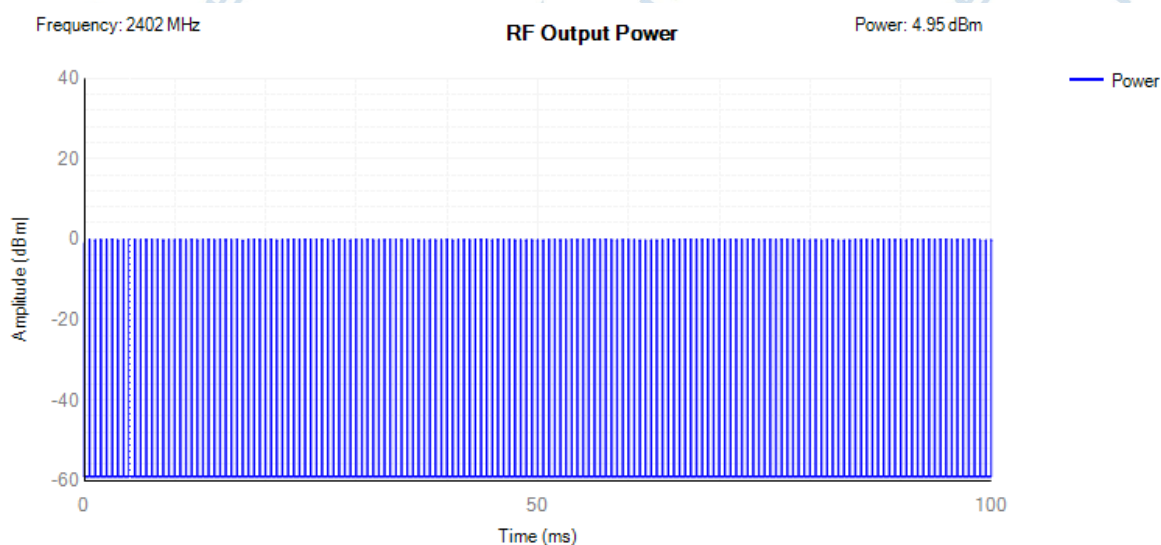

Power NVNT BLE 2440MHz

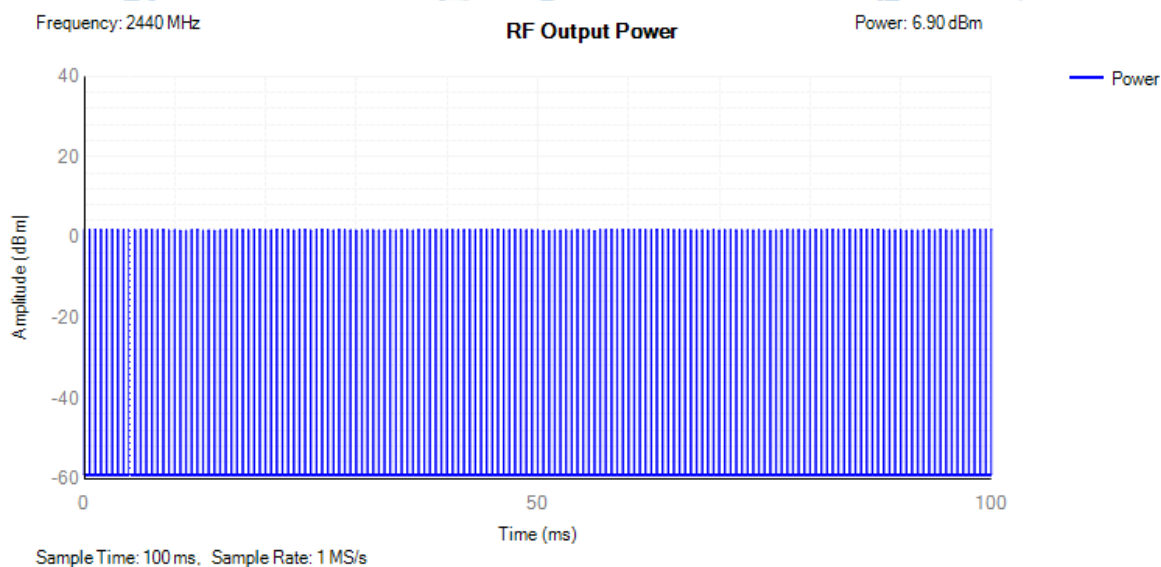


Power NVNT BLE 2480MHz

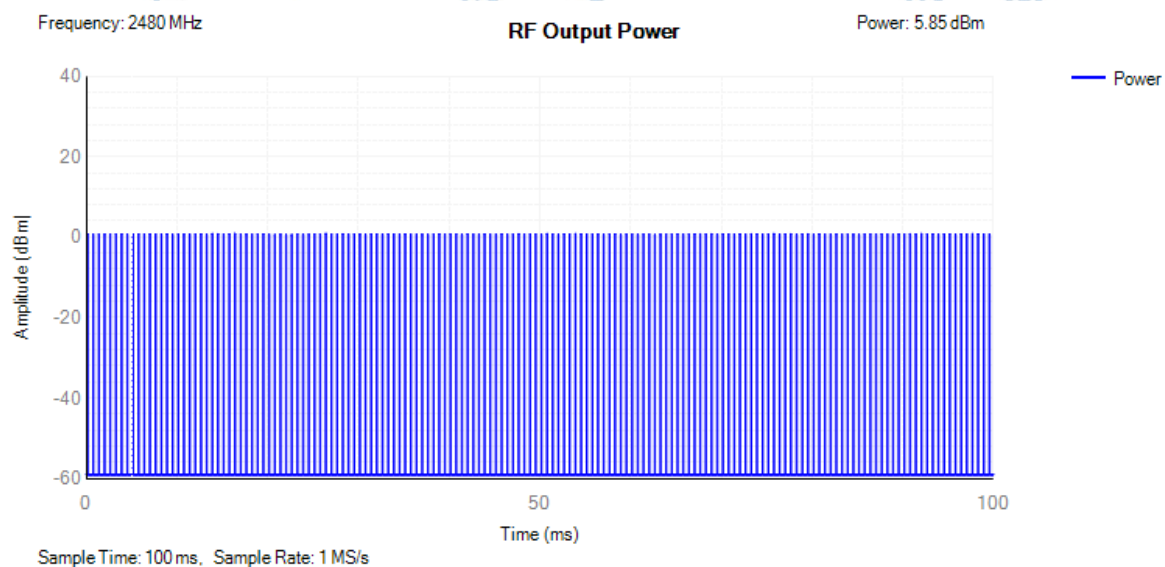


4.8 Power Spectral Density


Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	4.97	10	Pass
NVNT	BLE	2440	4.96	10	Pass
NVNT	BLE	2480	4.93	10	Pass

PSD NVNT BLE 2402MHz

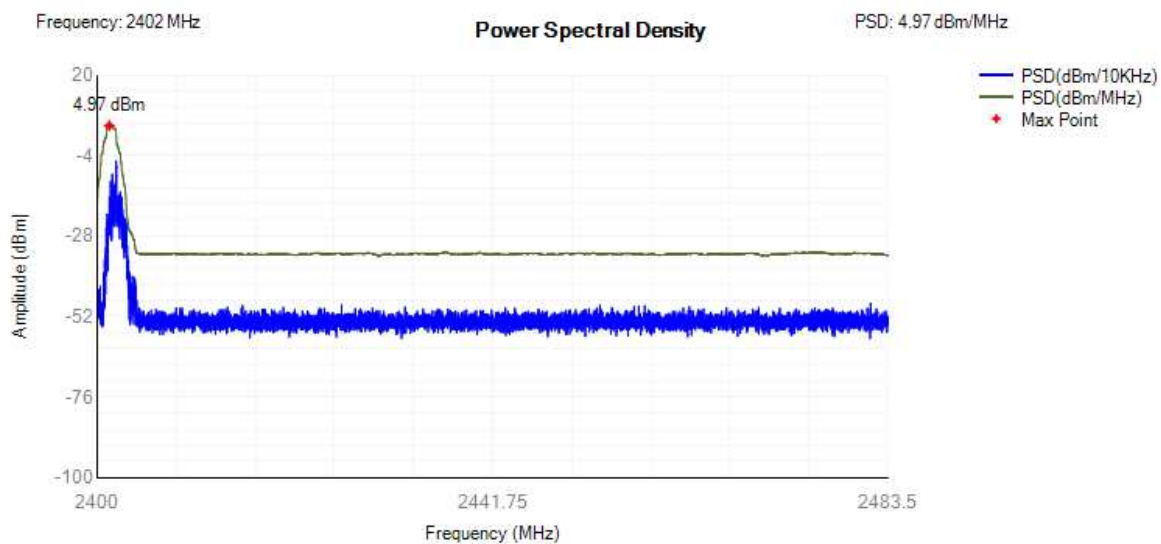

PSD NVNT BLE 2440MHz

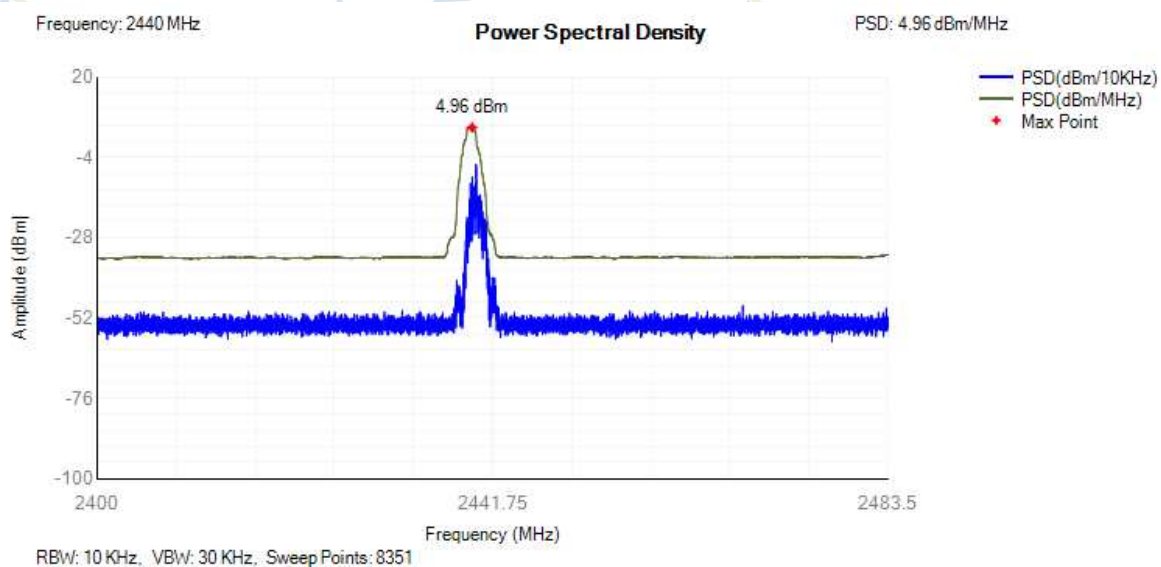


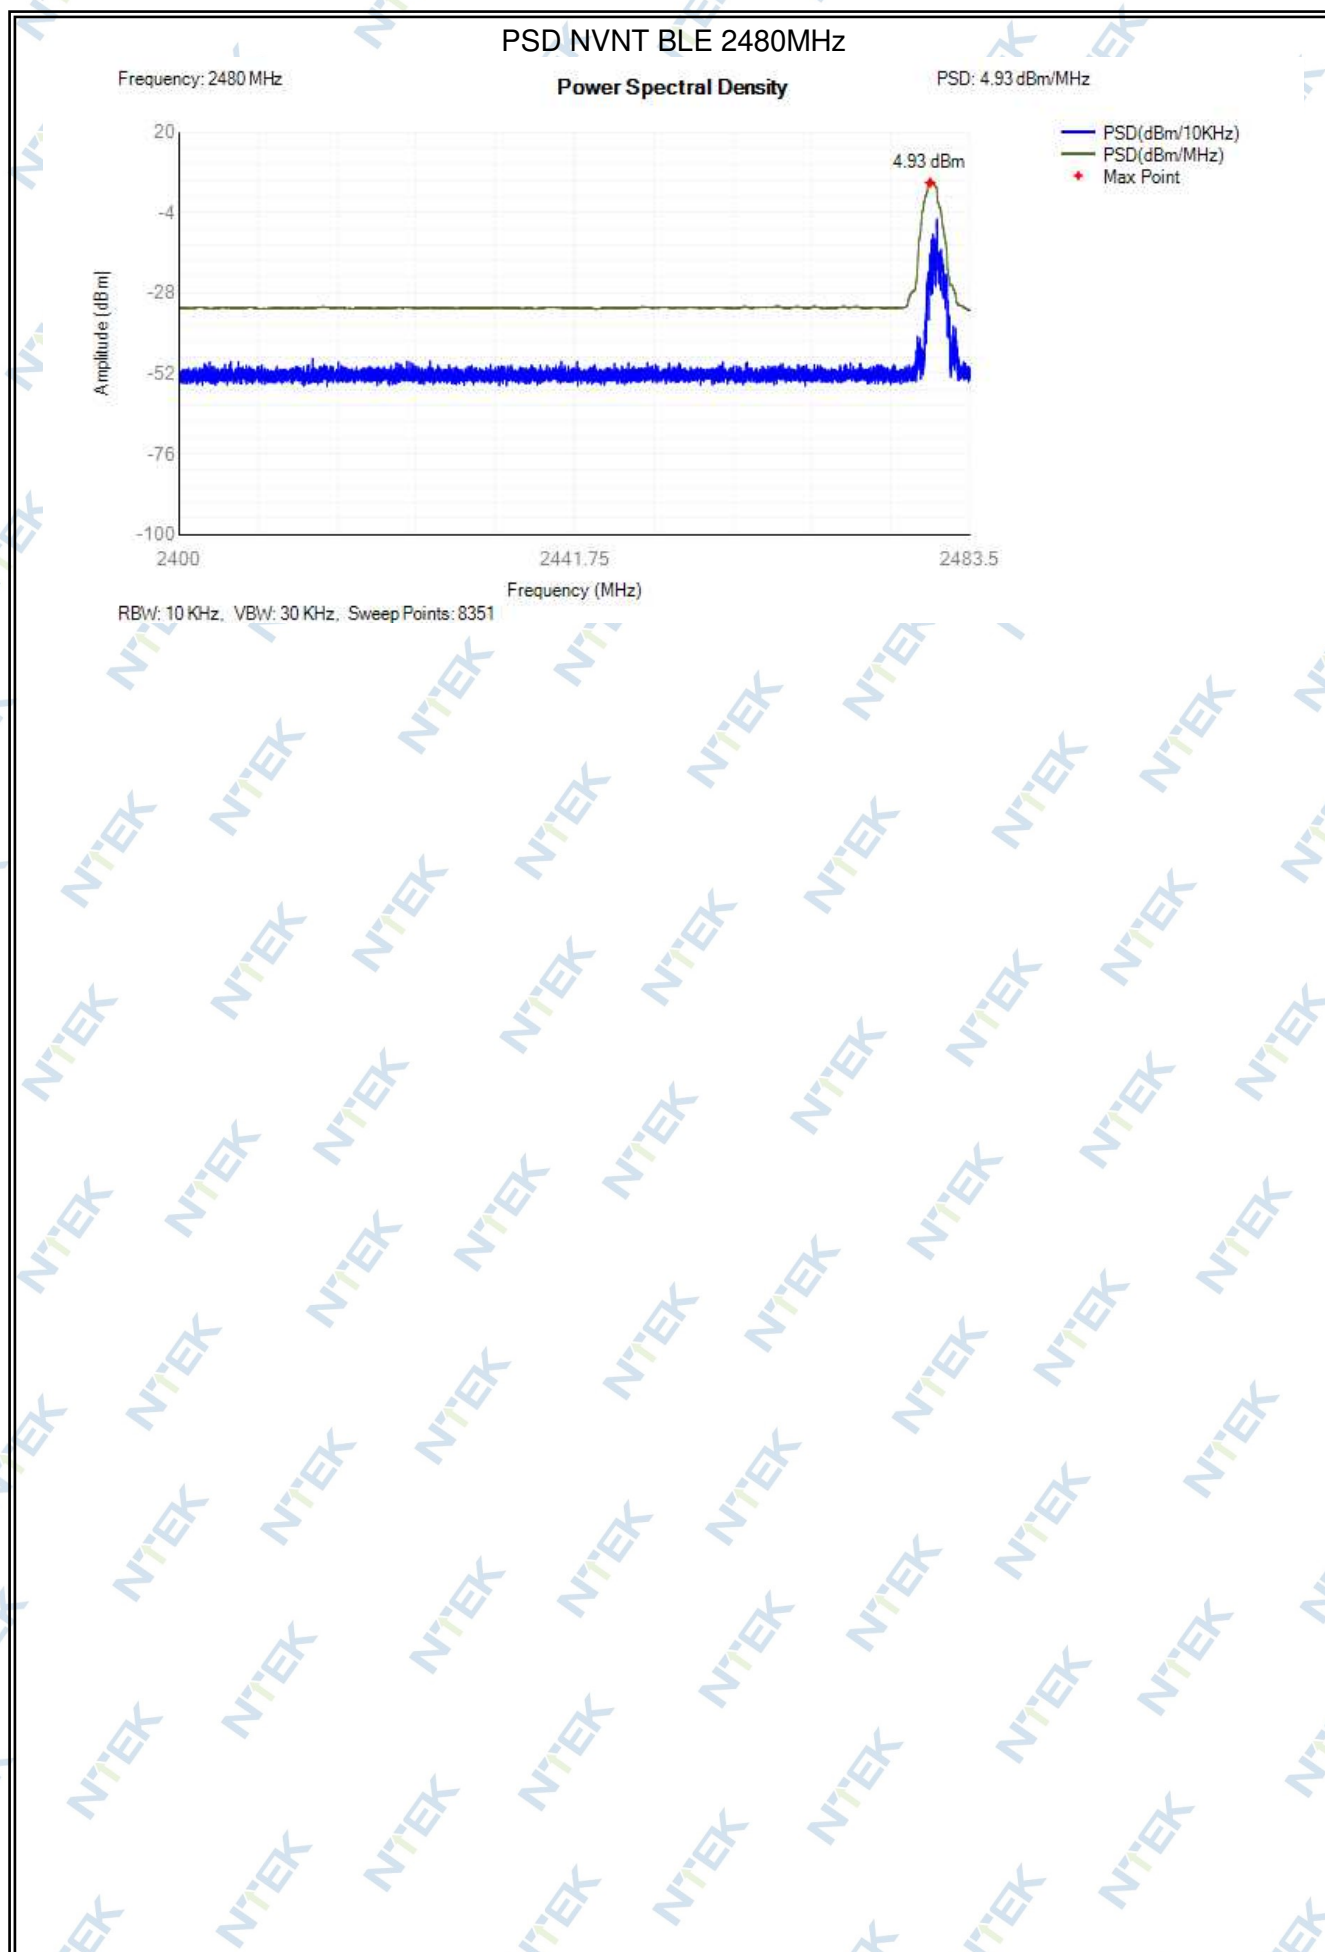

4.9 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	BLE	2402	2402.016	2.046	2400.993	2403.039	2400 - 2483.5MHz	Pass
NVNT	BLE	2440	2440.01	2.05	2438.985	2441.035	2400 - 2483.5MHz	Pass
NVNT	BLE	2480	2480.014	2.05	2478.989	2481.039	2400 - 2483.5MHz	Pass

OBW NVNT BLE 2402MHz

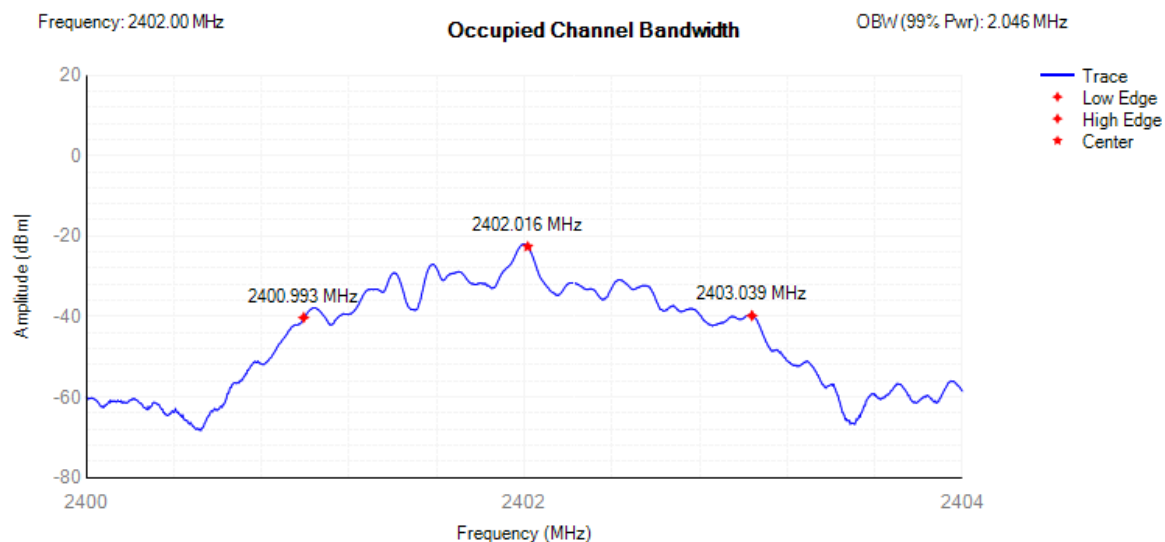

RBW: 50 KHz, VBW: 200 KHz, Sweep Points: 1001

OBW NVNT BLE 2440MHz

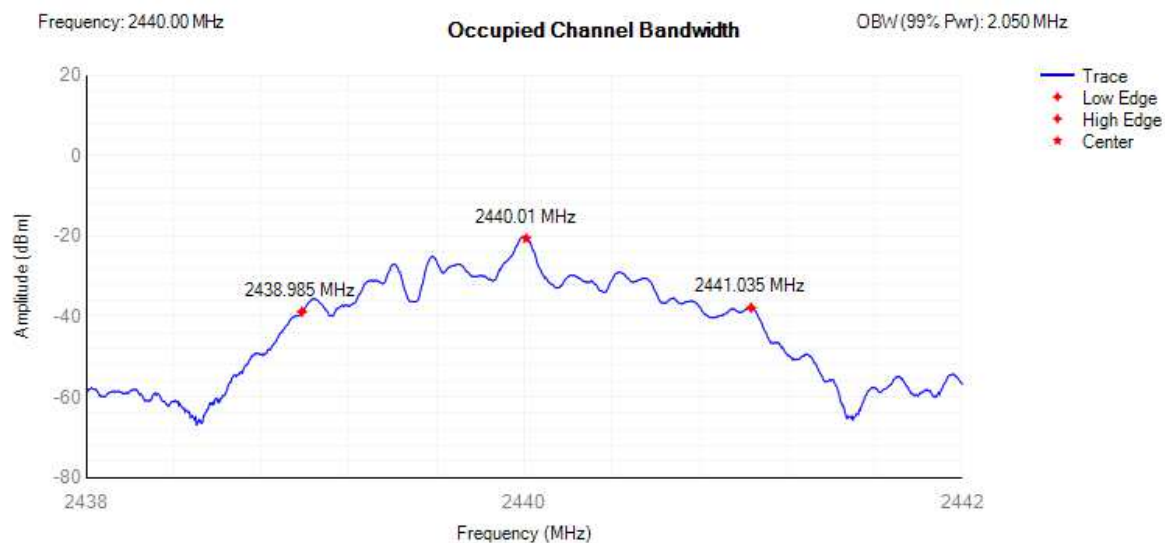


RBW: 50 KHz, VBW: 200 KHz, Sweep Points: 1001

OBW NVNT BLE 2480MHz

Frequency: 2480.00 MHz

Occupied Channel Bandwidth

OBW (99% Pwr): 2.050 MHz

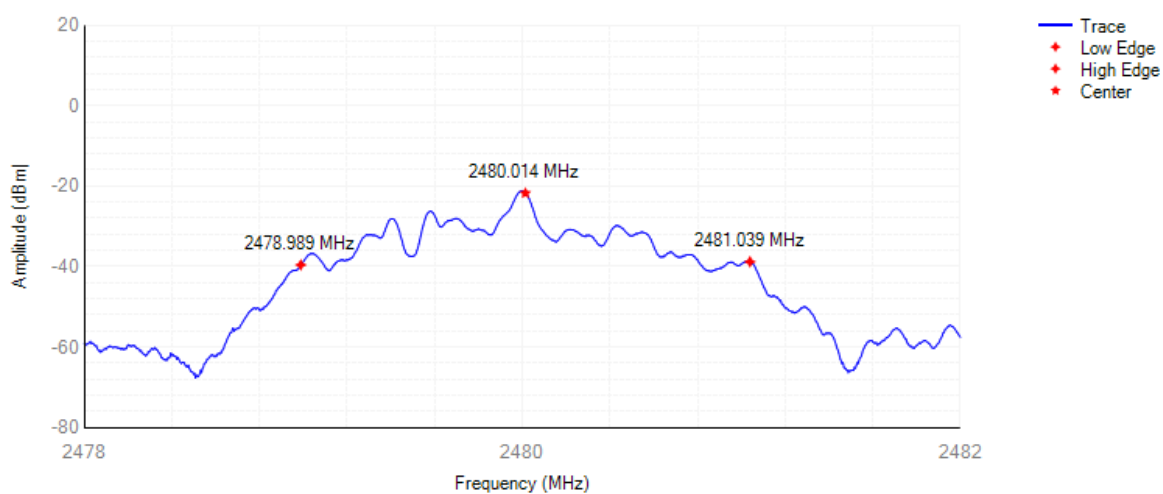


RBW: 50 KHz, VBW: 200 KHz, Sweep Points: 1001


4.10 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	2399.5	-37.05	-10	Pass
NVNT	BLE	2402	2398.5	-62.76	-10	Pass
NVNT	BLE	2402	2398.454	-63.78	-10	Pass
NVNT	BLE	2402	2397.454	-63.35	-20	Pass
NVNT	BLE	2402	2396.454	-62.86	-20	Pass
NVNT	BLE	2402	2396.408	-61.02	-20	Pass
NVNT	BLE	2480	2484	-63.1	-10	Pass
NVNT	BLE	2480	2485	-63.73	-10	Pass
NVNT	BLE	2480	2485.05	-63.12	-10	Pass
NVNT	BLE	2480	2486.05	-63.38	-20	Pass
NVNT	BLE	2480	2487.05	-64.15	-20	Pass
NVNT	BLE	2480	2487.1	-63.97	-20	Pass

Tx. Emissions OOB NVNT BLE 2402MHz

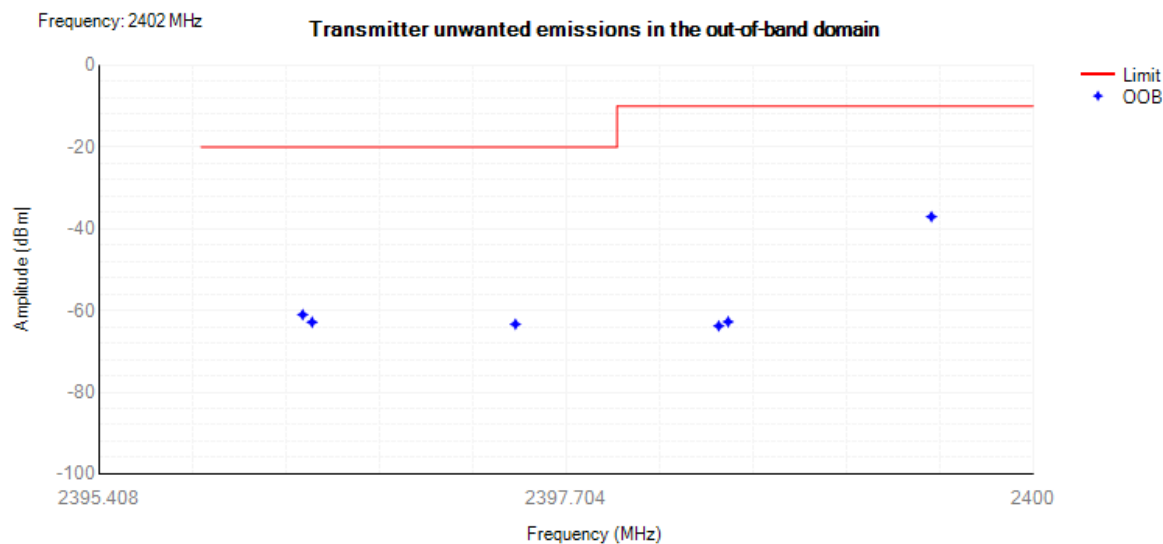

Tx. Emissions OOB NVNT BLE 2480MHz

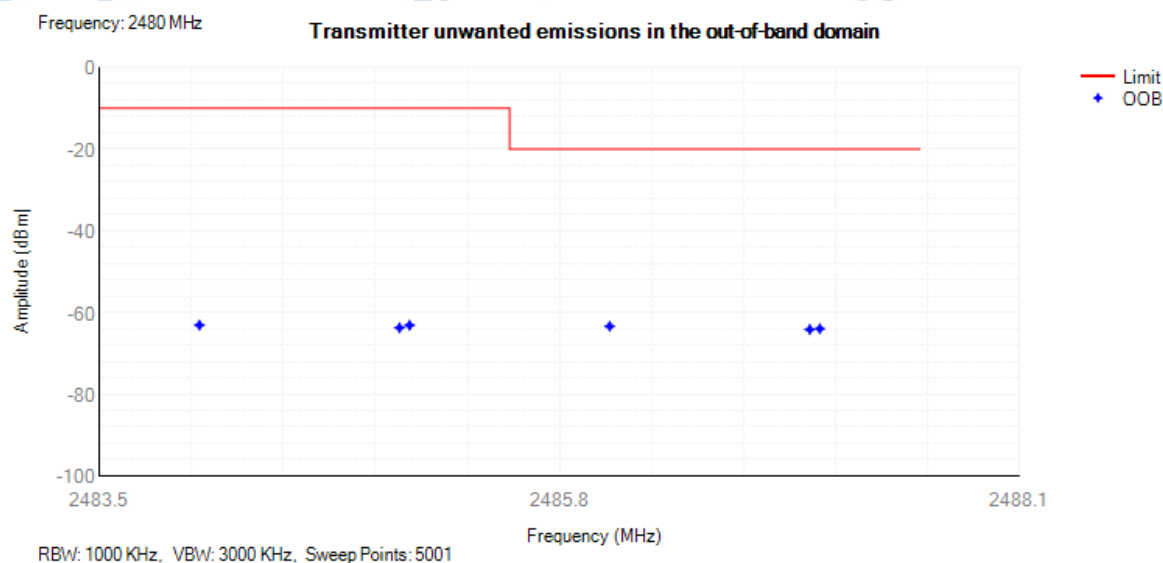


4.11 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -47 MHz	33.35	-66.23	NA	-36	Pass
NVNT	BLE	2402	47 MHz -74 MHz	52	-66.4	NA	-54	Pass
NVNT	BLE	2402	74 MHz -87.5 MHz	74.8	-65.79	NA	-36	Pass
NVNT	BLE	2402	87.5 MHz -118 MHz	92.1	-66.27	NA	-54	Pass
NVNT	BLE	2402	118 MHz -174 MHz	155	-65.24	NA	-36	Pass
NVNT	BLE	2402	174 MHz -230 MHz	198.7	-63.76	NA	-54	Pass
NVNT	BLE	2402	230 MHz -470 MHz	303.2	-64	NA	-36	Pass
NVNT	BLE	2402	470 MHz -694 MHz	514.9	-64.86	NA	-54	Pass
NVNT	BLE	2402	694 MHz -1000 MHz	977.3	-63.45	NA	-36	Pass
NVNT	BLE	2402	1000 MHz -2396 MHz	2274	-48.5	NA	-30	Pass
NVNT	BLE	2402	2487.5 MHz -12750 MHz	6905	-44.93	NA	-30	Pass
NVNT	BLE	2440	30 MHz -47 MHz	32.55	-67.14	NA	-36	Pass
NVNT	BLE	2440	47 MHz -74 MHz	51.3	-65.64	NA	-54	Pass
NVNT	BLE	2440	74 MHz -87.5 MHz	74.25	-66.84	NA	-36	Pass
NVNT	BLE	2440	87.5 MHz -118 MHz	98.7	-66.35	NA	-54	Pass
NVNT	BLE	2440	118 MHz -174 MHz	157.6	-65.38	NA	-36	Pass
NVNT	BLE	2440	174 MHz -230 MHz	213.7	-64.85	NA	-54	Pass
NVNT	BLE	2440	230 MHz -470 MHz	278.25	-64.93	NA	-36	Pass
NVNT	BLE	2440	470 MHz -694 MHz	661.55	-64.39	NA	-54	Pass
NVNT	BLE	2440	694 MHz -1000 MHz	827.65	-54.73	NA	-36	Pass
NVNT	BLE	2440	1000 MHz -2396 MHz	2312	-48.26	NA	-30	Pass
NVNT	BLE	2440	2487.5 MHz -12750 MHz	6979	-44.95	NA	-30	Pass
NVNT	BLE	2480	30 MHz -47 MHz	40.8	-66.77	NA	-36	Pass
NVNT	BLE	2480	47 MHz -74 MHz	69.7	-66.37	NA	-54	Pass
NVNT	BLE	2480	74 MHz -87.5 MHz	87.3	-66.94	NA	-36	Pass
NVNT	BLE	2480	87.5 MHz -118 MHz	117.95	-66.18	NA	-54	Pass
NVNT	BLE	2480	118 MHz -174 MHz	136.6	-65.51	NA	-36	Pass
NVNT	BLE	2480	174 MHz -230 MHz	199.65	-65.08	NA	-54	Pass
NVNT	BLE	2480	230 MHz -470 MHz	314.2	-64.65	NA	-36	Pass
NVNT	BLE	2480	470 MHz -694 MHz	652.15	-65.39	NA	-54	Pass
NVNT	BLE	2480	694 MHz -1000 MHz	961.45	-64.46	NA	-36	Pass
NVNT	BLE	2480	1000 MHz -2396 MHz	2352	-47.38	NA	-30	Pass
NVNT	BLE	2480	2487.5 MHz -12750 MHz	6855	-44.62	NA	-30	Pass

Tx. Spurious NVNT BLE 2402MHz

Frequency: 2402 MHz


Transmitter unwanted emissions in the spurious domain

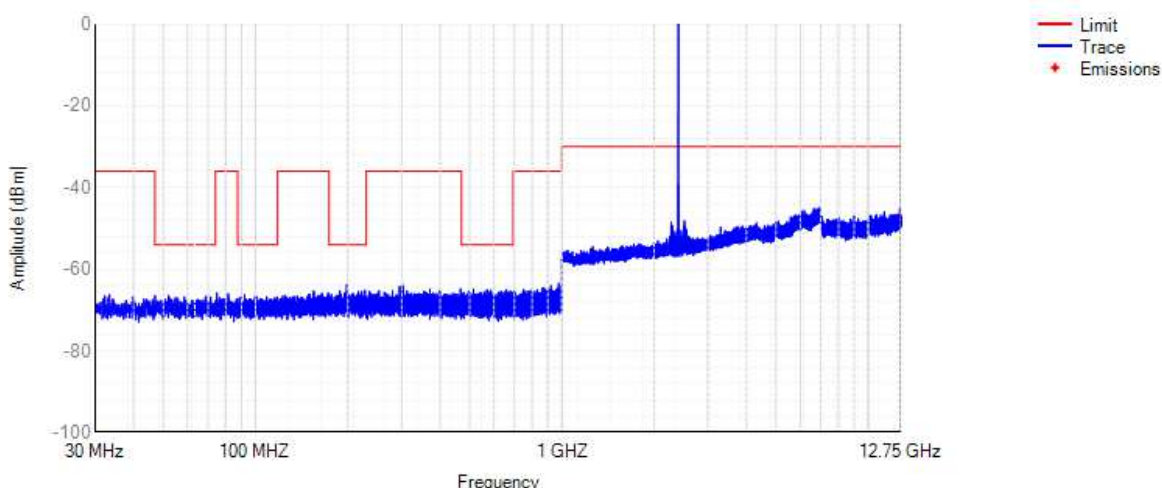

Tx. Spurious NVNT BLE 2440MHz

Frequency: 2440 MHz


Transmitter unwanted emissions in the spurious domain

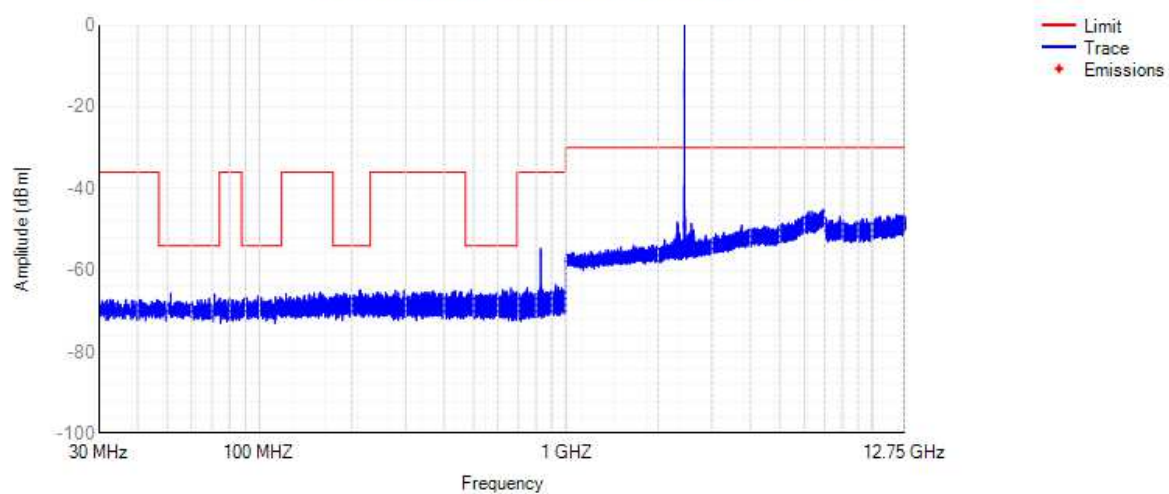

Tx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz


Transmitter unwanted emissions in the spurious domain

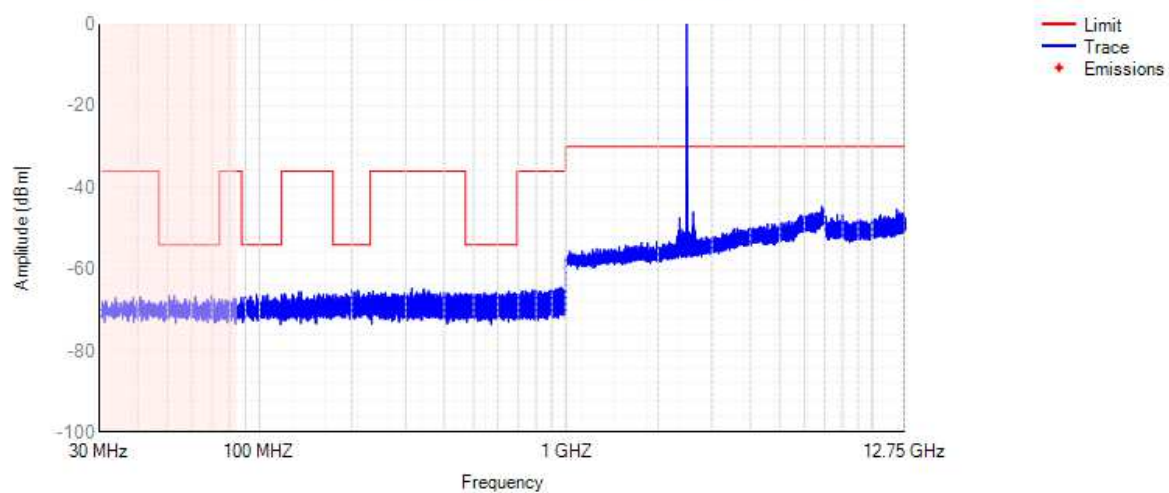


4.12 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level Peak(dBm)	Spur Level RMS(dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	30 MHz -1000 MHz	843.05	-61.5	-60.82	-57	Pass
NVNT	BLE	2402	1000 MHz -12750 MHz	6912	-55.12	NA	-47	Pass
NVNT	BLE	2440	30 MHz -1000 MHz	913.25	-73.92	NA	-57	Pass
NVNT	BLE	2440	1000 MHz -12750 MHz	6961	-55.81	NA	-47	Pass
NVNT	BLE	2480	30 MHz -1000 MHz	843.1	-59.88	-61.33	-57	Pass
NVNT	BLE	2480	1000 MHz -12750 MHz	6202.5	-55.8	NA	-47	Pass

Rx. Spurious NVNT BLE 2402MHz

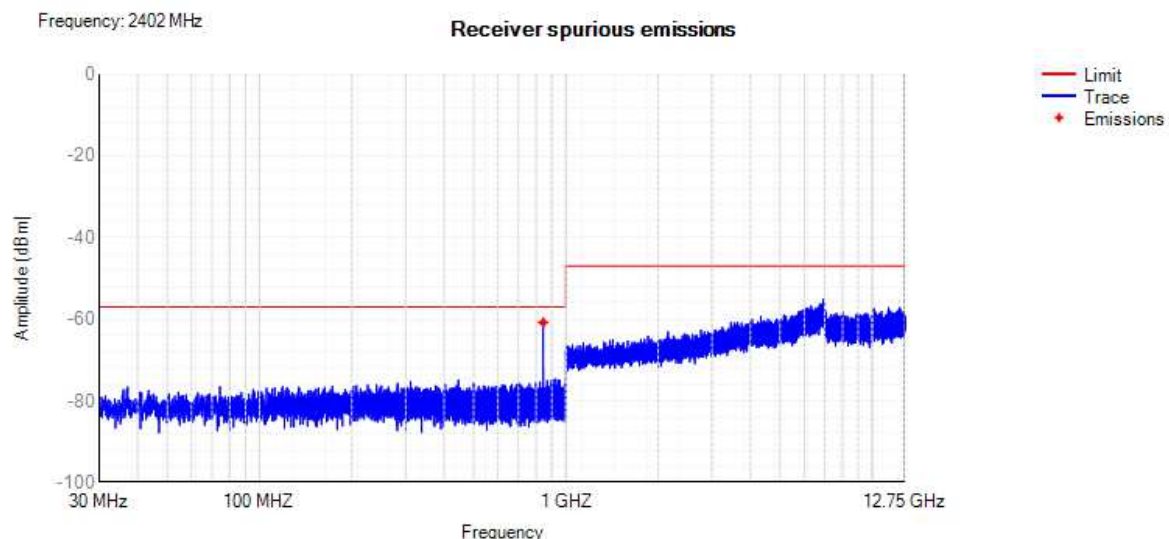


Rx. Spurious NVNT BLE 2440MHz

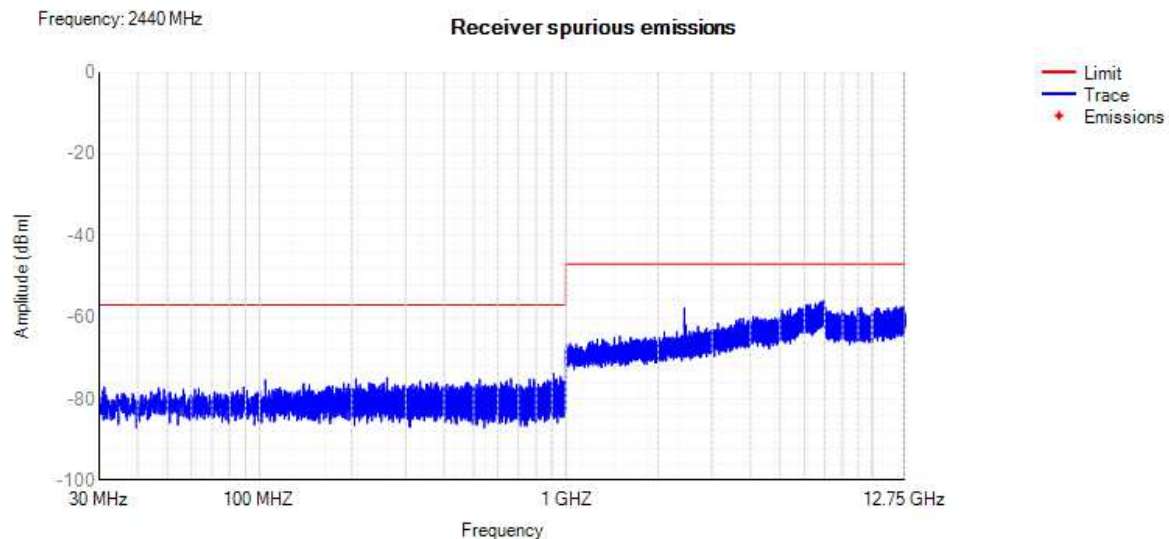

Rx. Spurious NVNT BLE 2480MHz

Frequency: 2480 MHz

Receiver spurious emissions

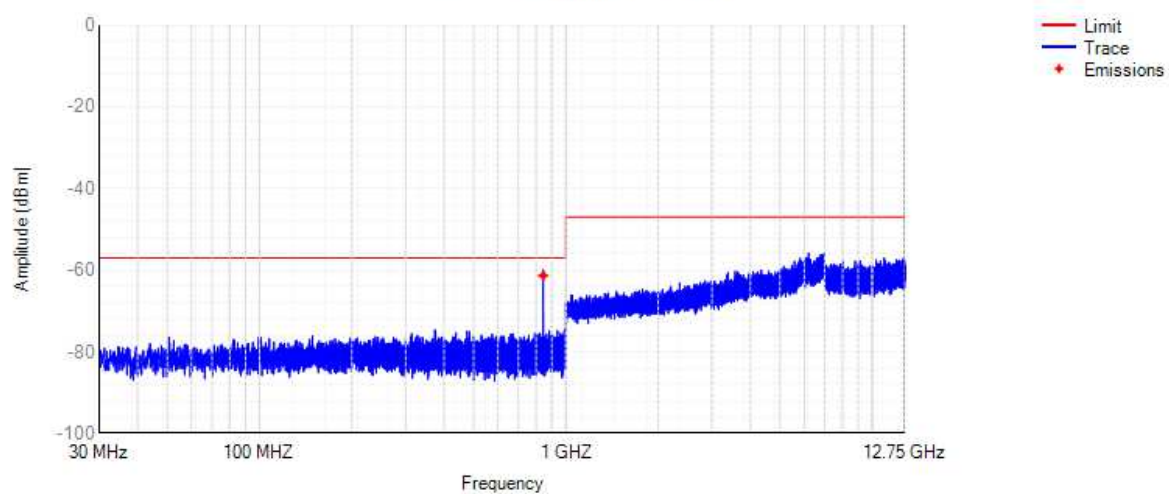

5. EUT TEST PHOTO**SPURIOUS EMISSIONS MEASUREMENT PHOTOS****END OF REPORT**